

FIG. 2 AUDIBLE CODE CALL AUXILIARY CIRCUIT.

- NOTES**
1. FUSE 1.5A PER CIRCUIT.
 2. TO CONTROL LENGTH OF AUDIBLE SIGNALS SHORT CIRCUIT OR PARALLEL RESISTORS AS REQUIRED.
 3. DISCONNECT WIRES ON PS2 BANK OUTLET 19 WHEN 4 UNIT AUDIBLE CODES ARE USED AND WIRES ON PS2 OUTLETS 19 & 19 WHEN 3 UNIT AUDIBLE CODES ARE USED.
 4. ALL WIRING TO BE #25-SWG UNLESS OTHERWISE SPECIFIED.

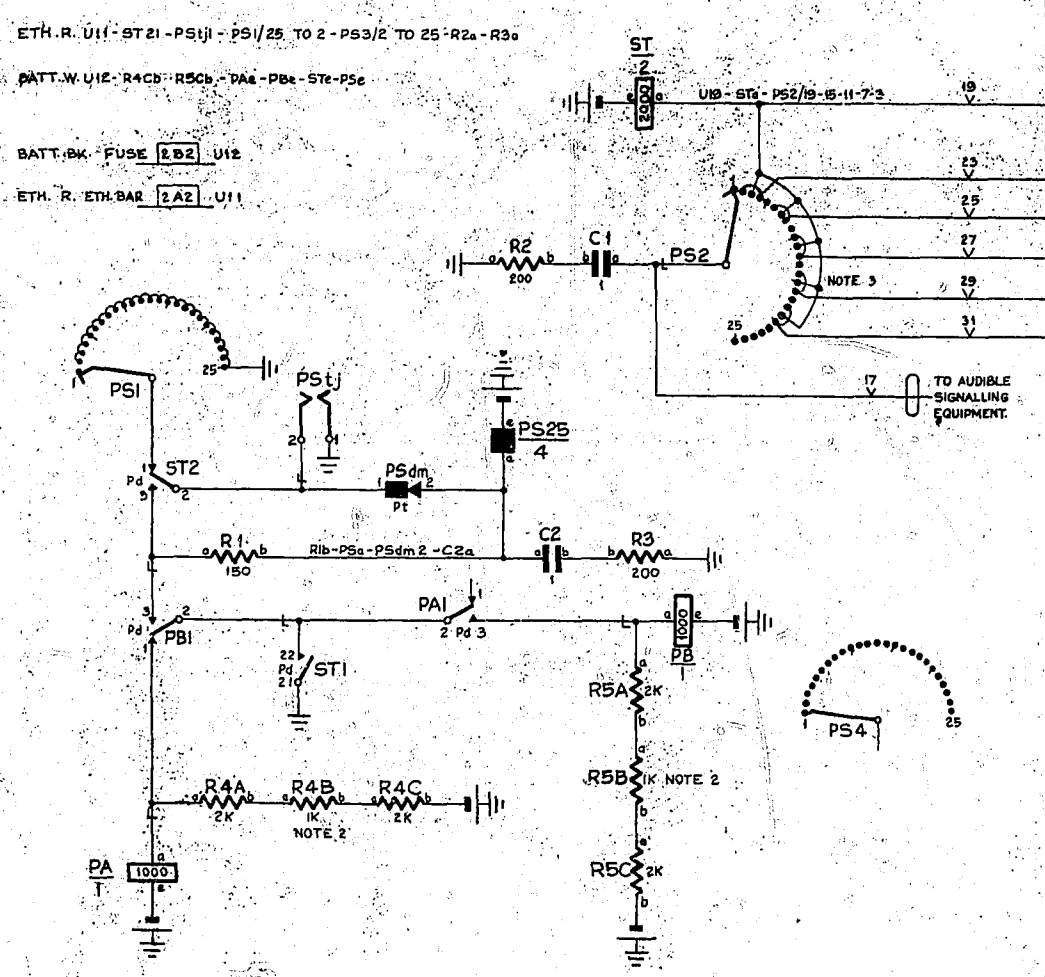


TABLE OF CODES

DIALLED NO. LET	5 LAMP DISPLAY LAMPS ALIGHT					AUDIBLE CODE					4 LAMP DISPLAY LAMPS ALIGHT					AUDIBLE CODE					3 LAMP DISPLAY LAMPS ALIGHT					AUDIBLE CODE				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	1	2	3	4	1	2	3	1	2	3						
4	09	21	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
5	08	22	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
6	07	23	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
7	06	24	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
8	05	25	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
9	04	26	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
10	03	27	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
11	02	28	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
12	01	29	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
13	00	30	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
14	79	31	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
15	78	32	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
16	77	33	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
17	76	34	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
18	75	35	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
19	74	36	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
20	73	37	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
21	72	38	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
22	71	39	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
23	70	40	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
24	69	41	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
25	68	42	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
26	67	43	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
27	66	44	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							
28	65	45	1	2	3	4	5	-	-	-	1	2	3	4	-	-	-	-	-	-	1	2	3							

FIG. 1

- NOTES**
1. FUSE 3.0A PER CIRCUIT.
 2. SHELF JACK U POINTS 9-11 MAKE CONTACT WHEN RELAY SET IS REMOVED.
 3. ON 300 TYPE CUT STRAPS +, -, & - AND H&H OF SELECTED EXTENSION LINE CIRCUIT CONNECT STRAPS -1- ON 120, 125A, 149 TYPES CUT STRAP H&C AND SLEEVE CO2 AND CO3 CONTACT UNITS OF SELECTED EXTENSION LINE CIRCUIT. CONNECT STRAPS -2-
 4. FOR WIRING SEE GBW 14380 OR EQUIV. (300 TYPE) GBW 13300 MOD. A OR EQUIV. (120, 125 & 149 TYPES).
 5. WHEN AUDIBLE SIGNALING IS EMPLOYED: STRAP -3- FOR 3 UNIT SYSTEM (6 CODES) STRAP -4- FOR 4 UNIT SYSTEM (15 CODES) STRAP -5- AND -6- FOR 5 UNIT SYSTEM (25 CODES)
 6. WHEN VISUAL SIGNALING IS EMPLOYED: STRAP -7- FOR 3 LAMP DISPLAY (7 CODES) STRAP -8- AND -9- FOR 4 LAMP DISPLAY (14 CODES) STRAP -10- AND -11- FOR 5 LAMP DISPLAY (25 CODES)
 7. DISCONNECT STRAPS ON UNALLOTTED OUTLETS OF CS4 BANK AS REQUIRED (WIRED FOR 22 CODES)
 8. WHEN AUDIBLE WARNING OF VISUAL CODE IS USED: STRAP -9- FOR SINGLE STROKE BELL. STRAP -10- FOR CONTINUOUS RINGING BELL.
 9. ALL WIRING TO BE #25-SWG UNLESS OTHERWISE SPECIFIED.

ETH. R. U11 - ST21 - PS1j - PS1/25 TO 2 - PS3/2 TO 25 - R2a - R3a
 BATT. W. U12 - R4Cb - R5Cb - PAa - PBa - STa - PSa
 BATT. BK. FUSE 1.5A U12
 ETH. R. ETH. BAR 1A2 U11

CODE CALL CIRCUIT			
(25 VISUAL AND/OR AUDIBLE CODES)			
DI1 ADDED:	(5555)	2A	21/198 J4W
RETRACTED:	(5291)	2	21/174 J4W
	(8943)	F	6/5/62 G.D.
AMENDMENT PARTICULARS		DATE	APP'D
NZ 10	SIZE L	DRAWN	CHECKED
		+	WIRING
			REMOVED
			CIRCUIT
			NO. 117/66
GBW 16860			BOY W