


AS SEEN FROM REAR

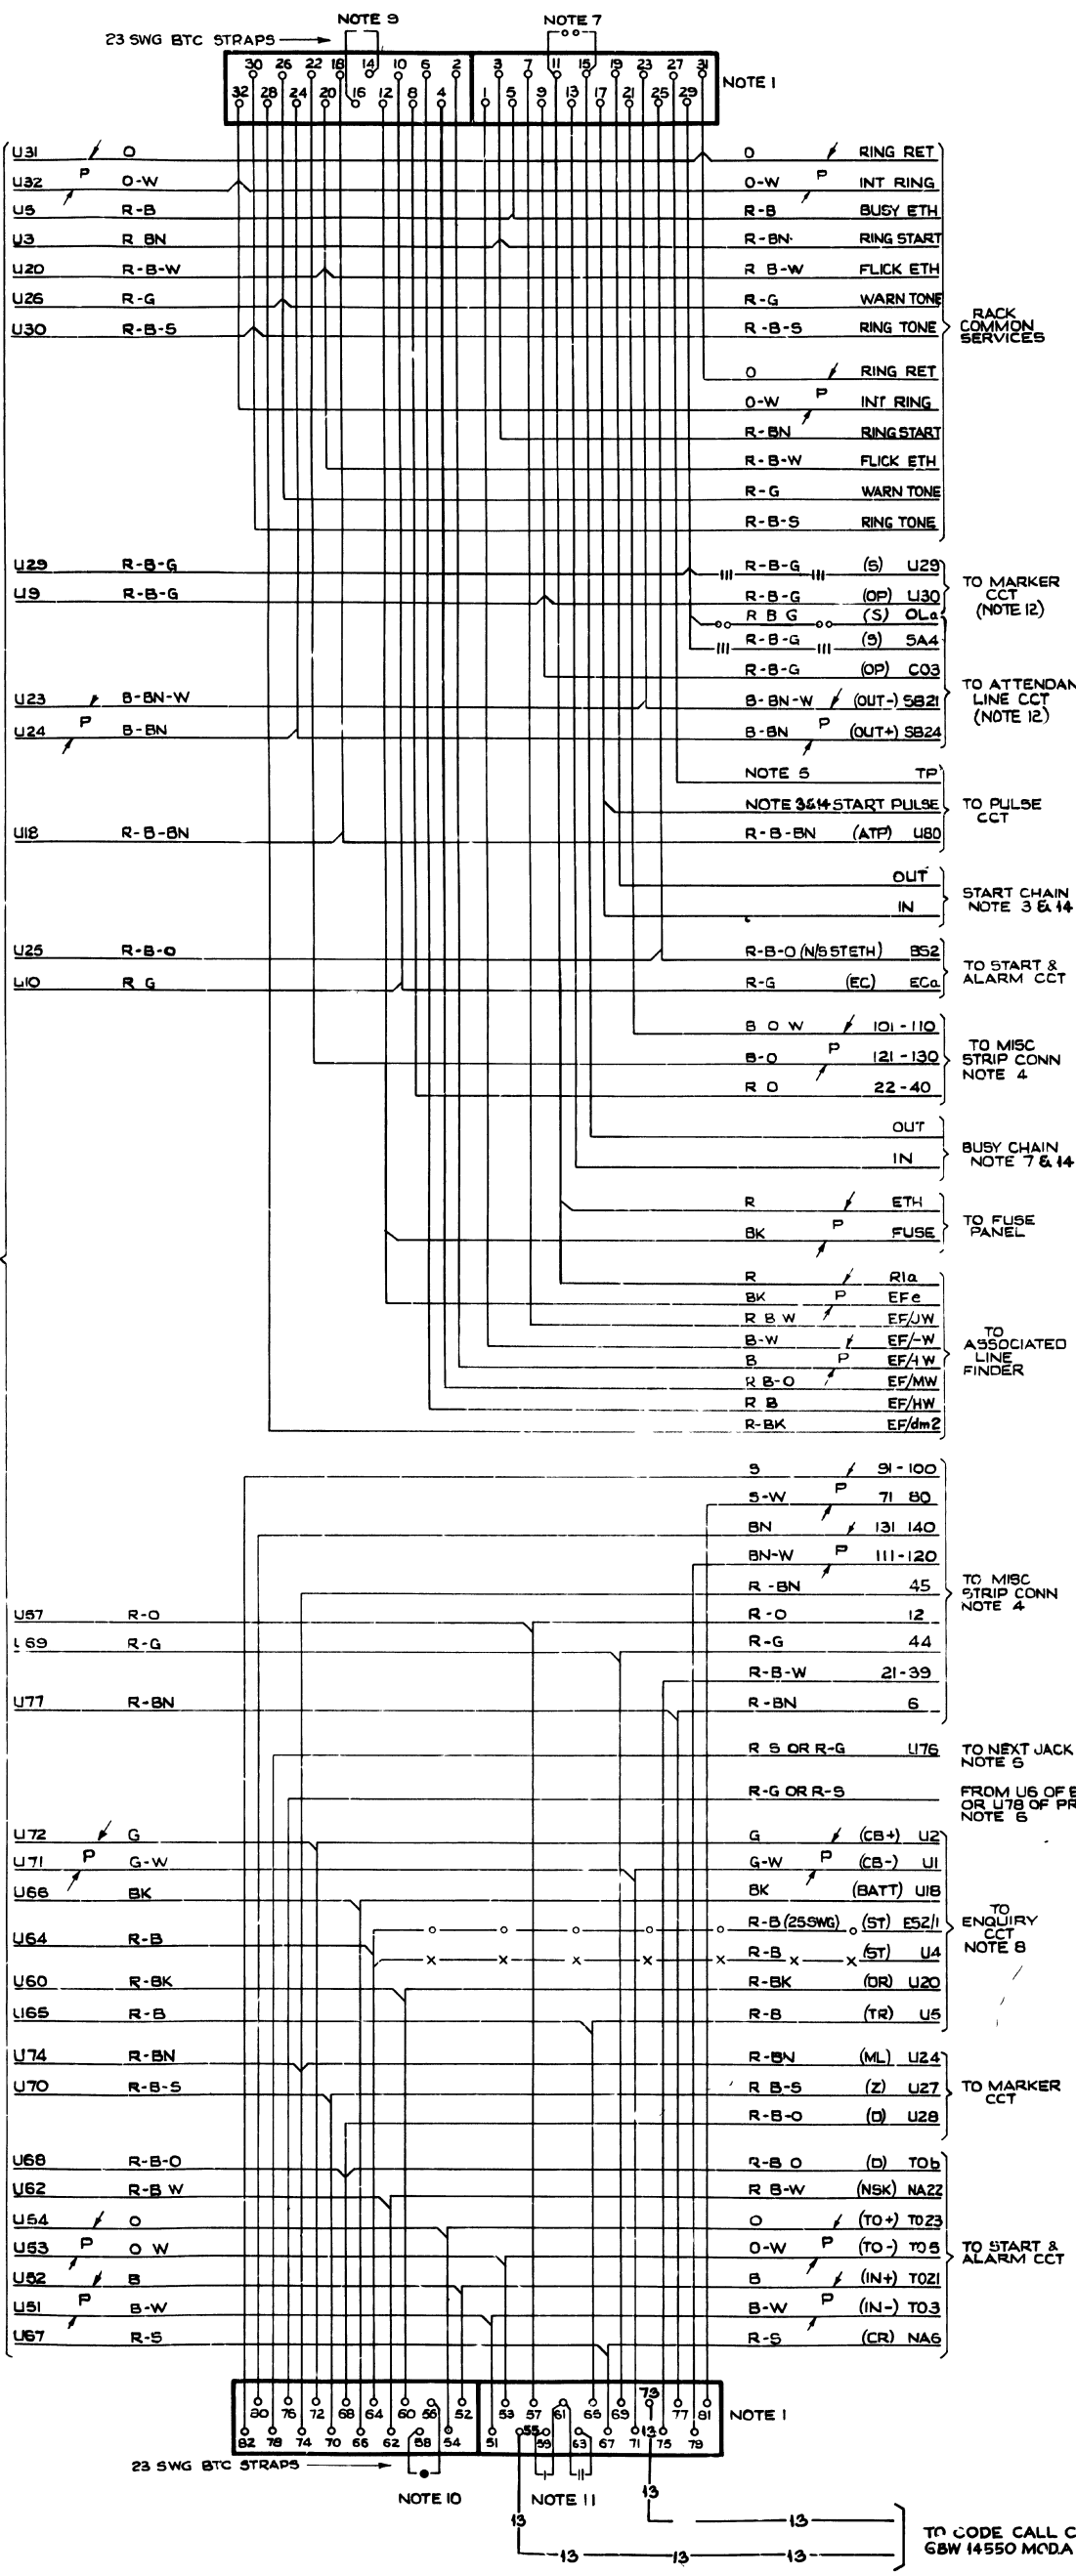

NOTES -

- SHELF JACK POINTS U13-U15 U17-U19 U75 U77 U16-U18, U79-U81 & U80-U82 MAKE CONTACT WHEN RELAY SET IS REMOVED
- ALL WIRING TO BE 23SWG UNLESS OTHERWISE SHOWN
- START CHAIN CONNECTIONS SHALL BE MADE AS FOLLOWS
 

COLOUR	PULSE CCT	TO U17 CCT	TO U13 CCT
P W	U69	1	4
P R-W	U60	3	1
P B-G	U70	2	5
P B-G-W	U63	4	2
P R-S	U64	5	3

COLOUR	PULSE CCT	TO U17 CCT	TO U13 CCT
P R-S	U64	5	1
P G	U67	6	2
P G-W	U68	7	3
P W	U69	1	4
P R-W	U60	3	6
P B-G	U70	2	5
P B-G-W	U63	4	7

COLOUR	PULSE CCT	TO U17 CCT	TO U13 CCT
P R-BK	U62	8	1
P R-W	U66	9	2
P W	U66	10	3
P W	U69	1	4
P R-W	U60	3	6
P B-G	U70	2	5
P B-G-W	U63	4	7
P R-S	U64	5	8
P G	U67	6	9
P G-W	U68	7	10
- TAGS ON MISC STRIP CONN ARE ALLOCATED TO CIRCUITS AS FOLLOWS -
 

EXCH LINE CCT N°	U8	U21	U22	U75	U79	U80	U81	U82
1	22	101	121	21	111	131	71	91
2	24	102	122	23	112	132	72	92
3	26	103	123	25	113	133	73	93
4	28	104	124	27	114	134	74	94
5	30	105	125	29	115	135	75	95
6	32	106	126	31	116	136	76	96
7	34	107	127	33	117	137	77	97
8	36	108	128	35	118	138	78	98
9	38	109	129	37	119	139	79	99
10	40	110	130	39	120	140	80	100
- TP LEADS ON U27 ARE CONNECTED TO JACK POINTS ON THE PULSE RELAY SET AS FOLLOWS -
 

COLOUR	FROM PULSE CCT	TO U27 OF INDICATED CCT
P B-G	U71	20-LINE
P B-G-W	U72	35-LINE
P R-S	U73	49-LINE
P R-BN	U74	1
P R-B-S	U75	2
P R-O	U76	3
P S	U77	4
P S-W	U78	5
P R-B-S	U79	6
P R-BN	U79	7
P R-BN	U79	8
P R-BN	U79	9
P R-BN	U79	10
P R-BN	U79	11
P R-BN	U79	12
P R-BN	U79	13
P R-BN	U79	14
P R-BN	U79	15
P R-BN	U79	16
P R-BN	U79	17
P R-BN	U79	18
P R-BN	U79	19
P R-BN	U79	20
- CONNECTIONS ON U76 & U78 ARE WIRED IN A CHAIN AS FOLLOWS -
  - R-G FROM ENQ CCT U5 TO U76 OF CCT 1
  - R-S FROM U78 OF EACH ODD CCT TO U76 OF NEXT EVEN CCT
  - R-G FROM U78 OF EACH EVEN CCT TO U76 OF NEXT ODD CCT
  - U78 OF THE LAST CCT IS NOT WIRED
- BUSY CHAIN CONNECTIONS ARE WIRED AS FOLLOWS -
  - R-O FROM TAG EB ON BANK STRIP CONN TO U13 OF CCT 1
  - R-G FROM U15 OF EACH ODD CCT TO U13 OF NEXT EVEN CCT
  - R-O FROM U15 OF EACH EVEN CCT TO U13 OF NEXT ODD CCT
  - ON LAST JACK ONLY ADD STRAP U11-U15 SHOWN
- ON 25-LINE PABX INCLUDE CONNECTION SHOWN - - - - -
- ON 35 OR 49 LINE PABX INCLUDE CONN SHOWN - - - - -
- WHEN RING TONE IS TO BE EXTENDED OVER EXCHANGE LINES ON CALLS CONNECTED BY PABX OPERATOR TO LOCAL EXTENSIONS, ADD STRAP U14-U16 SHOWN - - - - -
- WHEN LOCAL EXTENSION IS PERMITTED TO FLASH PUBLIC EXCHANGE OPERATOR ADD STRAP U56 U56 SHOWN - - - - -
- WHEN IMMEDIATE BUSY FACILITY IS REQUIRED ON INCOMING CALLS FROM PUBLIC EXCHANGE -
  - ADD STRAP U59-U61 SHOWN - - - - - WHEN RINGING AT PUBLIC EXCHANGE HAS EARTH RETURN
  - ADD STRAP U61-U63 SHOWN - - - - - WHEN RINGING AT PUBLIC EXCHANGE HAS BATTERY RETURN
- WHEN ATTENDANTS LINE CCT TO GBW 14720 IS FITTED USE CONNECTION SHOWN - - - - - ON NEW WORK WITH ATTENDANTS LINE CCT TO GBW 14721 USE CONNECTION SHOWN - - - - -
- PROVIDE CONNS SHOWN - - - - - WHEN CODE CALL SERVICE REQUIRED
- SEPARATE START & BUSY CHAIN WIRING PROVIDED FOR DIAL 1 & 3 ROUTES. REFER TO 15 108Q PART 1

0  
5 Centimetres  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55  
60

MULTIPLE TO OTHER EXCH LINE CCT JACKS

2  
3  
4  
4  
4  
4  
3  
2

MICROBOX

20, 35 & 49 - LINE PABX EXCHANGE LINE CIRCUIT HAVING OUT SERVICE ON TWO ROUTES AND AUXILIARY SERVICES			
AMENDMENT PARTICULARS		ISSUE DATE	APPRO
NZPO		DRAWN	WIRING CIRCUIT
GBU 14690 MOD.D			