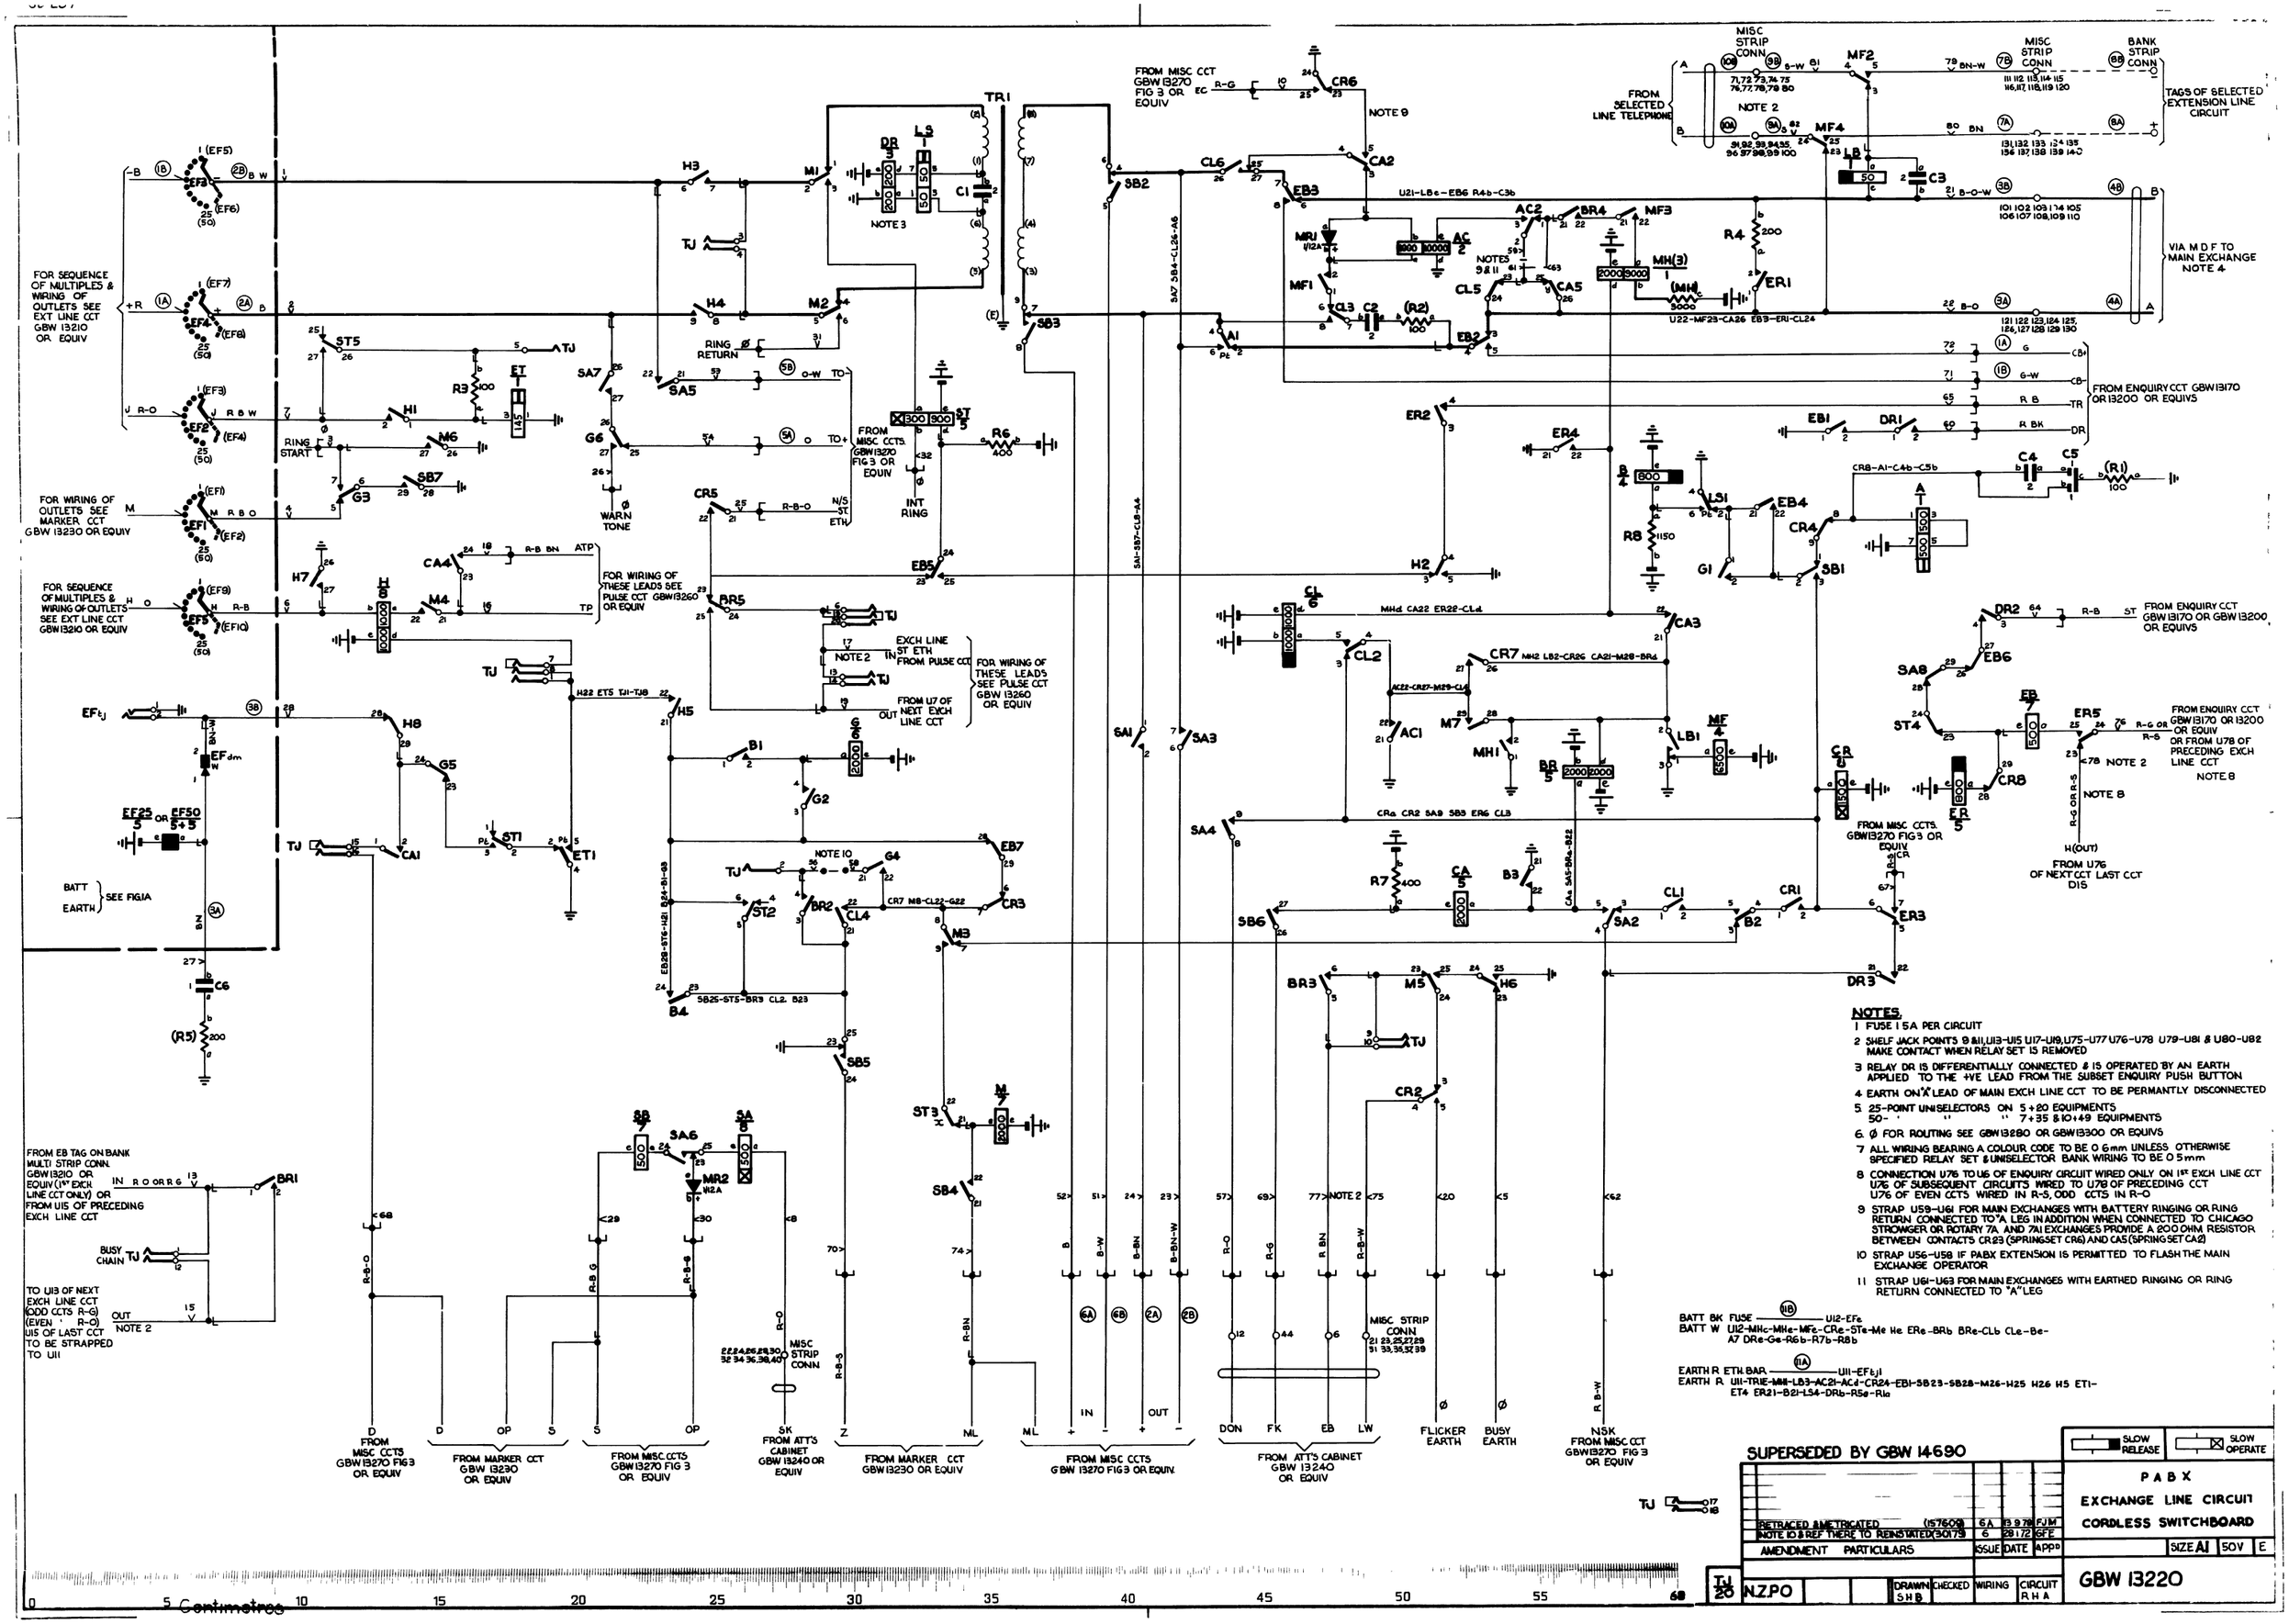
FROM MISC CCT GBW 13270 FIG 3 OR EQUIV
NOTE 9
MISC STRIP CONN
MISC STRIP CONN
BANK STRIP CONN
TAGS OF SELECTED EXTENSION LINE CIRCUIT
FROM SELECTED LINE TELEPHONE
NOTE 2
VIA M D F TO MAIN EXCHANGE NOTE 4
FOR SEQUENCE OF MULTIPLES & WIRING OF OUTLETS SEE EXT LINE CCT GBW 13210 OR EQUIV
FROM ENQUIRY CCT GBW 13170 OR 13200 OR EQUIVS
FOR WIRING OF OUTLETS SEE MARKER CCT GBW 13230 OR EQUIV
FOR SEQUENCE OF MULTIPLES & WIRING OF OUTLETS SEE EXT LINE CCT GBW 13210 OR EQUIV
FOR WIRING OF THESE LEADS SEE PULSE CCT GBW 13260 OR EQUIV
EXCH LINE ST ETH FROM PULSE CCT
FROM U17 OF NEXT EXCH LINE CCT
FOR WIRING OF THESE LEADS SEE PULSE CCT GBW 13260 OR EQUIV
FROM ENQUIRY CCT GBW 13170 OR GBW 13200 OR EQUIVS
FROM ENQUIRY CCT GBW 13170 OR 13200 OR EQUIV OR FROM U78 OF PRECEDING EXCH LINE CCT
NOTE 8
FROM MISC CCTS. GBW 13270 FIG 3 OR EQUIV
FROM U76 OF NEXT CCT LAST CCT DIS
RING RETURN
RING START
WARN TONE
INT RING
FROM MISC CCTS. GBW 13270 FIG 3 OR EQUIV
BATT
EARTH
SEE FIG 1A
FROM EB TAG ON BANK MULTI STRIP CONN. GBW 13210 OR EQUIV (1ST EXCH LINE CCT ONLY) OR FROM U15 OF PRECEDING EXCH LINE CCT
BUSY CHAIN
TO U13 OF NEXT EXCH LINE CCT (ODD CCTS R-G) (EVEN ' R-O) U15 OF LAST CCT TO BE STRAPPED TO U11
FROM MISC CCTS GBW 13270 FIG 3 OR EQUIV
FROM MARKER CCT GBW 13230 OR EQUIV
FROM MISC CCTS GBW 13270 FIG 3 OR EQUIV
FROM ATT'S CABINET GBW 13240 OR EQUIV
FROM MARKER CCT GBW 13230 OR EQUIV
FROM MISC CCTS GBW 13270 FIG 3 OR EQUIV
FROM ATT'S CABINET GBW 13240 OR EQUIV
FLICKER EARTH
BUSY EARTH
FROM MISC CCT GBW 13270 FIG 3 OR EQUIV
NOTES
1 FUSE 1 5A PER CIRCUIT
2 SHELF JACK POINTS 9 &11, U13-U15 U17-U19, U75-U77 U76-U78 U79-U81 & U80-U82 MAKE CONTACT WHEN RELAY SET IS REMOVED
3 RELAY DR IS DIFFERENTIALLY CONNECTED & IS OPERATED BY AN EARTH APPLIED TO THE +VE LEAD FROM THE SUBSET ENQUIRY PUSH BUTTON
4 EARTH ON 'A' LEAD OF MAIN EXCH LINE CCT TO BE PERMANTLY DISCONNECTED
5 25-POINT UNISELECTORS ON 5+20 EQUIPMENTS
50- ' '' '' 7+35 & 10+49 EQUIPMENTS
6 Ø FOR ROUTING SEE GBW 13280 OR GBW 13300 OR EQUIVS
7 ALL WIRING BEARING A COLOUR CODE TO BE 0 6mm UNLESS OTHERWISE SPECIFIED RELAY SET & UNISELECTOR BANK WIRING TO BE 0 5mm
8 CONNECTION U76 TO U16 OF ENQUIRY CIRCUIT WIRED ONLY ON 1ST EXCH LINE CCT U76 OF SUBSEQUENT CIRCUITS WIRED TO U78 OF PRECEDING CCT U76 OF EVEN CCTS WIRED IN R-S, ODD CCTS IN R-O
9 STRAP U59-U61 FOR MAIN EXCHANGES WITH BATTERY RINGING OR RING RETURN CONNECTED TO 'A' LEG IN ADDITION WHEN CONNECTED TO CHICAGO STROWGER OR ROTARY 7A AND 7A1 EXCHANGES PROVIDE A 200 OHM RESISTOR BETWEEN CONTACTS CR23 (SPRINGSET CR6) AND CA5 (SPRING SET CA2)
10 STRAP U56-U58 IF PABX EXTENSION IS PERMITTED TO FLASH THE MAIN EXCHANGE OPERATOR
11 STRAP U61-U63 FOR MAIN EXCHANGES WITH EARTHED RINGING OR RING RETURN CONNECTED TO 'A' LEG
BATT BK FUSE (11B) — U12-EF6
BATT W U12-MH6-MH4-MF6-CR4-ST6-M6 H6 ER4-BR6 BR4-CL6 CL4-B4-CR8-A1 DR4-G4-R6 b-R7 b-R8 b
EARTH R ETH BAR (11A) — U11-EF5,11
EARTH R U11-TR1E-MH4-L83-AC2 b-AC4-CR24-EB1-SB23-SB28-M26-H25 H26 H5 ET1-ET4 ER21-B21-L54-DR5 b-R5 a-R1 a
SUPERSEDED BY GBW 14690
SLOW RELEASE
SLOW OPERATE
RETRACED AMENDMENT (ST6008) 6A 8 9 78 FJM
NOTE ID & REF THERE TO REINSTATED (30179) 6 28 1 72 GFE
AMENDMENT PARTICULARS ISSUE DATE APPD
PABX
EXCHANGE LINE CIRCUIT
CORDLESS SWITCHBOARD
SIZE A1 SOV E
GBW 13220
TJ 20 N.Z.P.O.
DRAWN S.H.B. CHECKED WIRING CIRCUIT R.H.A.