


AS SEEN FROM REAR

NOTE 1

NOTES

- 1 SHELF JACK 'U' POINTS 9 & 11 TO MAKE CONTACT WHEN RELAY SET IS REMOVED.
- 2 THE FOLLOWING RELAY SET POSITION ARE SERVED BY SUPPLY 'A'.  
  
SHELVES A, C & E POSNS. 1, 2, 5, 6, 9 & 10. SHELVES B, D & F POSNS. 3, 4, 7 & 8.  
  
THE FOLLOWING RELAY SET POSITIONS ARE SERVED BY SUPPLY 'B'.  
  
SHELVES A, C & E POSNS. 3, 4, 7 & 8 SHELVES B, D & F POSNS. 1, 2, 5, 6, 9 & 10.
- 3 ALL WIRING UNLESS OTHERWISE SPEC'D TO BE 0.5mm.
- 4 THESE CONNECTIONS ARE NOT PROVIDED WHEN CCT IS USED ON A BOTHWAY LINE.
- 5 PAD CONTROL:-  
FOR REPEATED TRUNKS STRAP U53-U55 FOR UNREPEATED TRUNKS OVER 3db NO STRAP FOR UNREPEATED TRUNKS UNDER 3db STRAP U55-U57.
- 6 WHEN DIRECTLY ASSOC'D WITH MANUAL BOARD (I/C NOT VIA A SELR) OMIT STRAP BETWEEN 'U' POINTS 56 & 58.
- 7 THE SCREENS (OF THE SCREENED PAIRS) TO BE BONDED TOGETHER TO FORM AN ELECTRICALLY CONTINUOUS SCREEN AND CONNECTED TO EARTH AT U11 ON THE FIRST RELAY SET ON THE SHELF WITH 0.7mm. RED.
- 8 ON EQUIPMENT PRIOR TO ISSUE 4 LOWER U POINT TERM. STRIP WAS 16 WAY.
- 9 STRAP U POINTS 61 & 65 ON UNIDIRECTIONAL CIRCUITS ONLY.

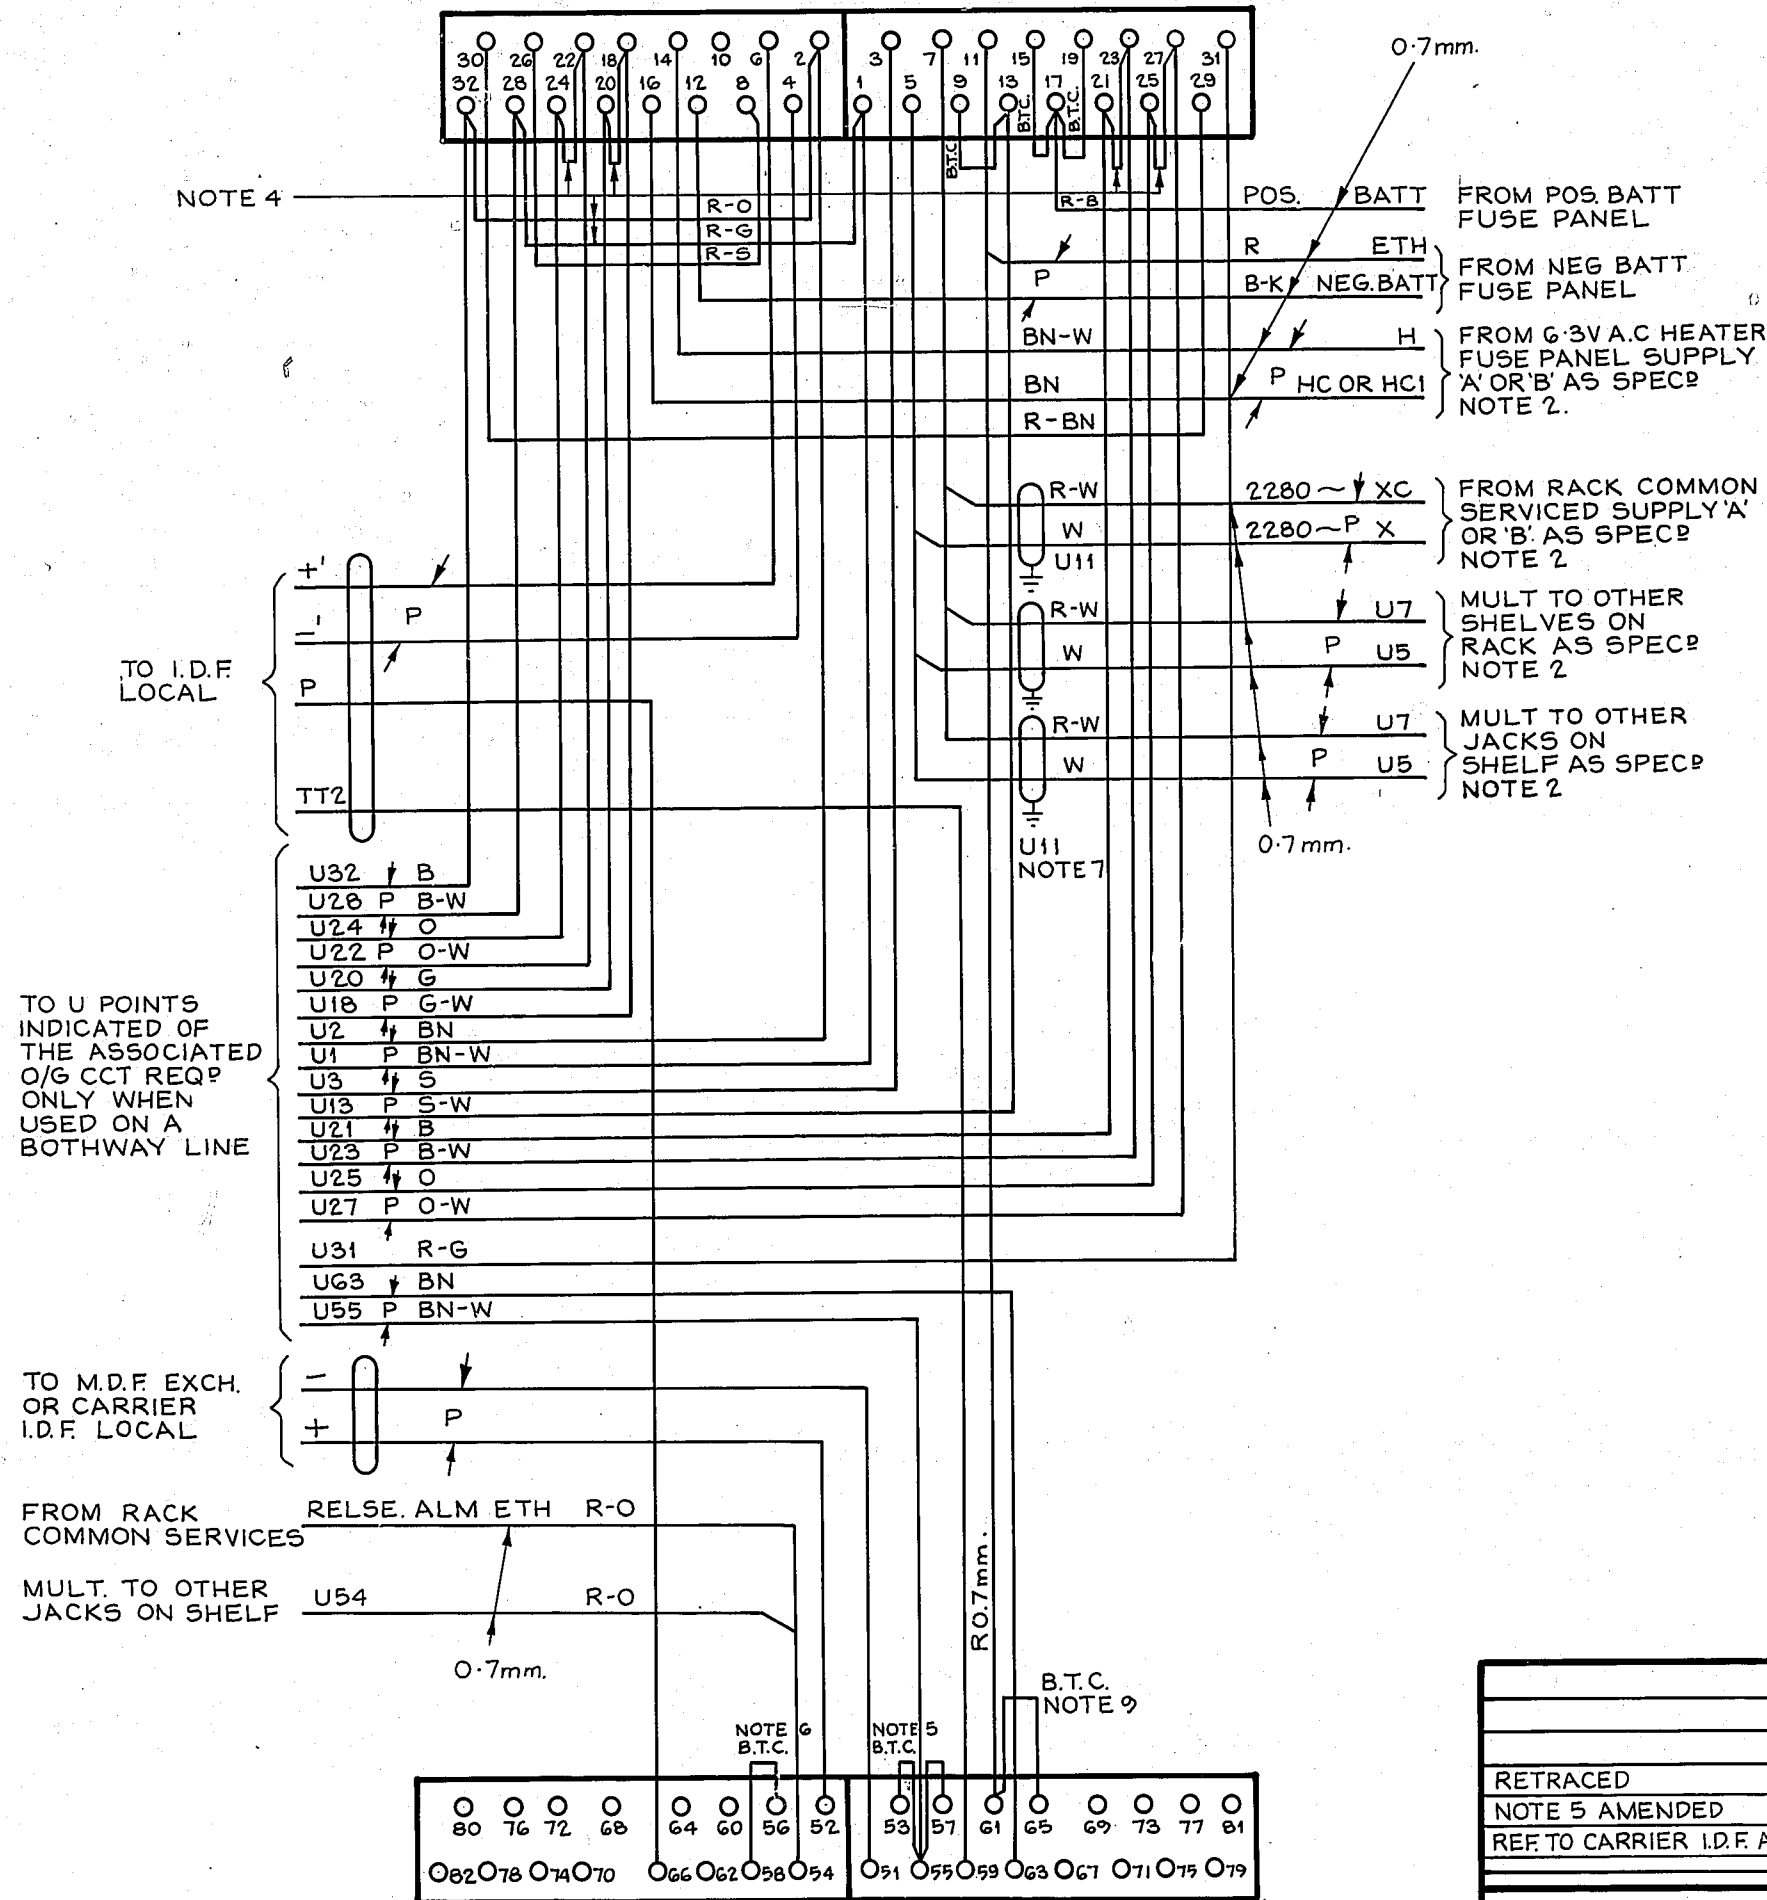

PROOF

				I/C LINE CIRCUIT	
				N.Z. SIGNALLING SYSTEM	
				A.C. No 2	
RETRACED	(183013)	8A	31-10-79		
NOTE 5 AMENDED	(13750)	8	1-10-70	R.W	
REF TO CARRIER I.D.F. ADDED, NOTE 5 AMD	(21536)	7	20-4-70	R.W	
		ISS	DATE	APP	REF:
					50V S
AMENDMENT PARTICULARS					
NZPO	25	DRAWN	CHECKED	WIRING	CIRCUIT
		GA.	HBB	30	GA
				GBU 11670	
				35 11671	
				40	