


AS SEEN FROM REAR.

NOTES 1 & 3

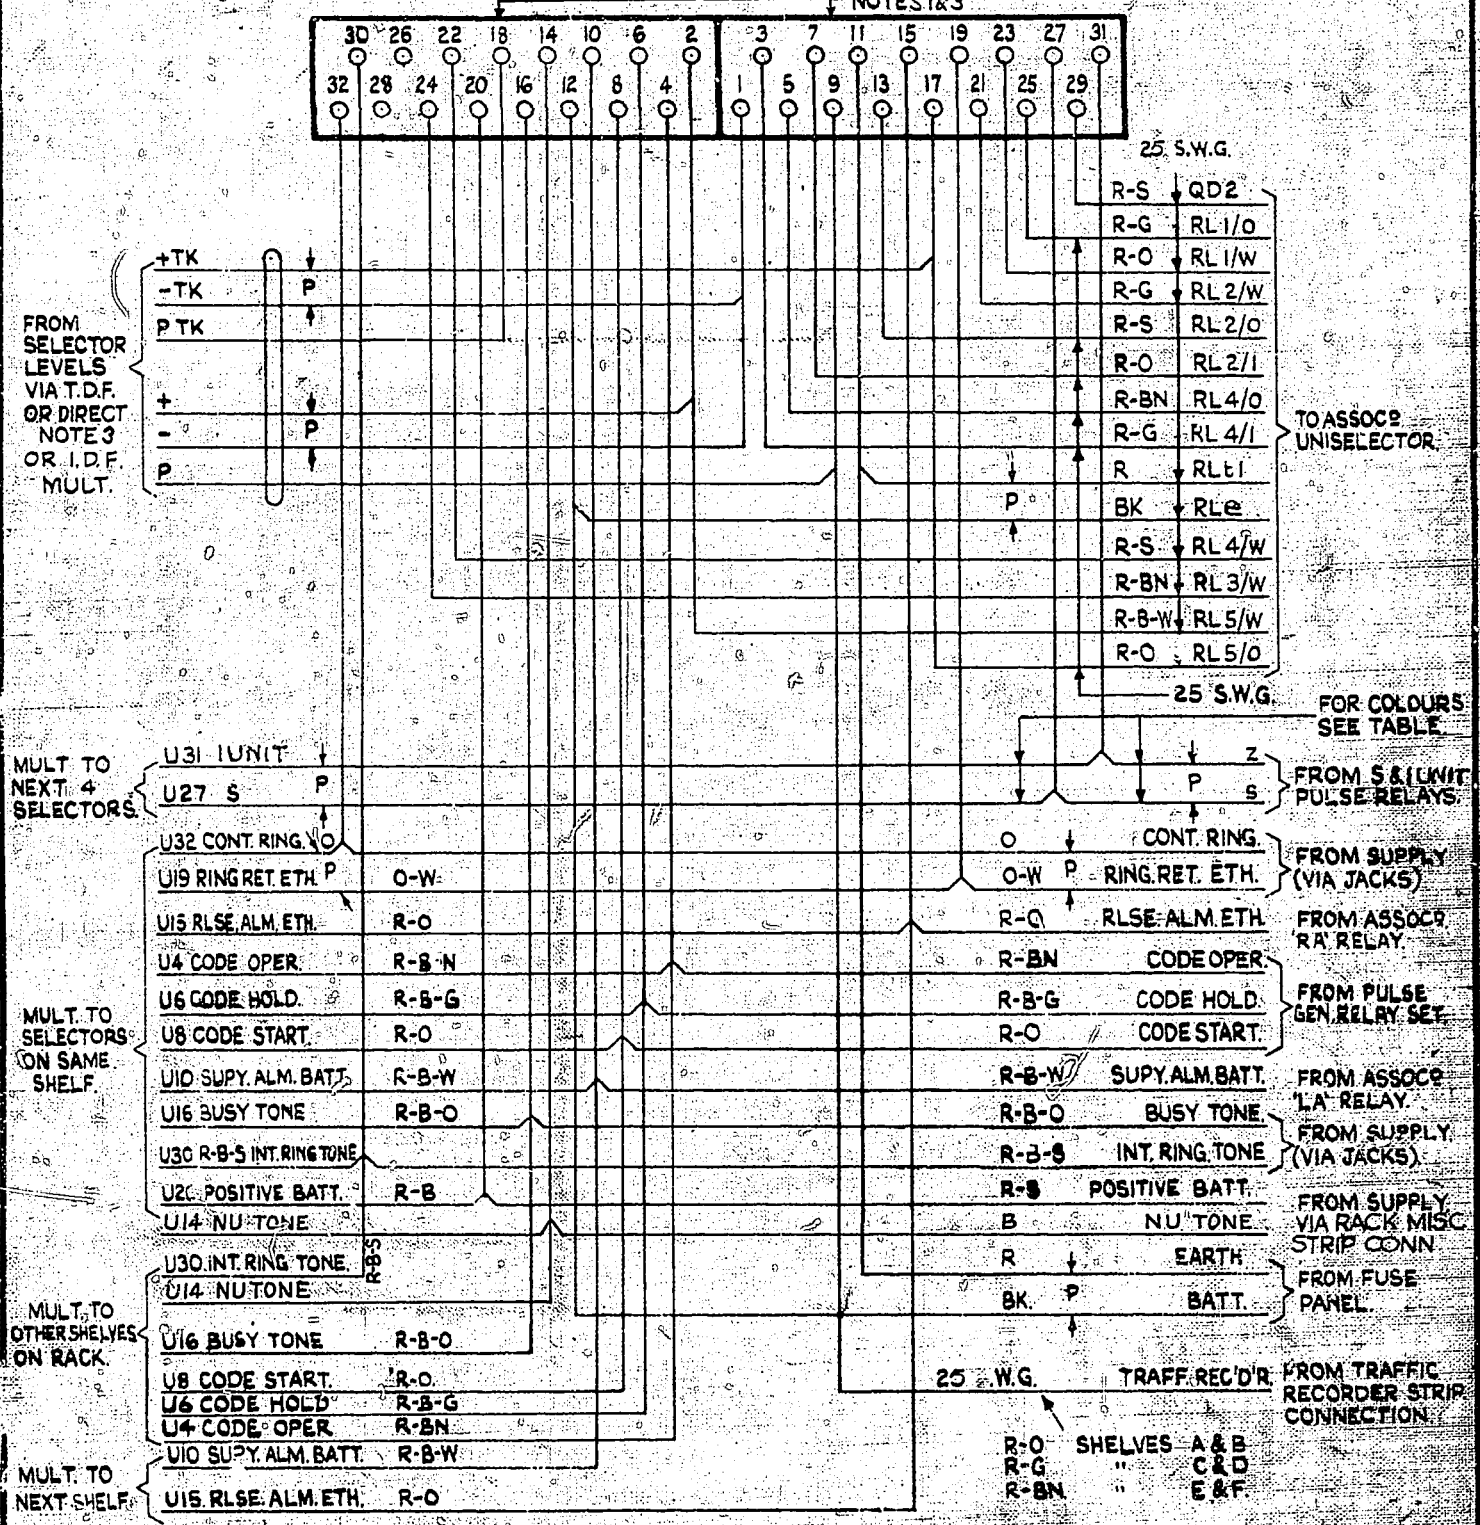

NOTES

1. JACK POINTS U9 & U11 TO MAKE CONTACT WHEN SELECTOR IS REMOVED.
2. ALL WIRING TO BE 22 SWG UNLESS OTHERWISE SPECIFIED.
3. WHEN OUTLETS FROM GROUP SELECTORS ARE CABLED DIRECT THE FOLLOWING STRAPS MUST BE APPLIED:
 - (a) WHEN THE SELECTOR IS A COMBINED TYPE STRAP U POINTS 9 & 18
 - (b) WHEN THE SELECTOR IS AN ORDINARY TYPE STRAP U POINTS 11 & 18
 - (c) WHEN NO SELECTOR IS EQUIPPED STRAP U POINTS 9 & 11 & 18

U27	U31	SELECTORS
G	G-W	1-5 SHELVES A & D
B	B-W	6-10 " A & D
O	O-W	1-5 " A & E
BN	BN-W	6-10 " B & E
S	S-W	1-5 " C & F
W	W-W	6-10 " C & F

FU MARTON

100 LINE RURAL FINAL SELECTOR
ORDINARY & TOLL
POSITIVE BATTERY MEASURING
2000 TYPE

U14 NU TONE EARTH ADDED (89064)		A	7-10-48	25
AMENDMENT PARTICULARS		ISSUE DATE	APPD	REF.
N.Z.P.O.	DRAWN	CHECKED	WIRING	CIRCUIT
	C.L.S.	F.S.B.		

GRJ 11800 MOD A

5 Centimetres



15

20

25