


AS SEEN FROM REAR.

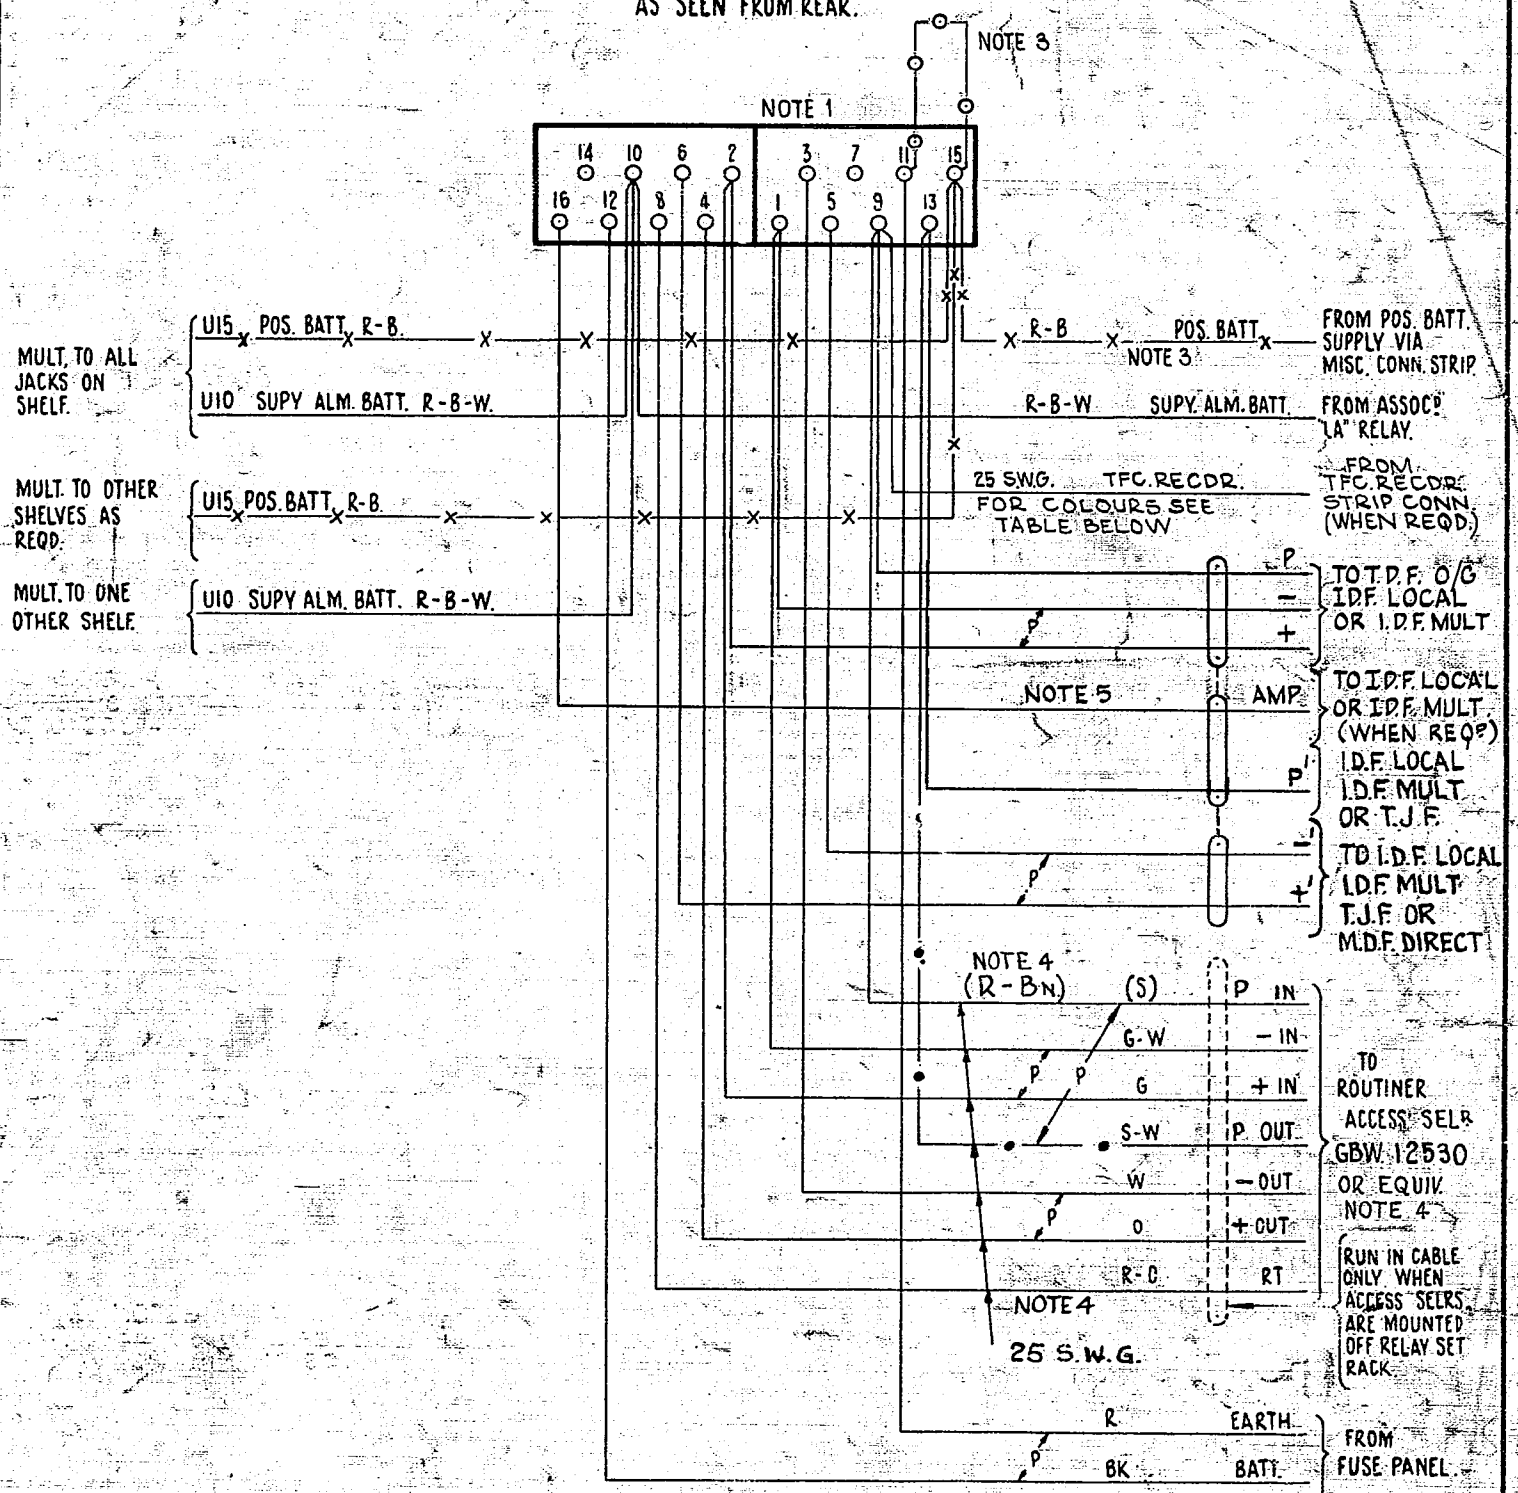

NOTES.

1. U9 & 11 TO MAKE CONTACT WHEN RELAY SET IS REMOVED.
2. ALL WIRES UNLESS OTHERWISE STATED TO BE 22 SWG.
3. WHEN METERING IS NOT REQUIRED DISCONNECT POS. BATT. WIRING & STRAP U15 - U11 SHOWN.
4. WHEN ROUTINER ACCESS SELECTOR IS TO GBW 11551 'P' OUT (U13) IS NOT WIRED & THE 'P' IN LEAD (U9) IS WIRED IN R-BN AND THE RT (U8) LEAD IS WIRED TO HA TERMINATION ON ACCESS SELECTOR.
5. THIS LEAD PROVIDED FOR OPERATION OF 2-WIRE AMPLIFIERS (NEGISTORS) & IS ONLY CABLED TO IDF. WHEN REQD.

SHELVES	COLOUR
1st PAIR	R-O
2nd PAIR	R-G
3rd PAIR	R-BN.
4th PAIR	R-S
5th PAIR	R-B-W

CONN. TO U16 & NOTE 5 ADDED. (69502)	7	18.11.63	DBH.
ALL REFS TO 'S-W' IN RT. LEADS AND NOTE 4 DELETED (2305)	6	22.4.60	JK
NOTE 4 REVISED TFC RECORDER SHELF LEADS AMENDED (28440)	15	15.12.59	AK
NOTE 4 & REFS ADDED (69240)	4	16.7.57	AKS
TFC REC'DR. LEAD & TABLE ADDED (69240)	3	16.7.57	AKS
NOTE 3 ADDED. (32179)	2	9.5.55	AKS
(31431)	1	4.5.54	AKS
AMENDMENT PARTICULARS	ISSUE	DATE	APPD
NZ P.O.			

**AUTO TO AUTO RELAY SET
WITH
FORWARD HOLDING
2000 TYPE.**

GBU. 12130.

50V