
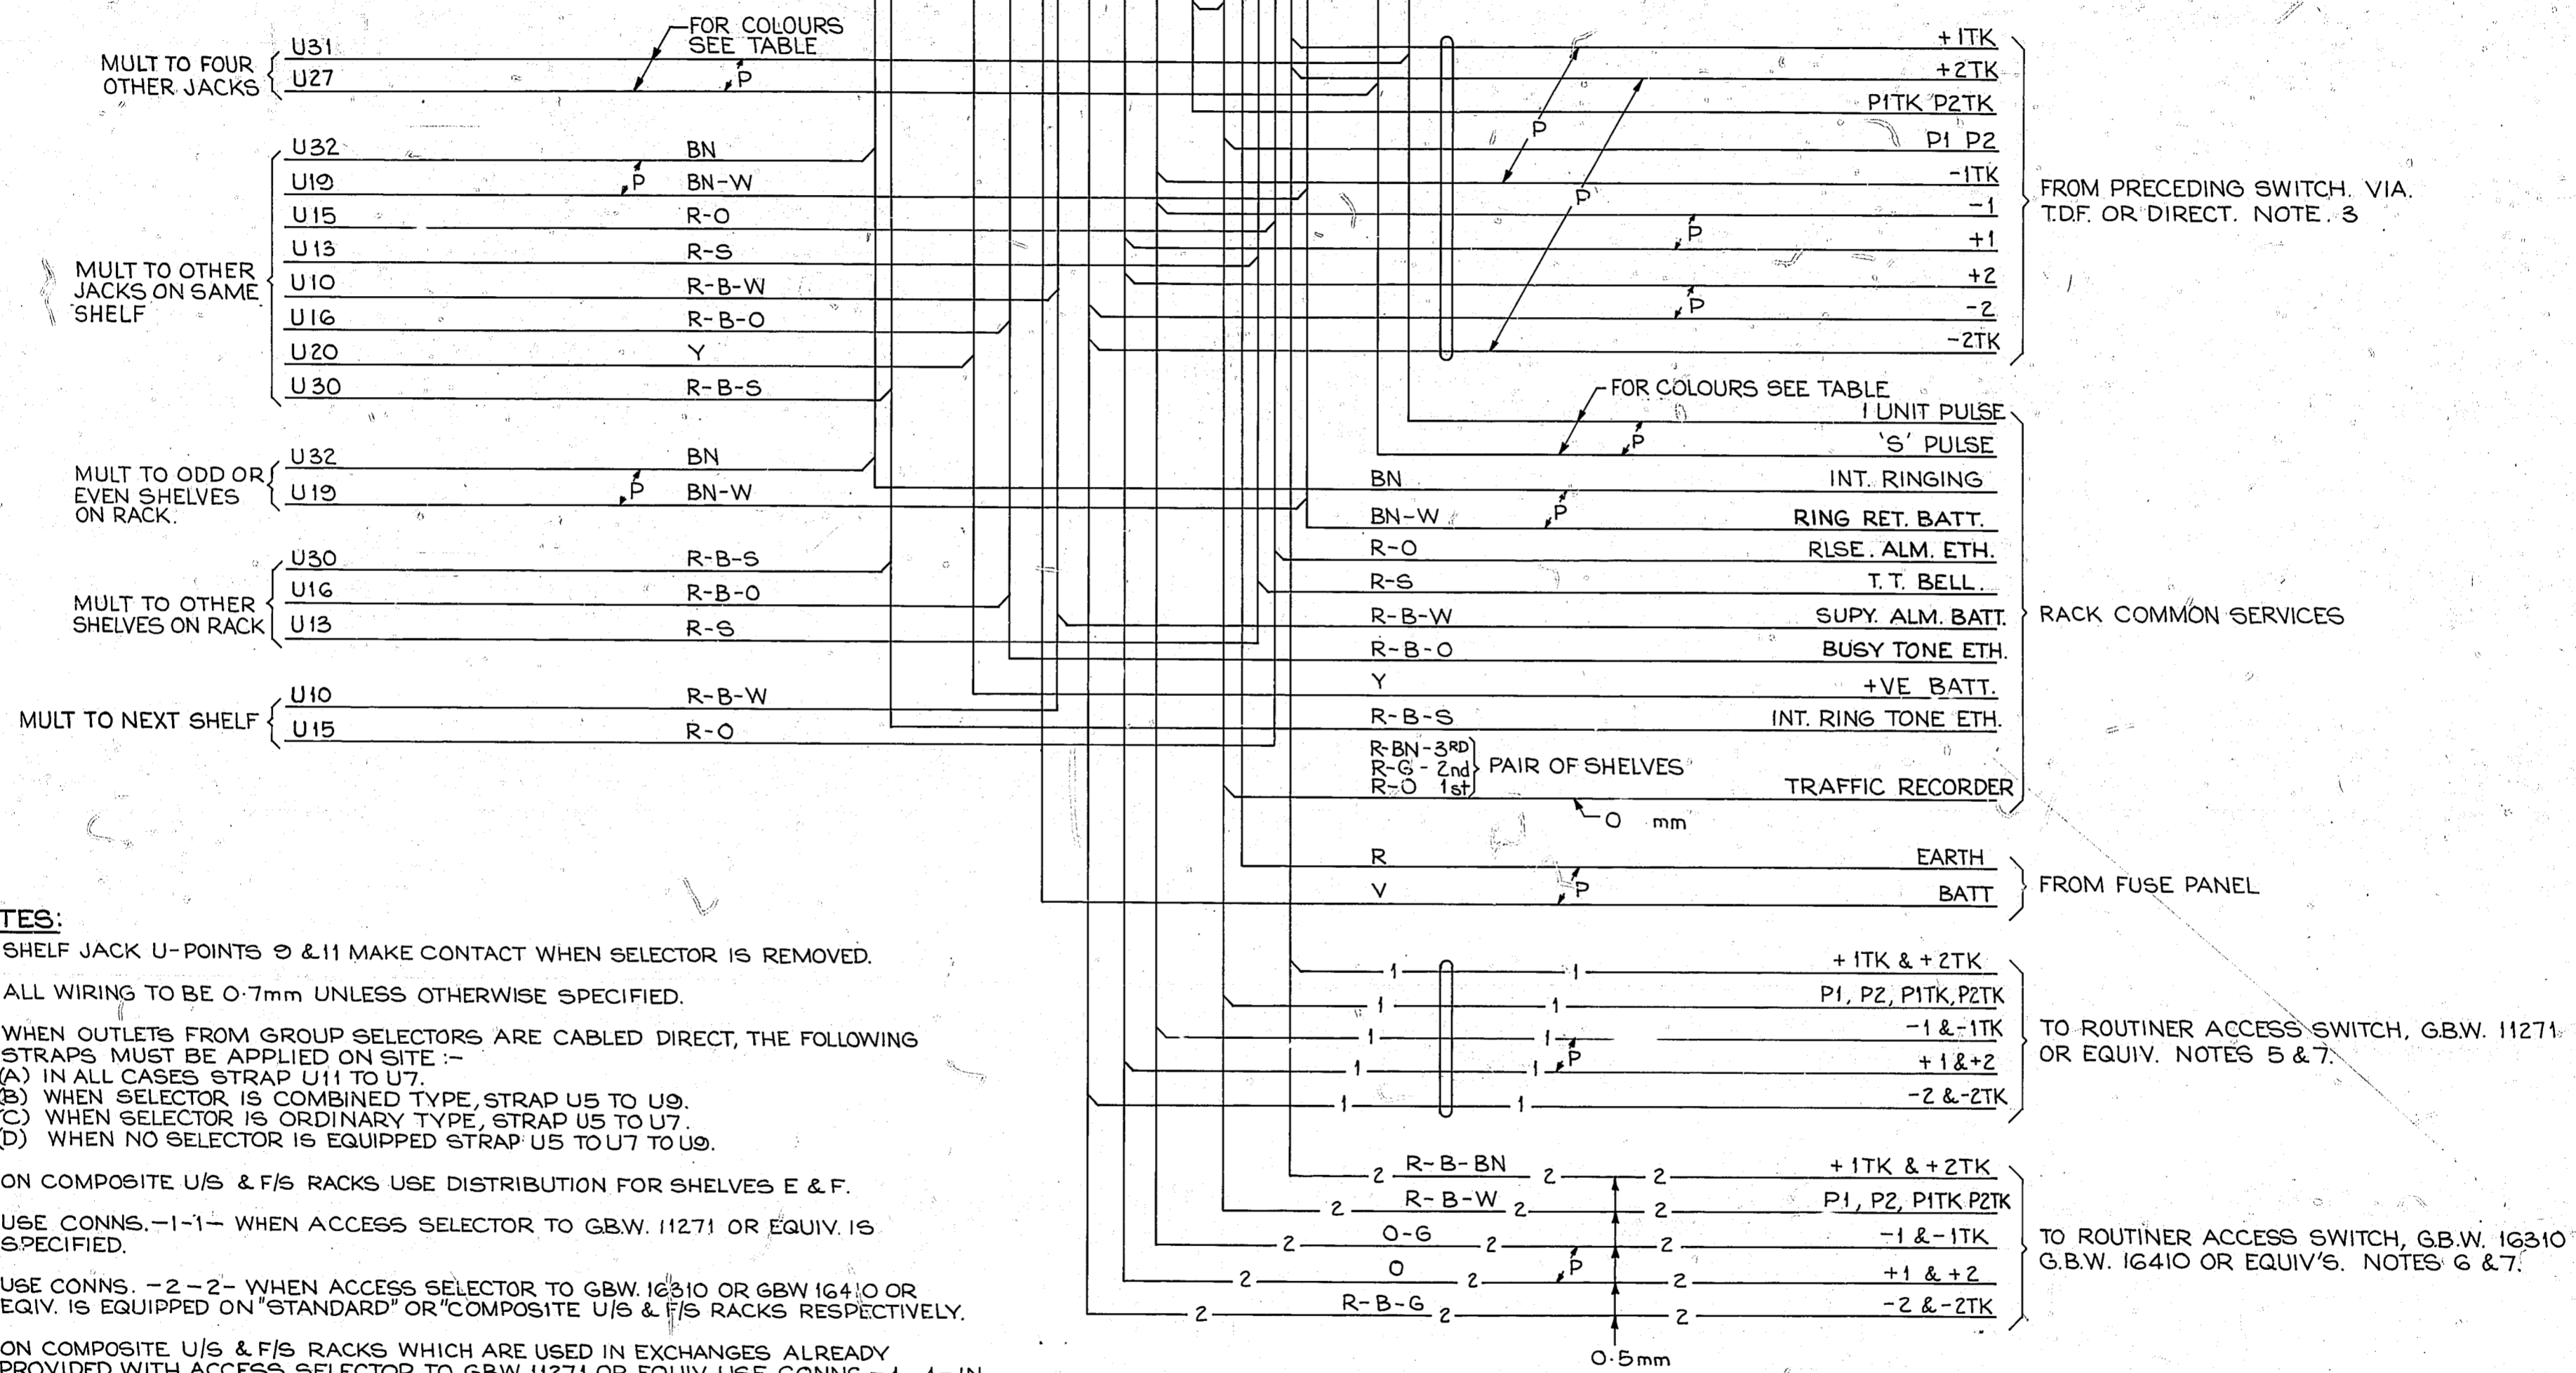


AS SEEN FROM REAR

NOTES: 1 & 3

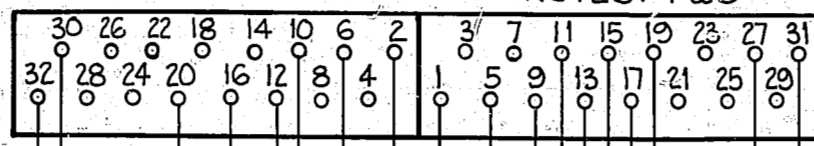

NOTES:

1. SHELF JACK U-POINTS 0 & 11 MAKE CONTACT WHEN SELECTOR IS REMOVED.
2. ALL WIRING TO BE 0.7mm UNLESS OTHERWISE SPECIFIED.
3. WHEN OUTLETS FROM GROUP SELECTORS ARE CABLED DIRECT, THE FOLLOWING STRAPS MUST BE APPLIED ON SITE :-  
 (A) IN ALL CASES STRAP U11 TO U7.  
 (B) WHEN SELECTOR IS COMBINED TYPE, STRAP U5 TO U9.  
 (C) WHEN SELECTOR IS ORDINARY TYPE, STRAP U5 TO U7.  
 (D) WHEN NO SELECTOR IS EQUIPPED STRAP U5 TO U7 TO U9.
4. ON COMPOSITE U/S & F/S RACKS USE DISTRIBUTION FOR SHELVES E & F.
5. USE CONNS. -1-1- WHEN ACCESS SELECTOR TO GBW. 11271 OR EQUIV. IS SPECIFIED.
6. USE CONNS. -2-2- WHEN ACCESS SELECTOR TO GBW. 16310 OR GBW 16410 OR EQUIV. IS EQUIPPED ON "STANDARD" OR "COMPOSITE U/S & F/S RACKS RESPECTIVELY.
7. ON COMPOSITE U/S & F/S RACKS WHICH ARE USED IN EXCHANGES ALREADY PROVIDED WITH ACCESS SELECTOR TO GBW 11271 OR EQUIV. USE CONNS -1-1- IN ADDITION TO CONNS -2-2- REFERRED TO IN NOTE 6. IN WHICH CASE THE UNISELECTOR ACCESS SELR EQUIPPED ON THE RACK IS NOT USED.
8. ON SOME EARLY EQUIPMENT -VE BATTERY WIRING IS BK, AND +VE BATTERY WIRING IS R-B.

U27	U31	SELECTORS
G +	G-W	1-5 SHELVES A & D
B +	B-W	6-10 " A & D
O +	O-W	1-5 " B & E
BN +	BN-W	6-10 " B & E
S +	S-W	1-5 " C & F
W +	R-W	6-10 " C & F

NOTE 4

200 LINE FINAL SELECTOR			
2-10 RBX. WITH TOLL FACILITIES			
POSITIVE BATTERY METERING			
1000 TYPE			
RETRACED & METRICATED (157652)	8A	12.6.78	RED
BATT. WIRING COLOURS CHANGED. NOTE 8 ADD. (1583)	8	18.12.63	72
AMENDMENT PARTICULARS.	ISSUE	DATE	APPD
NZPO	DRAWN	CHKD	WIRING CIRCUIT
GBU. 10800 10802			
10801			

50V E