
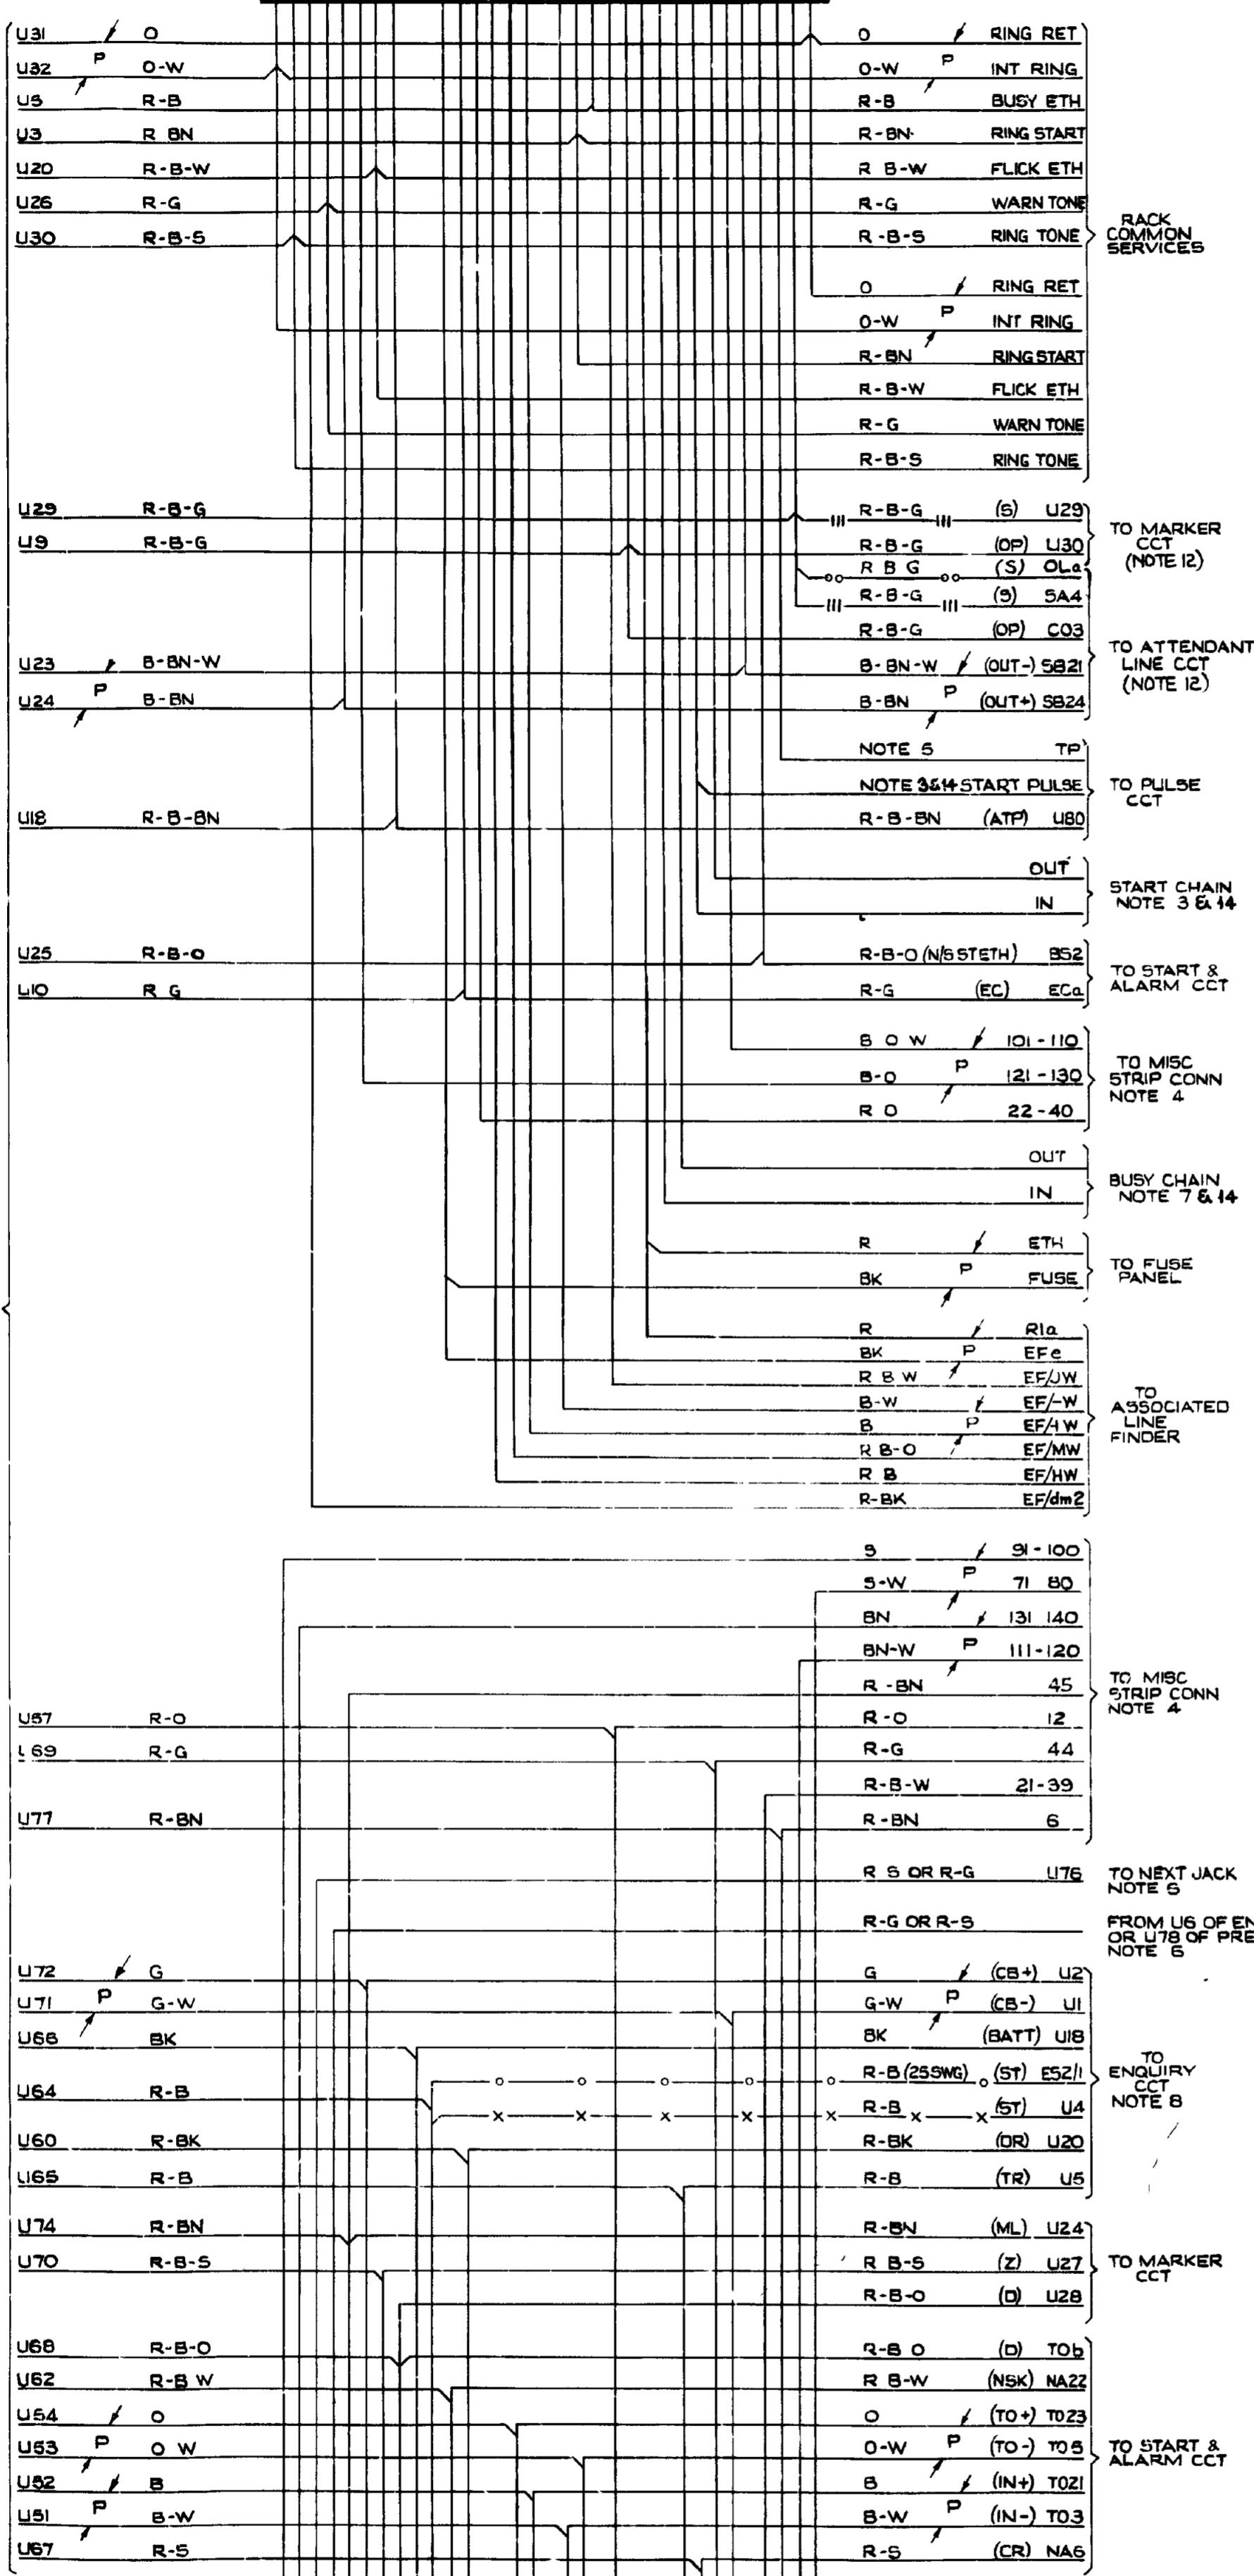


AS SEEN FROM REAR

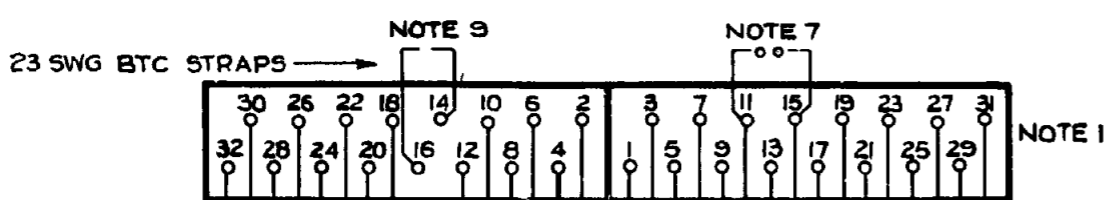

NOTES -

- 1 SHELF JACK POINTS U13-U15 U17-U19 U75 U77 U76-U78, U79-U81 & U80-U82 MAKE CONTACT WHEN RELAY SET IS REMOVED
- 2 ALL WIRING TO BE 23SWG UNLESS OTHERWISE SHOWN
- 3 START CHAIN CONNECTIONS SHALL BE MADE AS FOLLOWS  

COLOUR	PULSE CCT	TO U17 CCT	TO U19 CCT
P W	U69	1	4
P R-W	U60	3	1
P B-G	U70	2	5
P B-G-W	U63	4	2
P R-S	U64	5	3

COLOUR	PULSE CCT	TO U17 CCT	TO U19 CCT
P R-S	U64	5	1
P G	U67	6	2
P G-W	U68	7	3
P W	U69	1	4
P R-W	U60	3	6
P B-G	U70	2	5
P B-G-W	U63	4	7

COLOUR	PULSE CCT	TO U17 CCT	TO U19 CCT
P R-BK	U62	8	1
P R-W	U65	9	2
P W	U66	10	3
P W	U69	1	4
P R-W	U60	3	6
P B-G	U70	2	5
P B-G-W	U63	4	7
P R-S	U64	5	8
P G	U67	6	9
P G-W	U68	7	10
- 4 TAGS ON MISC STRIP CONN ARE ALLOCATED TO CIRCUITS AS FOLLOWS -  

EXCH LINE CCT N <sup>o</sup>	U8	U21	U22	U75	U79	U80	U81	U82
1	22	101	121	21	111	131	71	91
2	24	102	122	23	112	132	72	92
3	26	103	123	25	113	133	73	93
4	28	104	124	27	114	134	74	94
5	30	105	125	29	115	135	75	95
6	32	106	126	31	116	136	76	96
7	34	107	127	33	117	137	77	97
8	36	108	128	35	118	138	78	98
9	38	109	129	37	119	139	79	99
10	40	110	130	39	120	140	80	100
- 5 TP LEADS ON U27 ARE CONNECTED TO JACK POINTS ON THE PULSE RELAY SET AS FOLLOWS -  

COLOUR	FROM PULSE CCT	TO U27 OF INDICATED CCT		
		20-LINE	35-LINE	49-LINE
P B-G	U71	1	1	1
P B-G-W	U72	2	2	2
P R-S	U73	—	5	5
P R-BN	U74	—	—	8
P R-B-S	U75	3	3	3
P R-O	U76	4	—	9
P S	U77	—	6	6
P S-W	U78	—	7	7
P R-B-S	U78	—	—	10
P R-BN	U79	5	4	4
- 6 CONNECTIONS ON U76 & U78 ARE WIRED IN A CHAIN AS FOLLOWS -  
R-G FROM ENQ CCT U6 TO U76 OF CCT 1  
R-S FROM U78 OF EACH ODD CCT TO U76 OF NEXT EVEN CCT  
R-G FROM U78 OF EACH EVEN CCT TO U76 OF NEXT ODD CCT  
U78 OF THE LAST CCT IS NOT WIRED
- 7 BUSY CHAIN CONNECTIONS ARE WIRED AS FOLLOWS -  
R-O FROM TAG EB ON BANK STRIP CONN TO U13 OF CCT 1  
R-G FROM U15 OF EACH ODD CCT TO U13 OF NEXT EVEN CCT  
R-O FROM U15 OF EACH EVEN CCT TO U13 OF NEXT ODD CCT  
ON LAST JACK ONLY ADD STRAP U11-U15 SHOWN
- 8 ON 25-LINE PABX INCLUDE CONNECTION SHOWN - - -  
ON 35 OR 49 LINE PABX INCLUDE CONN SHOWN - - - X - - -
- 9 WHEN RING TONE IS TO BE EXTENDED OVER EXCHANGE LINES ON CALLS CONNECTED BY PABX OPERATOR TO LOCAL EXTENSIONS, ADD STRAP U14-U16 SHOWN - - -
- 10 WHEN LOCAL EXTENSION IS PERMITTED TO FLASH PUBLIC EXCHANGE OPERATOR ADD STRAP U56 U56 SHOWN - - -
- 11 WHEN IMMEDIATE BUSY FACILITY IS REQUIRED ON INCOMING CALLS FROM PUBLIC EXCHANGE -  
ADD STRAP U59-U61 SHOWN - - - I - - - WHEN RINGING AT PUBLIC EXCHANGE HAS EARTH RETURN  
ADD STRAP U61-U63 SHOWN - - - II - - - WHEN RINGING AT PUBLIC EXCHANGE HAS BATTERY RETURN
- 12 WHEN ATTENDANTS LINE CCT TO GBW 14720 IS FITTED USE CONNECTION SHOWN - - - III - - -  
ON NEW WORK WITH ATTENDANTS LINE CCT TO GBW 14721 USE CONNECTION SHOWN - - - 00 - - -
- 13 PROVIDE CONNS SHOWN - - - 13 - - - WHEN CODE CALL SERVICE REQUIRED
- 14 SEPARATE START & BUSY CHAIN WIRING PROVIDED FOR DIAL 1 & 3 ROUTES. REFER TO 16 1080 PART 1

MULTIPLE TO OTHER EXCH LINE CCT JACKS

GBU 14690 MOD.D

20, 35 & 49 - LINE PABX EXCHANGE LINE CIRCUIT HAVING OUT SERVICE ON TWO ROUTES AND AUXILIARY SERVICES			
AMENDMENT PARTICULARS		ISSUE DATE	APPRO
N.Z.P.O.		DRAWN	WIRING CIRCUIT
		ISSUE DATE	APPRO
GBU 14690 MOD.D			