


0
5 Centimetres
10
15
20
25
30

AS SEEN FROM REAR

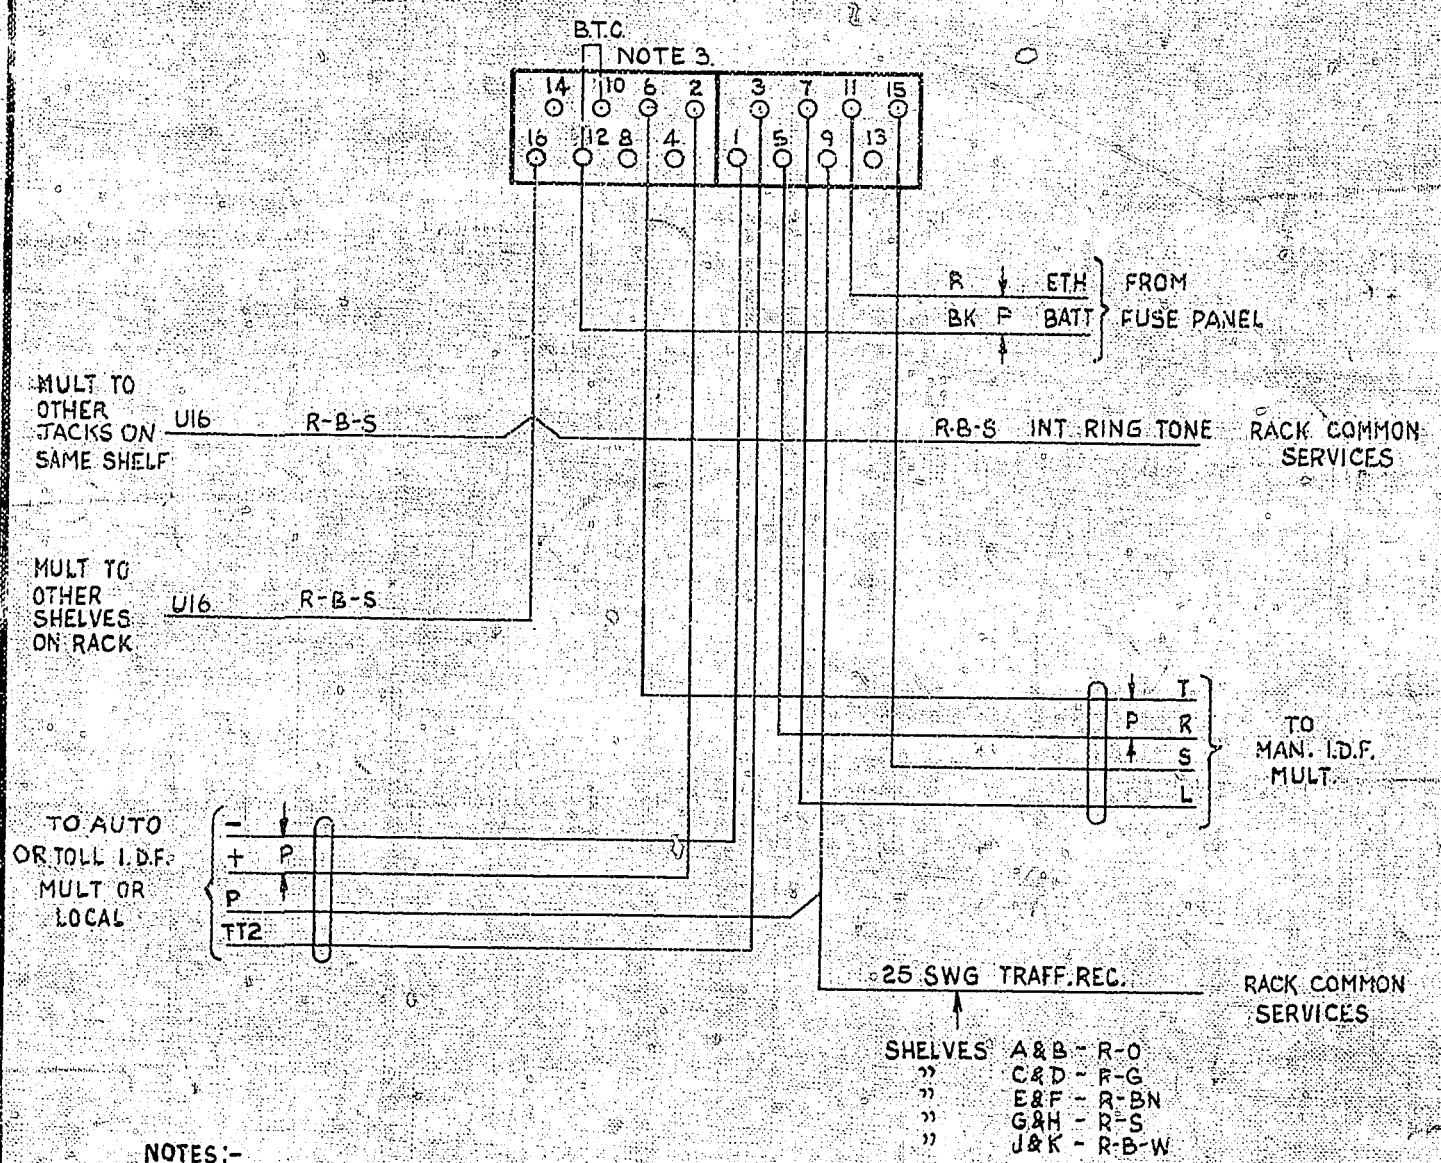

NOTES:-

1. SHELF JACK POINTS U9 & U11 TO MAKE CONTACT WHEN RELAY SET IS REMOVED.
2. ALL WIRING TO BE 22 S.W.G. UNLESS OTHERWISE SPECIFIED.
3. WHEN PRECEDING SELECTOR IS BATTERY TESTING STRAP SHELF JACK: U POINTS 10-12. WHEN PRECEDING SELECTOR TESTS FOR ABSENCE OF EARTH OMIT THIS STRAP.

"O" LEVEL RELAY SET				
ACCESSIBLE FROM I.V.F. OR Z.V.F. LINE CCTS VIA TANDEM GROUP SELECTOR (SLEEVE CONTROL MANUAL BOARD)				
2000 TYPE				
NOTE 3 ADDED	(5041)	2	12.9.62	OK
	(28302)	1	2.11.59	OK
AMENDMENT PARTICULARS		ISSUE DATE	APP.	50V S
N.Z.P.O.		DRAWN	CHECKED	WIRING
		390	390	29/0
GBU 12850				