


AS SEEN FROM REAR

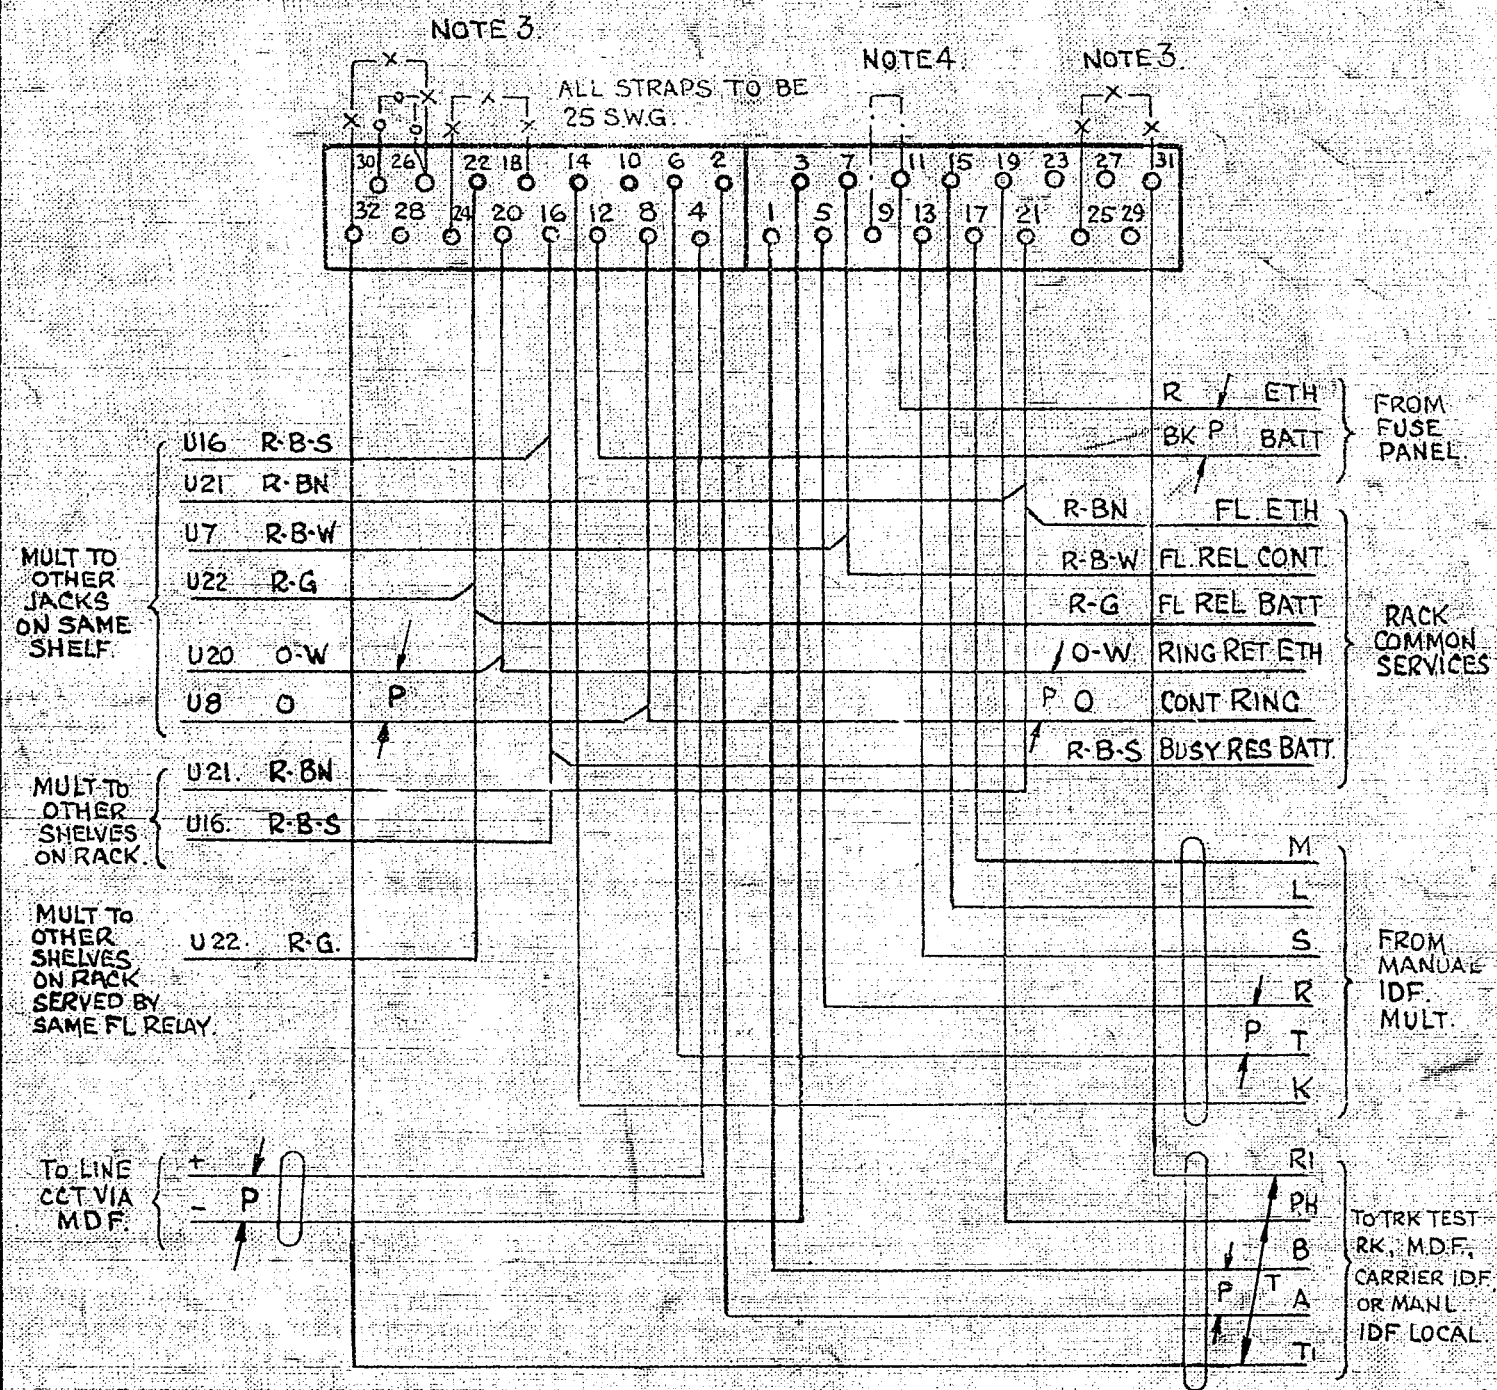

- NOTES:
1. SHELF JACK U POINTS 9 & 11, 14 & 16, MAKE CONTACT WHEN RELAY SET IS REMOVED
 2. ALL WIRING TO BE 22 SWG UNLESS OTHERWISE SPECIFIED.
 3. WHEN THIS CIRCUIT IS USED ON NON-SUPERPOSED LINES OR AS A PHANTOM CIRCUIT ON SUPERPOSED LINES DISCONNECT STRAP U26-30 SHOWN AND CONNECT STRAPS U18-24, U25-31 & U26-32 SHOWN WHEN THIS CIRCUIT IS USED ON SUPERPOSED LINES AS SIDE CIRCUIT DISCONNECT STRAPS SHOWN & CONNECT STRAP SHOWN
 4. WHEN THIS CIRCUIT IS ASSOCIATED WITH AN UNDER 3db UNREPEATERED LINE STRAP U9 & U11 SHOWN

				SCS	
				BOTHWAY TRUNK GENERATOR	
				SIGNALLING AND DC DIALLING	
				PAD CONTROL 2000 TYPE	
AMENDMENT PARTICULARS		ISSUE DATE	Appo	REF G53-21-3-4-5	
N.Z.P.O.		DRAWN RPZ	CHECKD.	WIRING FILE	CIRCUIT KEW
				GBU 13030	
				50V W	

0
5 Centimetres
10
15
20
25
30