


AS SEEN FROM REAR

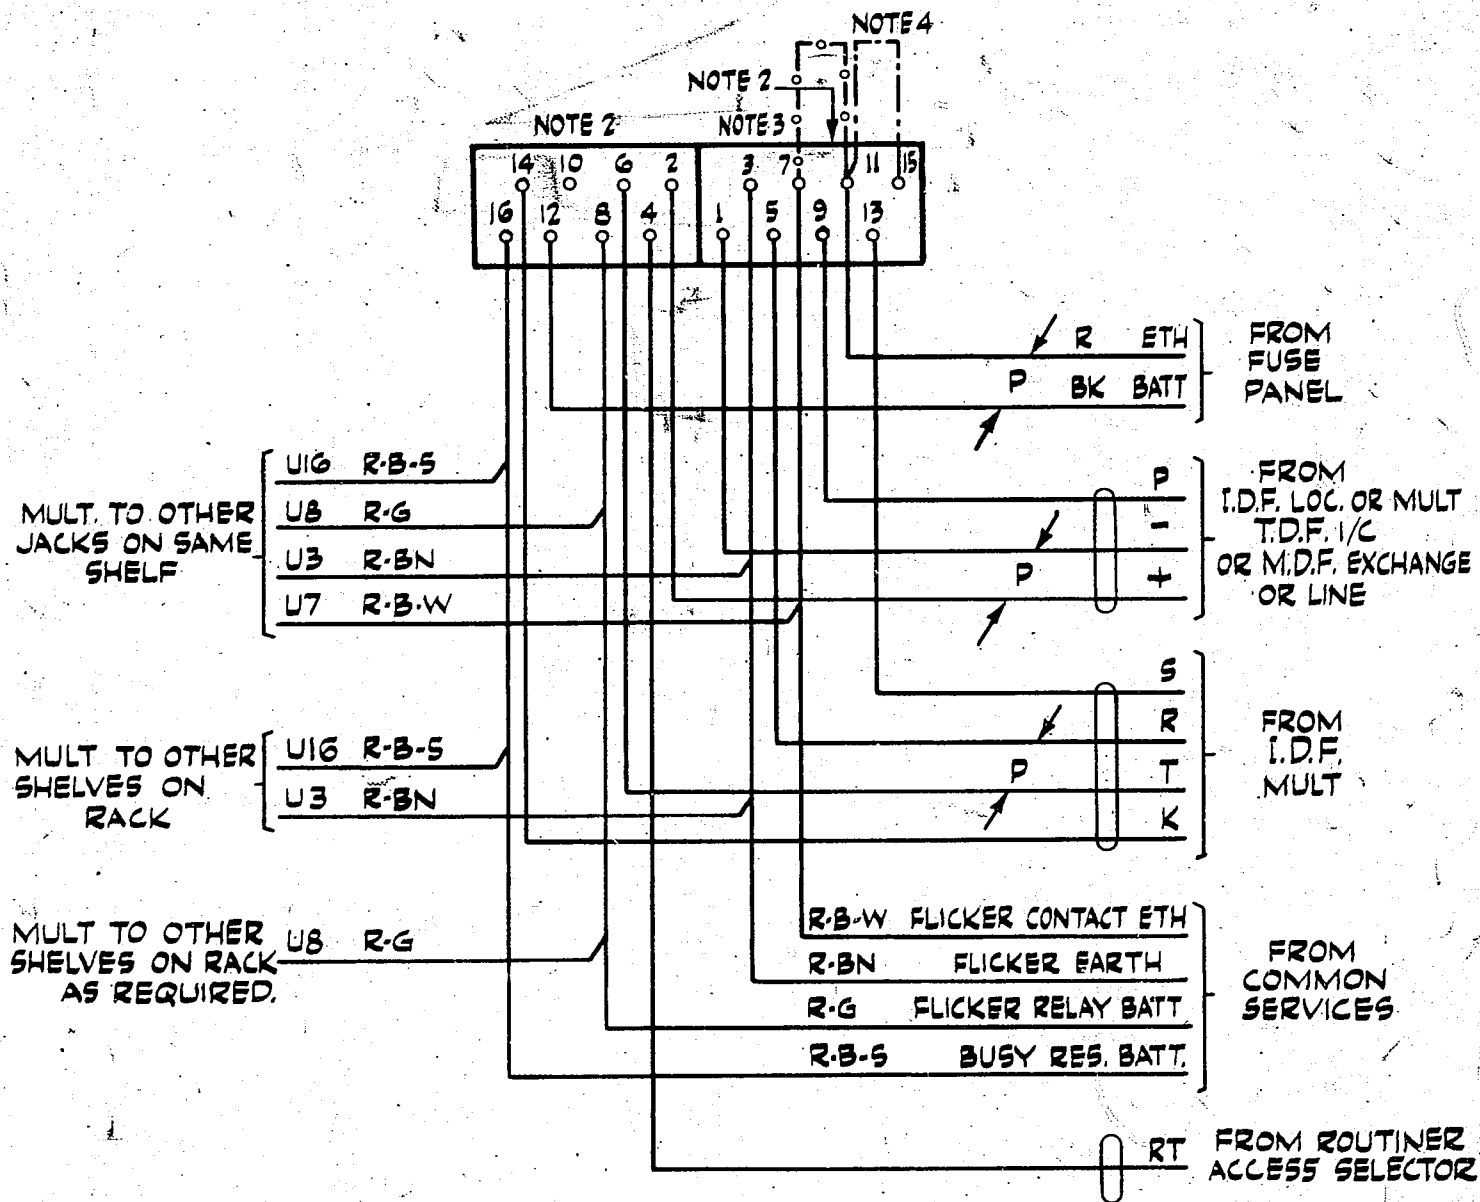

NOTES:-

1. ALL WIRING TO BE 20 SW.G. UNLESS OTHERWISE SPECIFIED.
2. JACK POINTS U9 & U11, U14 & U16 MAKE CONTACT WHEN RELAY SET IS REMOVED.
3. WHEN FLICKE SUPERVISORY IF NOT REQUIRED LEAD TO U7 IS DISCONNECTED & INSULATED. U7 IS THEN CONNECTED TO U11 ON SHELF JACK.
4. U15 TO BE STRAPPED TO U11 FOR UNDER 3db UNREPEATERED TRUNKS.

				OUTGOING RELAY SET TO AUTO EXCHANGE LOOP DIALLING. SLEEVE CONTROL SYSTEM 2000 TYPE	
GBU 13071 ADDED TO TITLE BOX (47407)		2	11-3-65	REV	
AMENDMENT PARTICULARS		ISSUE	DATE	APP'D	REV
N.Z.P.O.		DRAWN G.S.	CHECKED E.D. 9/10	WIRING E/D	CIRCUIT
				GBU 13070 13071	

Centimetres 5 10 15 20 25 30