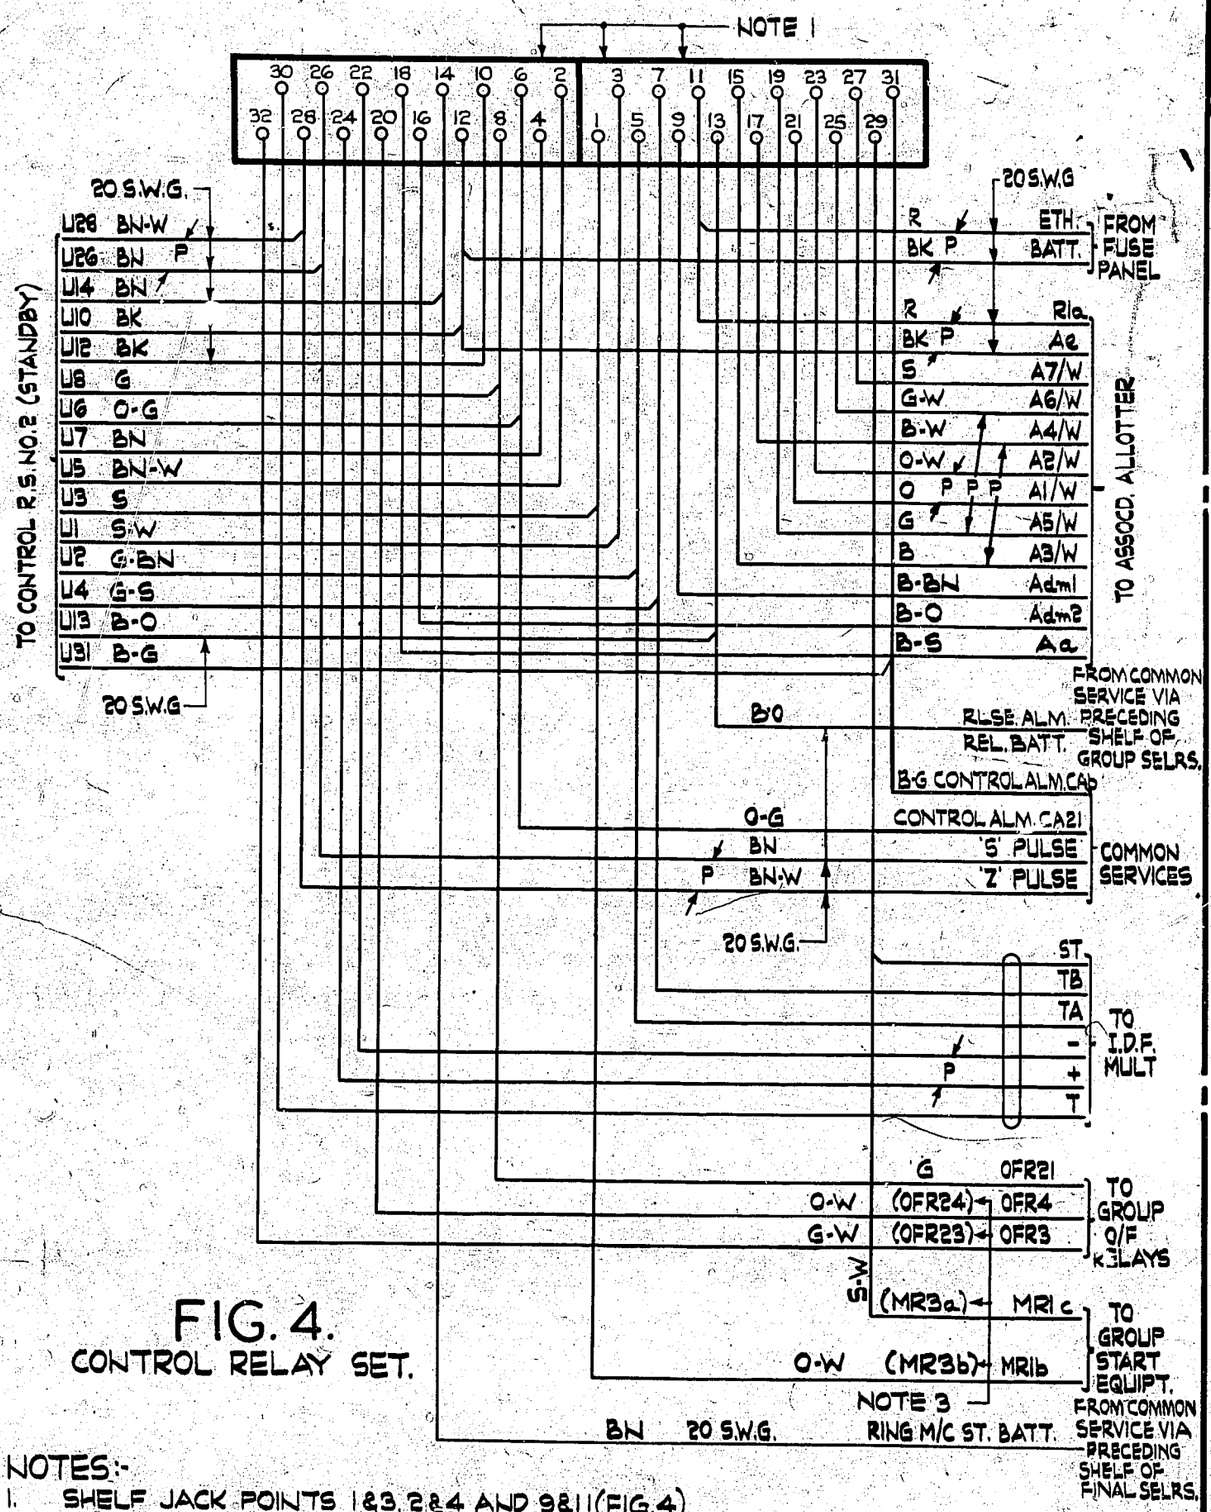

FIG. 4.
CONTROL RELAY SET.

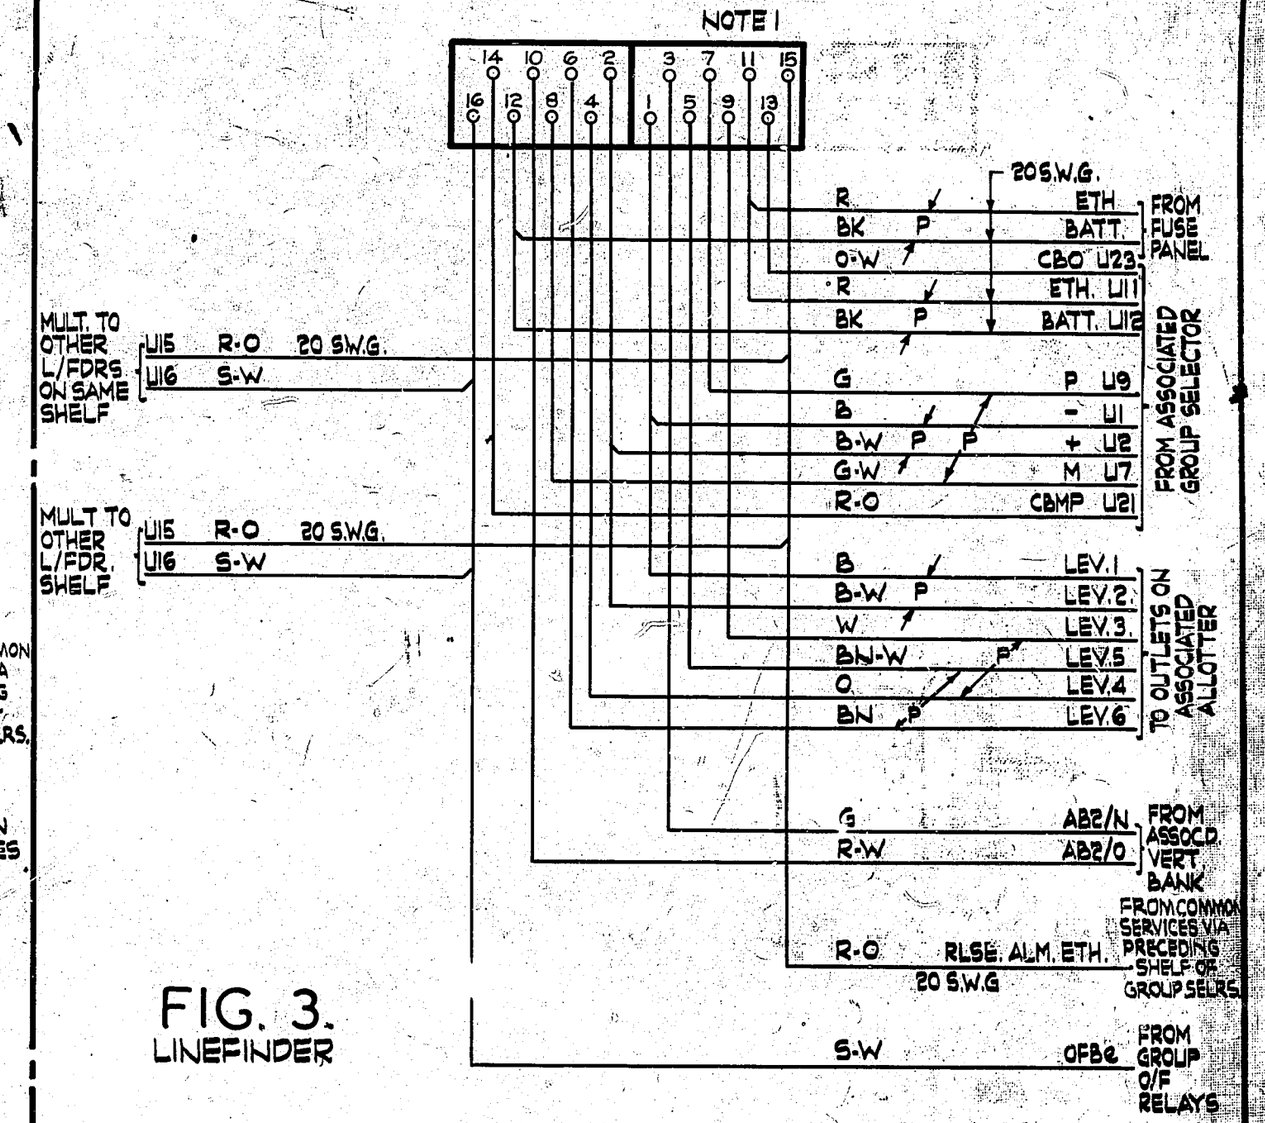

FIG. 3.
LINEFINDER

NOTES:-

1. SHELF JACK POINTS 1&3, 2&4 AND 9&11 (FIG.4) AND 9&11 (FIG.3) TO MAKE CONTACT WHEN RELAY SET OR SELECTOR IS REMOVED.
2. ALL WIRING TO BE 25 S.W.G. UNLESS OTHERWISE SPECIFIED.
3. CROSS REFERENCES IN BRACKETS APPLY TO CONTROL RELAY SET NO.2 (STANDBY)

AMENDMENT PARTICULARS	ISSUE	DATE	APP'D
NOTE 2. 25 S.W.G. WAS 23 S.W.G (67401)	3	18-6-56	CWH
FIG.4. CONTROL ALM. CAb WAS NOT SHN.	2		
	1		

U.A.X. No. NZ.13
LINE FINDER
AND
LINE CIRCUIT

REF. - 50V

N.Z.P.O. | DRAWN R.L. | CHECKED | WIRING | CIRCUIT

GBU 13910