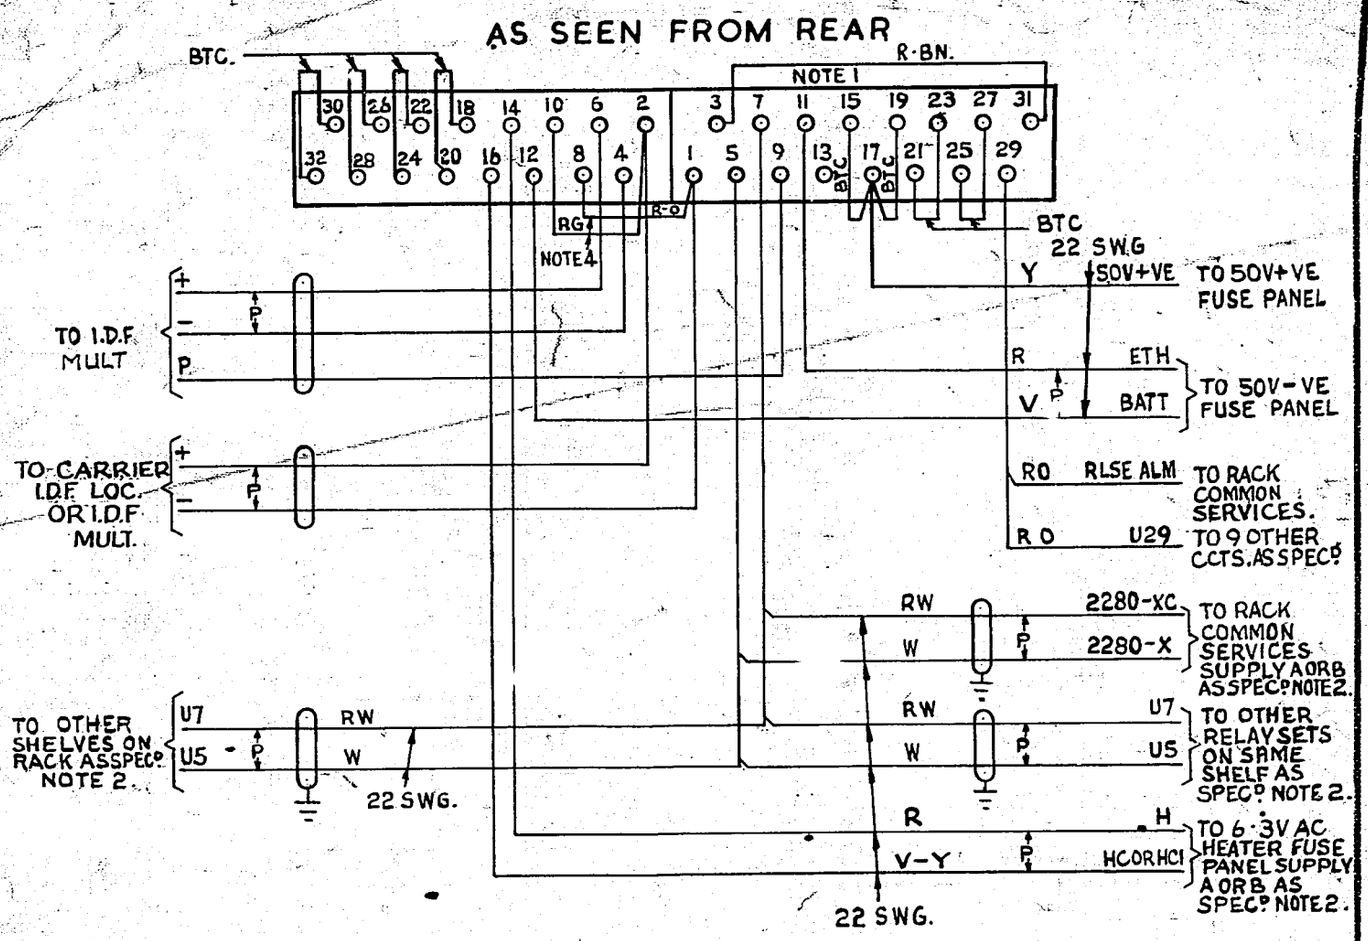

NOTES.

1. SHELF JACK U POINTS U9 & U11 MAKE CONTACT WHEN RELAY SET IS REMOVED
2. THE FOLLOWING RELAY SET POSITIONS ARE SERVED BY SUPPLY A.
   SHELVES A & C POSITIONS 1, 3, 5, 7 & 9.
   " B & D POSITIONS 2, 4, 6, 8 & 10.
   THE FOLLOWING RELAY SET POSITIONS ARE SERVED BY SUPPLY B.
   SHELVES A & C POSITIONS 2, 4, 6, 8, & 10.
   " B & D POSITIONS 1, 3, 5, 7 & 9.
3. ALL WIRING NOT OTHERWISE SPECIFIED TO BE 25 S.W.G.
4. STRAPS INDICATED BY NOTE 4 TO BE EQUIPPED ON LINES OF 5db OR LESS.
5. THE SHEATHING OF ALL SCREENED WIRES TO BE MADE ELECTRICALLY CONTINUOUS BY BONDING.
6. ON SOME EARLIER EQUIPMENT COLOUR OF NEG. BATT. WIRING WAS BK. AND POS. BATT. WIRING WAS R-B. 6·3V. A.C. WIRING WAS BN & BN-W PAIR.

AMENDMENT PARTICULARS	ISSUE	DATE	APP.
(215407)			
REF. TO CARRIER IDF LOC. & NOTE 6 ADDED TITLE CHANGED	4	20·4·70	RW
GBU 15101 ADDED TO TITLE (91445)	3	4·12·64	[illegible]
P LEAD FROM U9 FOR T.J.F DELETED	2		
	1		

PARENT EXCHANGE O/G LINE CCT. FOR UNIDIRECTIONAL JUNCTIONS TO DEPENDENT EXCH.
N.Z.S.S.A.C. No 3

REF :- | -50V | S

GBU 15100 15101

N.Z.P.O.	DRAWN P.J.G.	CHECKED [illegible]	WIRING	CIRCUIT E.W.D.