



**FIG 1B
FIG 1C**
NOTE 4

FIG 1A
1 PER RACK

N.Z. NOTES
A. MAINS CONNECTION IS TO BE MADE TO ESSENTIAL SUPPLY WHERE THIS IS PROVIDED.

- NOTES:-**
1. FUSE - NEGATIVE BATT. 1.5A PER CIRCUIT.
 2. THE ALARM CONTACTS ON FUSES FS5, FS6, FS7, FS8, AND FS10 ARE NOT USED.
 3. Ø FOR WIRING OF RACK COMMON SERVICES FOR I.V.F. SYSTEM SEE 55W 12110 OR EQUIV.
 4. WHEN 6.3 VOLT HEATER LOAD DOES NOT EXCEED 10 AMPS PER FEED (i.e. 32 CIRCUITS PER 2 FEEDS) FIGS 1A & 1B ARE USED. WHEN 6.3 VOLT HEATER LOAD EXCEEDS 10 AMPS BUT DOES NOT EXCEED 20 AMPS PER FEED (i.e. 33-66 CIRCUITS PER 2 FEEDS) FIGS 1A & 1C ARE USED AND THE TWO TRANSFORMERS SUPPLIED FOR FIG 1C ARE CONNECTED IN PARALLEL.
 5. WHEN FIGS 1A & 1B ARE PROVIDED FUSES FS3, FS4, FS9, AND FS11 ARE 10 AMPS. WHEN FIGS 1A & 1C ARE PROVIDED FUSES FS3, FS4, FS9 AND FS11 ARE 20 AMPS.
 6. WIRING BEARING A COLOUR CODE TO BE 22 S.W.G. UNLESS OTHERWISE SPECIFIED. LOCAL PLATE WIRING TO BE 25 S.W.G.

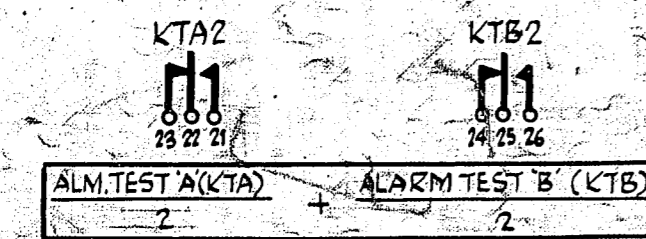

RECORD ONLY NOT TO BE USED FOR NEW WORK

6.3 VOLT A.C. HEATER SUPPLY (C CORE TRANSFORMER) WITH AC/DC CHANGEOVER FACILITY I.V.F. SYSTEM.			
N.Z. NOTE A ADDED	(66990)	TA	3-3-67 2013
	(65899)		19-6-64 0013
AMENDMENT PARTICULARS	ISSUE	DATE	APP. REF.
N.Z.P.O.	DRAWN	CHECKED	WIRING CIRCUIT
	Z	GS 28/1/64	GS

GBW 16620