


AS SEEN FROM REAR

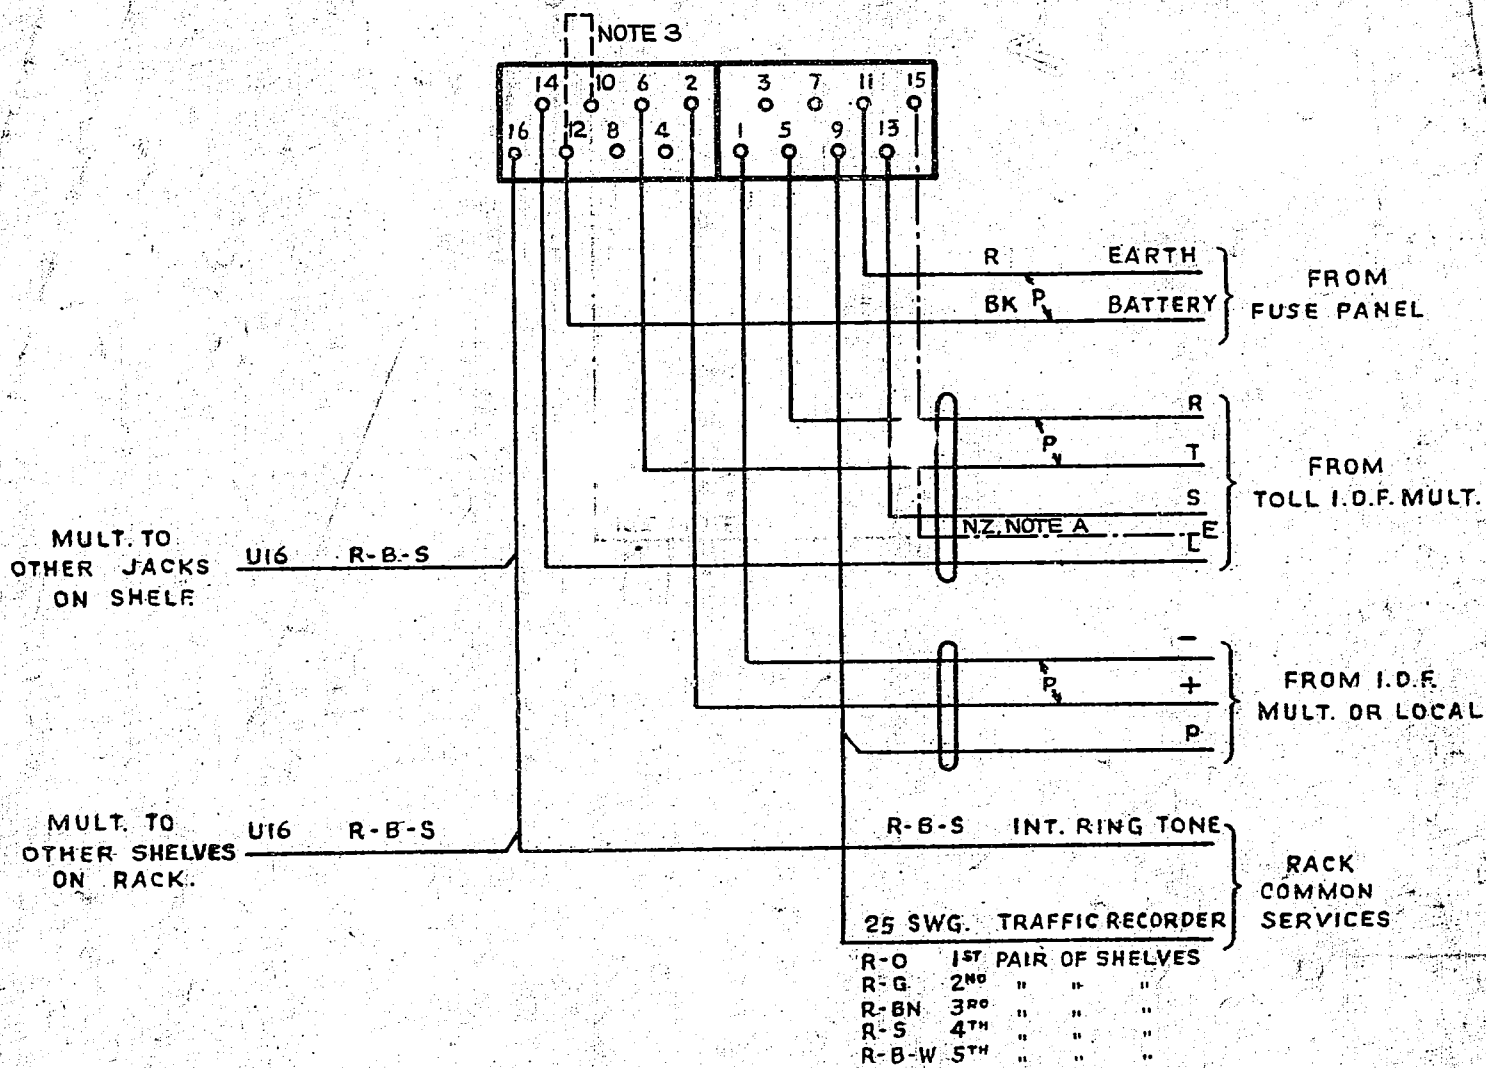

NOTES

1. SHELF JACK U POINTS 9 AND 11 TO MAKE CONTACT WHEN RELAY SET IS REMOVED.
2. UNLESS OTHERWISE SPECIFIED ALL WIRING TO BE 22 SWG.
3. WHEN PRECEDING SELECTOR IS BATTERY TESTING STRAP SHELF JACK U-POINTS 10-12 WHEN PRECEDING SELECTOR TESTS FOR ABSENCE OF EARTH OMIT THIS STRAP.

N.Z. NOTES

A. AT PM USE CONNECTIONS SHOWN -----

				VF SELECTOR LEVEL 0 RELAY SET.	
				W.E. BRIDGE CONTROL TOLLBOARD	
NOTE 3 & STRAP U10-12 ADDED (63417)	3A	22.6.62	<i>[Signature]</i>	50V	E
N.Z. NOTE A ADDED. (42789)	2A	24.7.61	<i>[Signature]</i>		
IN TITLE V.F. WAS 2 V.F. (33830)	2	19.8.59	<i>[Signature]</i>		
(77704)	1	1.8.58	<i>[Signature]</i>		
AMENDMENT PARTICULARS	ISSUE	DATE	APPD		
				<b>GBU 15280</b>	
N.Z.P.O.	DRAWN	CHECKED	WIRING	CIRCUIT	