


0
5 Centimetres
10
15
20
25
30

AS SEEN FROM REAR.

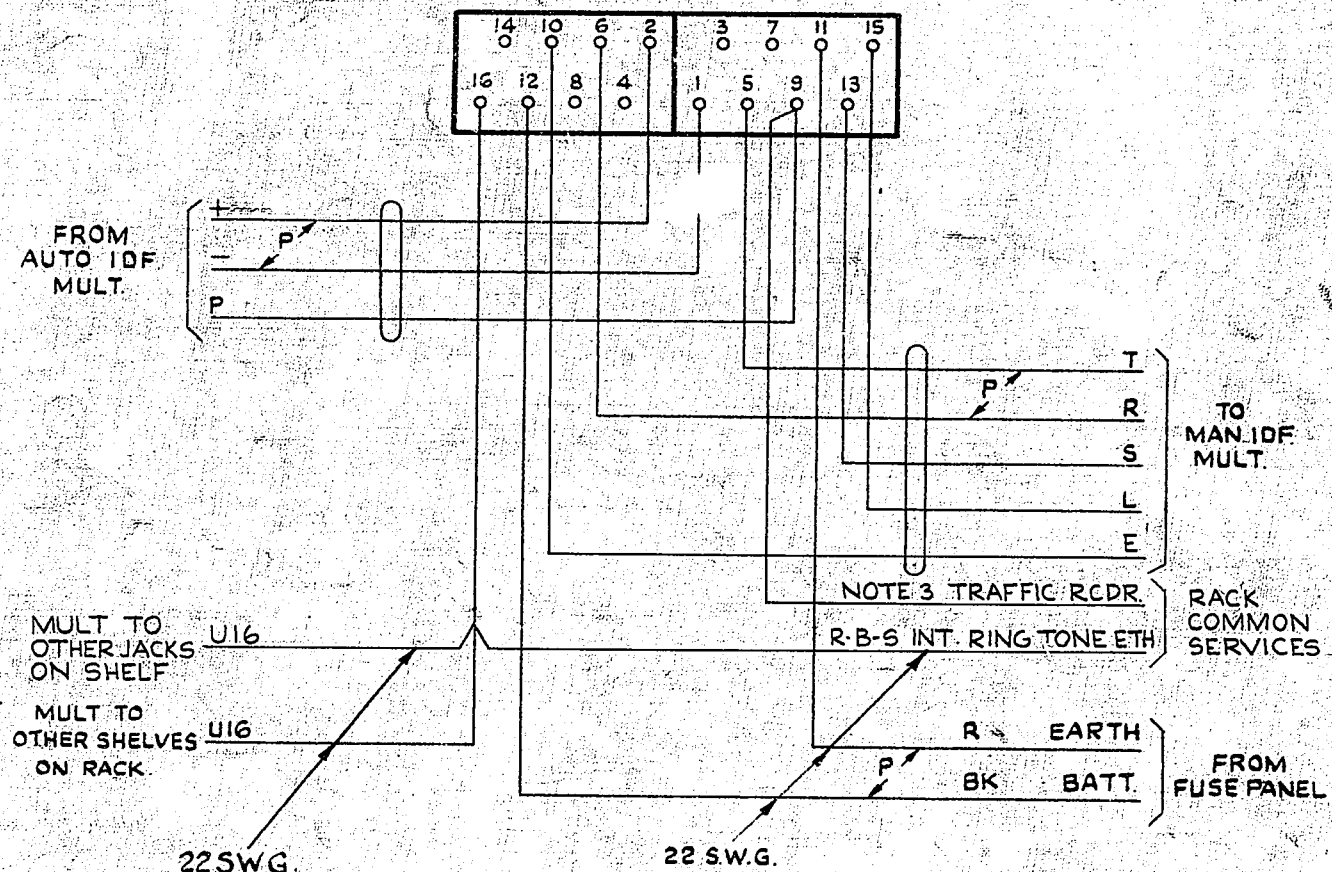

- NOTES:
1. ALL WIRING TO BE 25 SW.G. UNLESS OTHERWISE SPECIFIED.
 2. JACK POINTS 9 & 11 TO MAKE CONTACT WHEN RELAY SET IS REMOVED.
 3. COLOURS FOR THIS LEAD TO BE AS FOLLOWS:-
 R-O (SH. 1 & 2) R-G (SH. 3 & 4) R-BN (SH. 5 & 6) R-S (SH. 7 & 8) R-B-W (SH. 9 & 10)
 R-BK (SH. 11 & 12)

					SELECTOR LEVEL RELAY SET. EMERGENCY SERVICE. I/C FROM UAX N.Z. 13 OR AMX W.E. TOLL BOARD (BRIDGE CONTROL)	
WIRING TO UP & 10 ADDED.	(83524)	2A	11.7.57	QIB.		
SHELVES 11 & 12 ADDED TO NOTE 3	(47681)	2	3.12.65	SL		
	(29154)	1	16.5.60	OK		
AMENDMENT PARTICULARS	ISSUE	DATE	APPO	50V. W		
NZ.P.O.	DRAWN ASL	CHECKED M	WIRING	CIRCUIT	GBU 15600	