


NOTE 3 AS SEEN FROM REAR

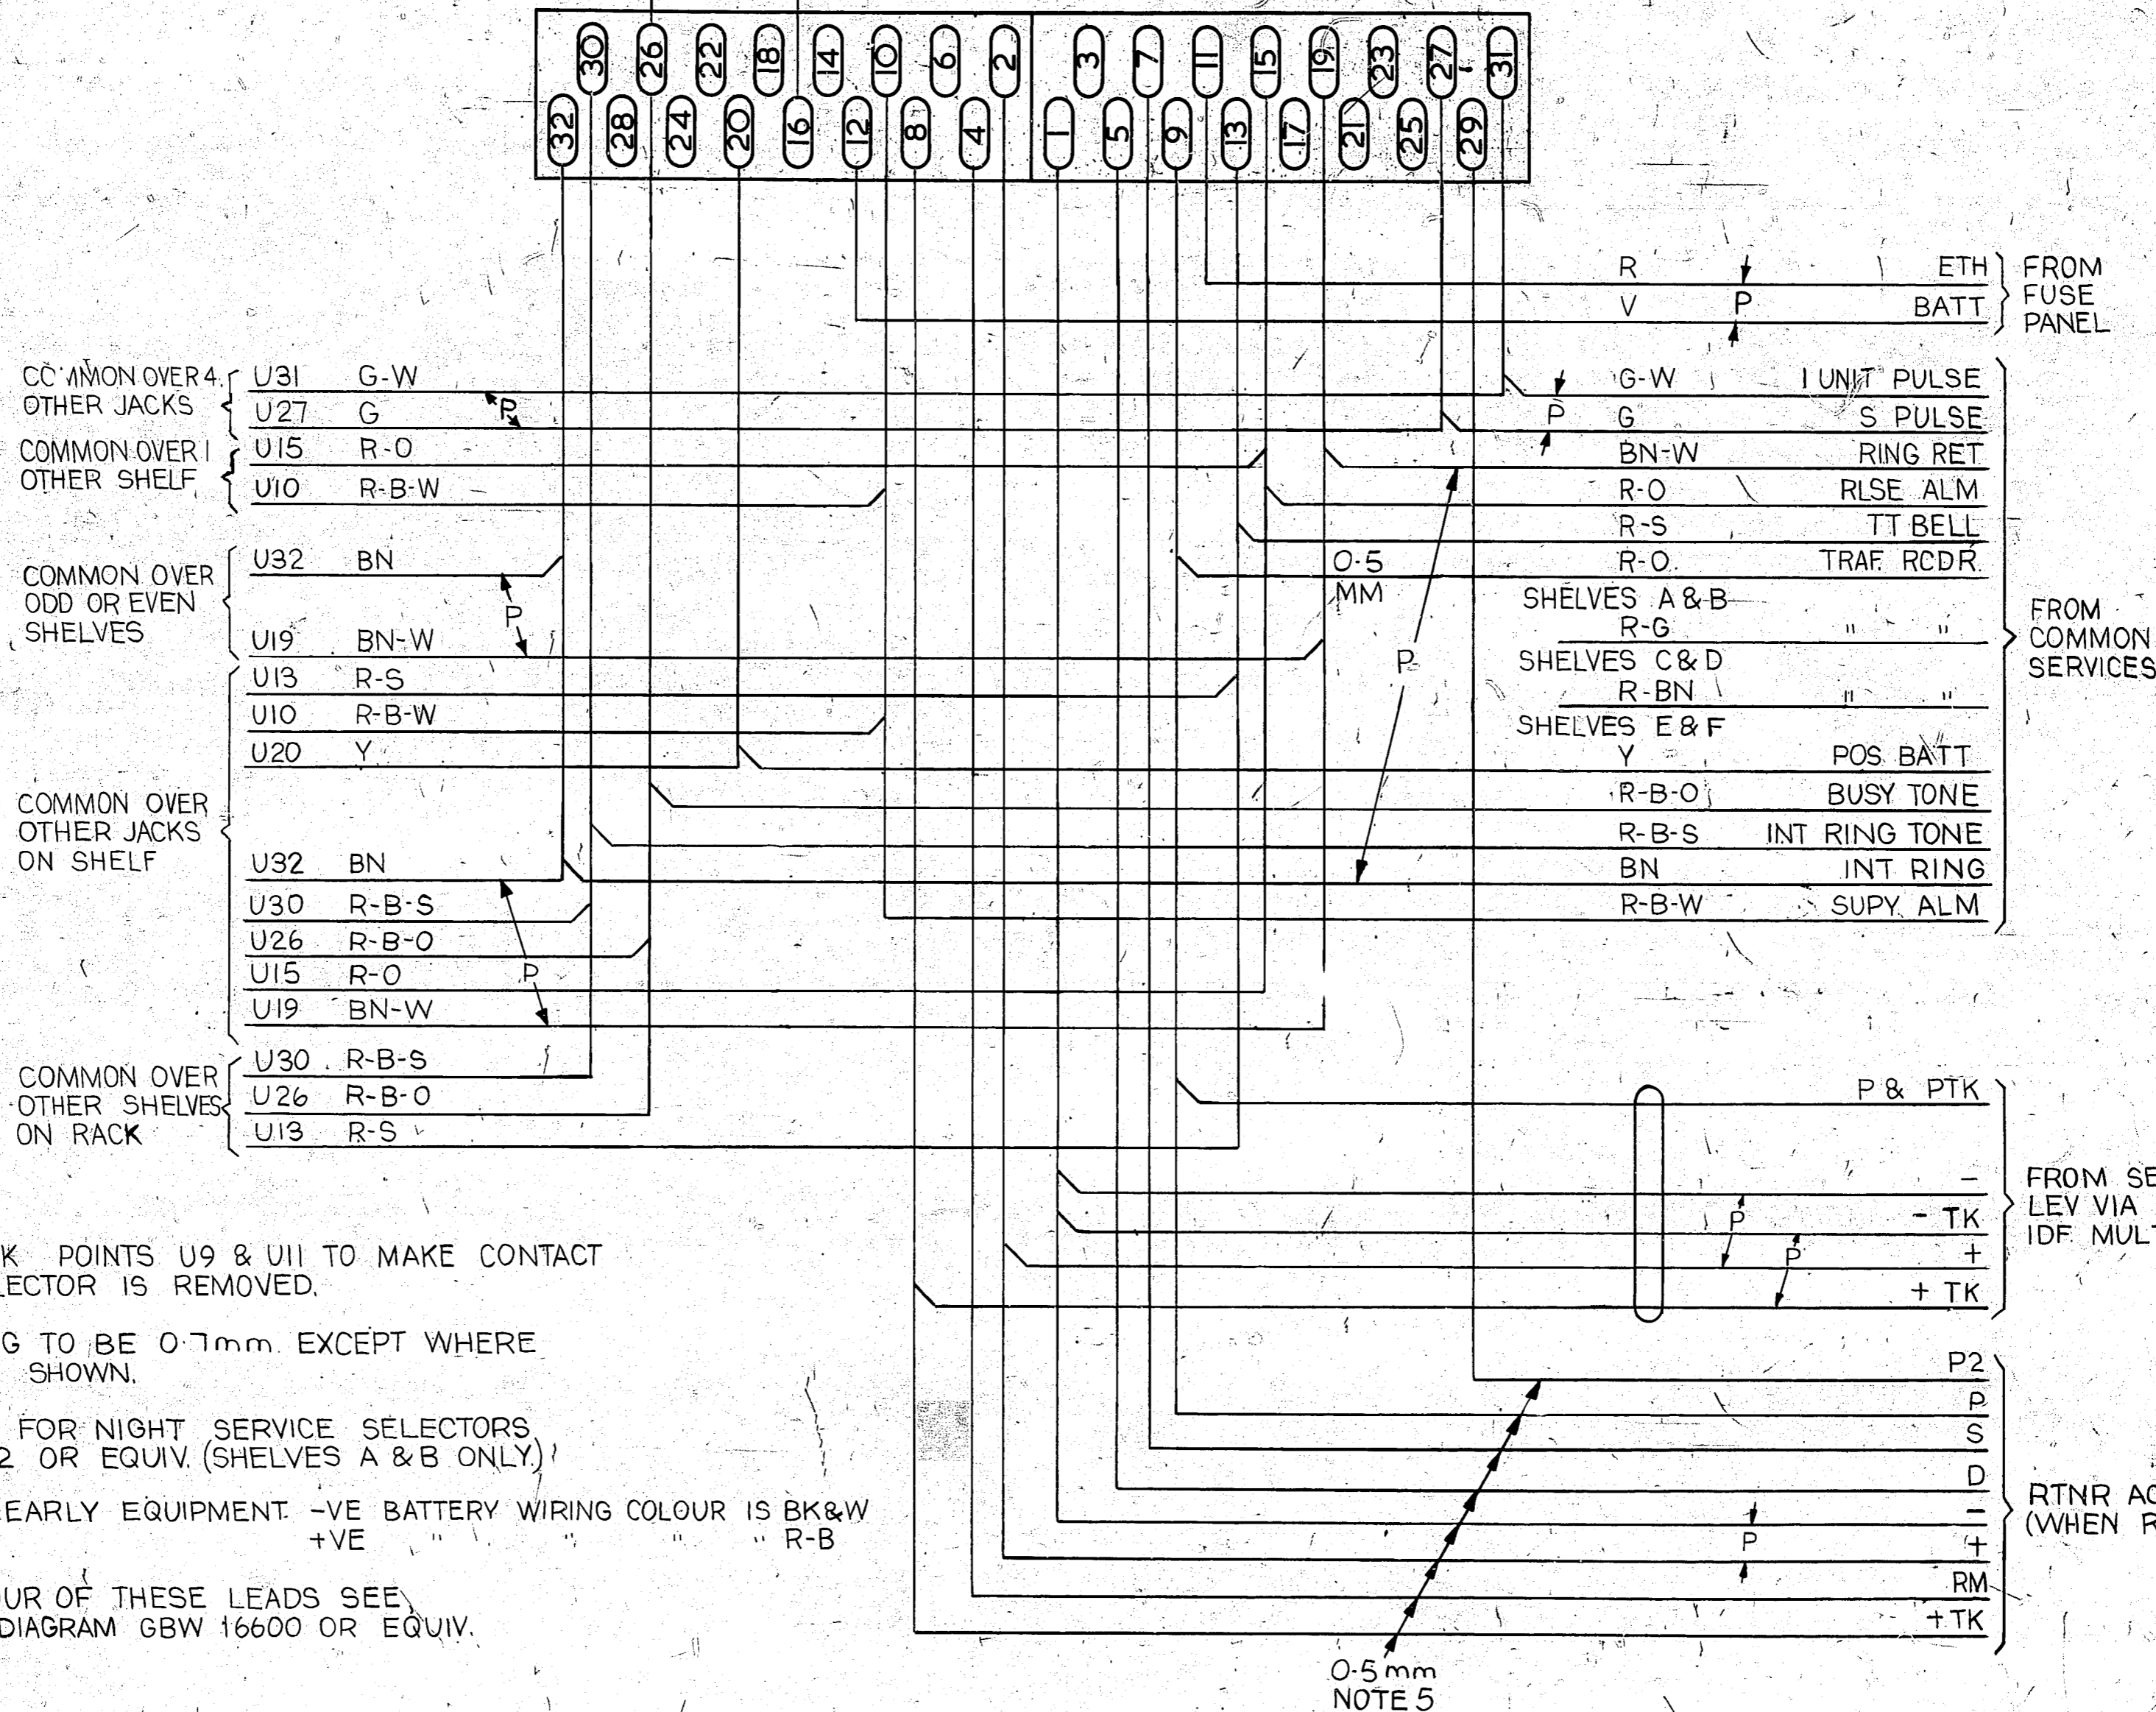

NOTES:-

- 1 SHELF JACK POINTS U9 & U11 TO MAKE CONTACT WHEN SELECTOR IS REMOVED.
- 2 ALL WIRING TO BE 0.7mm. EXCEPT WHERE OTHERWISE SHOWN.
- 3 REQUIRED FOR NIGHT SERVICE SELECTORS GBW 10782 OR EQUIV. (SHELVES A & B ONLY)
- 4 ON SOME EARLY EQUIPMENT -VE BATTERY WIRING COLOUR IS BK&W
+VE " " " " R-B
- 5 FOR COLOUR OF THESE LEADS SEE RTR. ACC. DIAGRAM GBW 16600 OR EQUIV.

Centimetres
5
10
15
20
25
30

DRN CP	WRG.S.B.N
A2 CKD	CCT
A3	GPO CERTIFICATION

NOTES ADDED MINOR MODIFICATIONS, RETRACED (2185)	6	19-10-72	B.S.H.
RTR. ACC POINTS, U5 & U7 ADDED & U28 DELETED	5		
WIRE SIZES WERE SWG RTNR ACC POINT U4 ADDED	4		
U16 WAS TO B/T EARTH DIRECT, U26 WAS O/F BUSY TONE	3		
NOTE 4 ADDED	2		
AMENDMENT	1		

200 LINE FINAL SELR WITH TOLL ACCESS		REFERENCES	50V/W
11-20PBX W/- GRAD. FACILITY FOR LARGER GROUPS			
2000 TYPE			
NZPO		SIZE M	GBU 15910