


0
5 Centimetres
10
15
20
25
30

AS SEEN FROM REAR

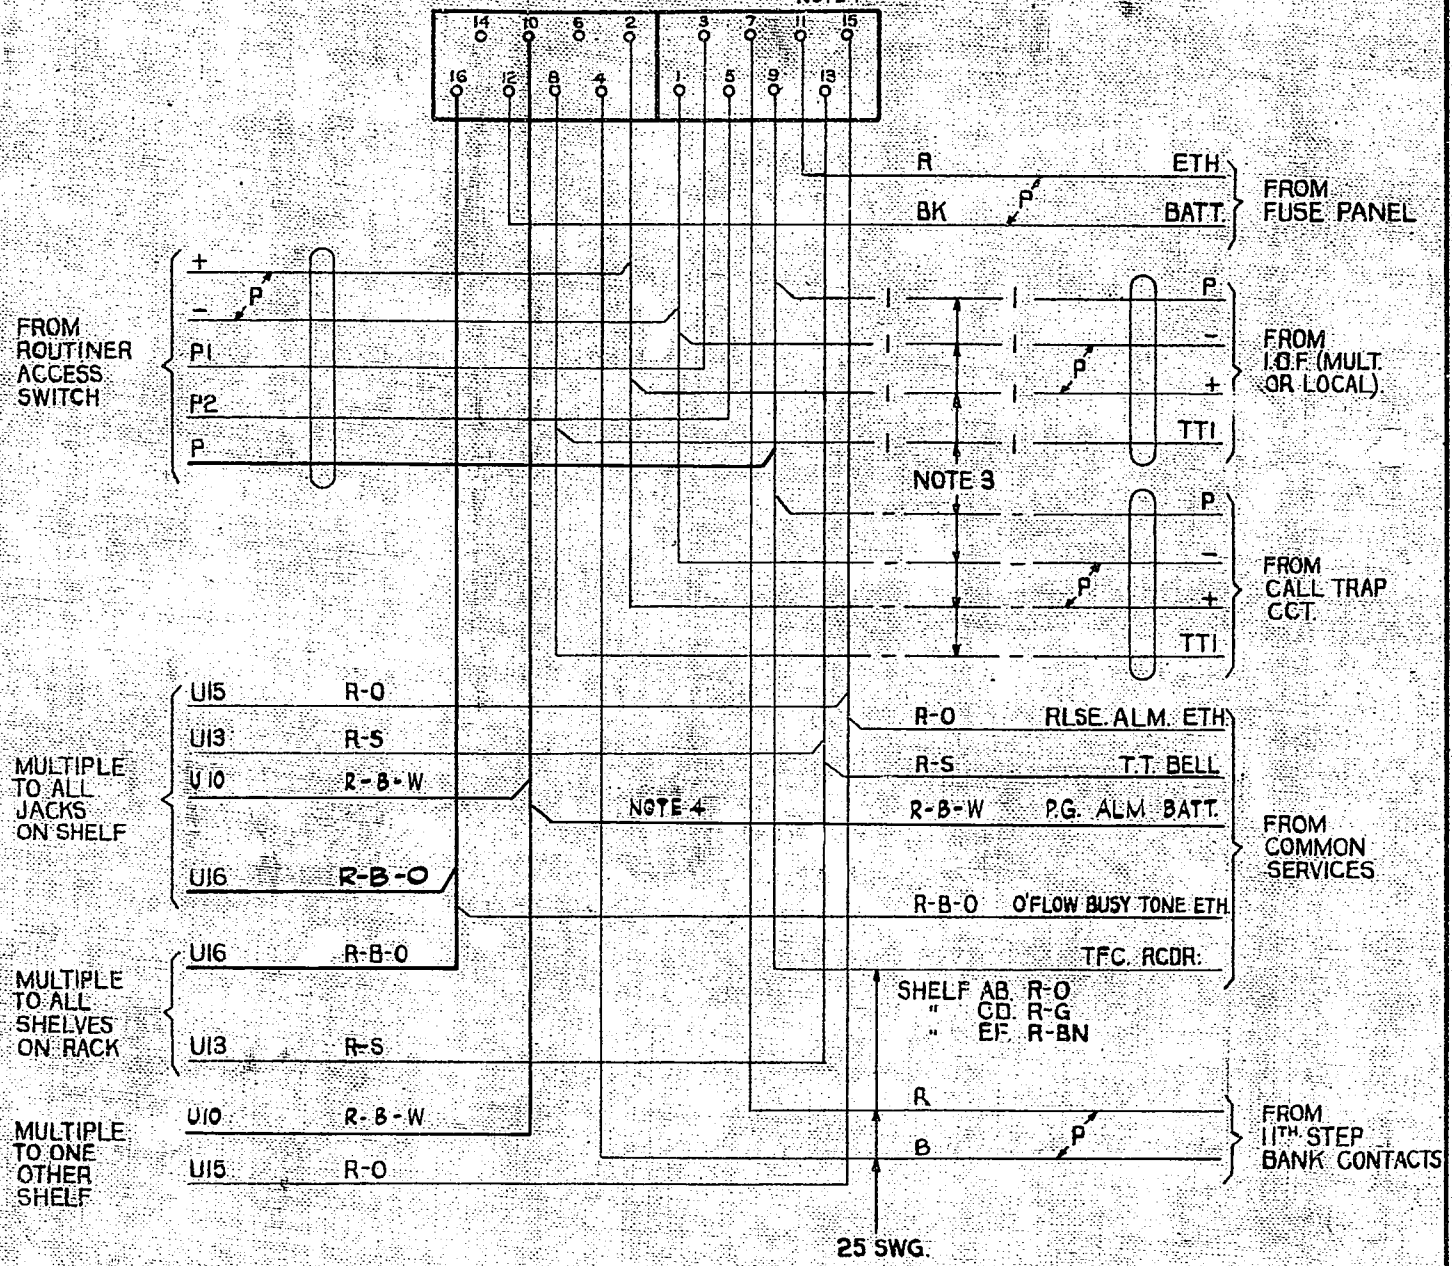

NOTES -

1. SHELF JACK POINTS U9 & U11 TO MAKE CONTACT WHEN SELECTOR IS REMOVED.
2. WHEN DIRECTLY CONNECTED TO CALL TRAP CIRCUIT USE CONNEXIONS SHOWN THUS AND OMIT CONNEXIONS SHOWN THUS .
3. ALL WIRING TO BE 22 SWG EXCEPT WHERE OTHERWISE SHOWN.
4. P.G. ALARM BATT TO BE PROVIDED ON INCOMING & FIRST SELECTORS ONLY.

				TRUNK TANDEM SELECTOR	
				200 OUTLET, 4 WIRE	
				2000 TYPE	
P.G. ALARM LEAD REINSTATED & NOTE 4 ADDED (74465)		3	30.7.63	DRH	
P.G. ALARM LEADS DELETED (63676)		2	10.8.62		
		1	12.10.61		
AMENDMENT PARTICULARS		ISSUE	DATE	APP ^d	50V W.
NZPO	DRAWN D.C.	CHECK ^d	WIRING	CIRCUIT	GBU 15980