


AS SEEN FROM REAR

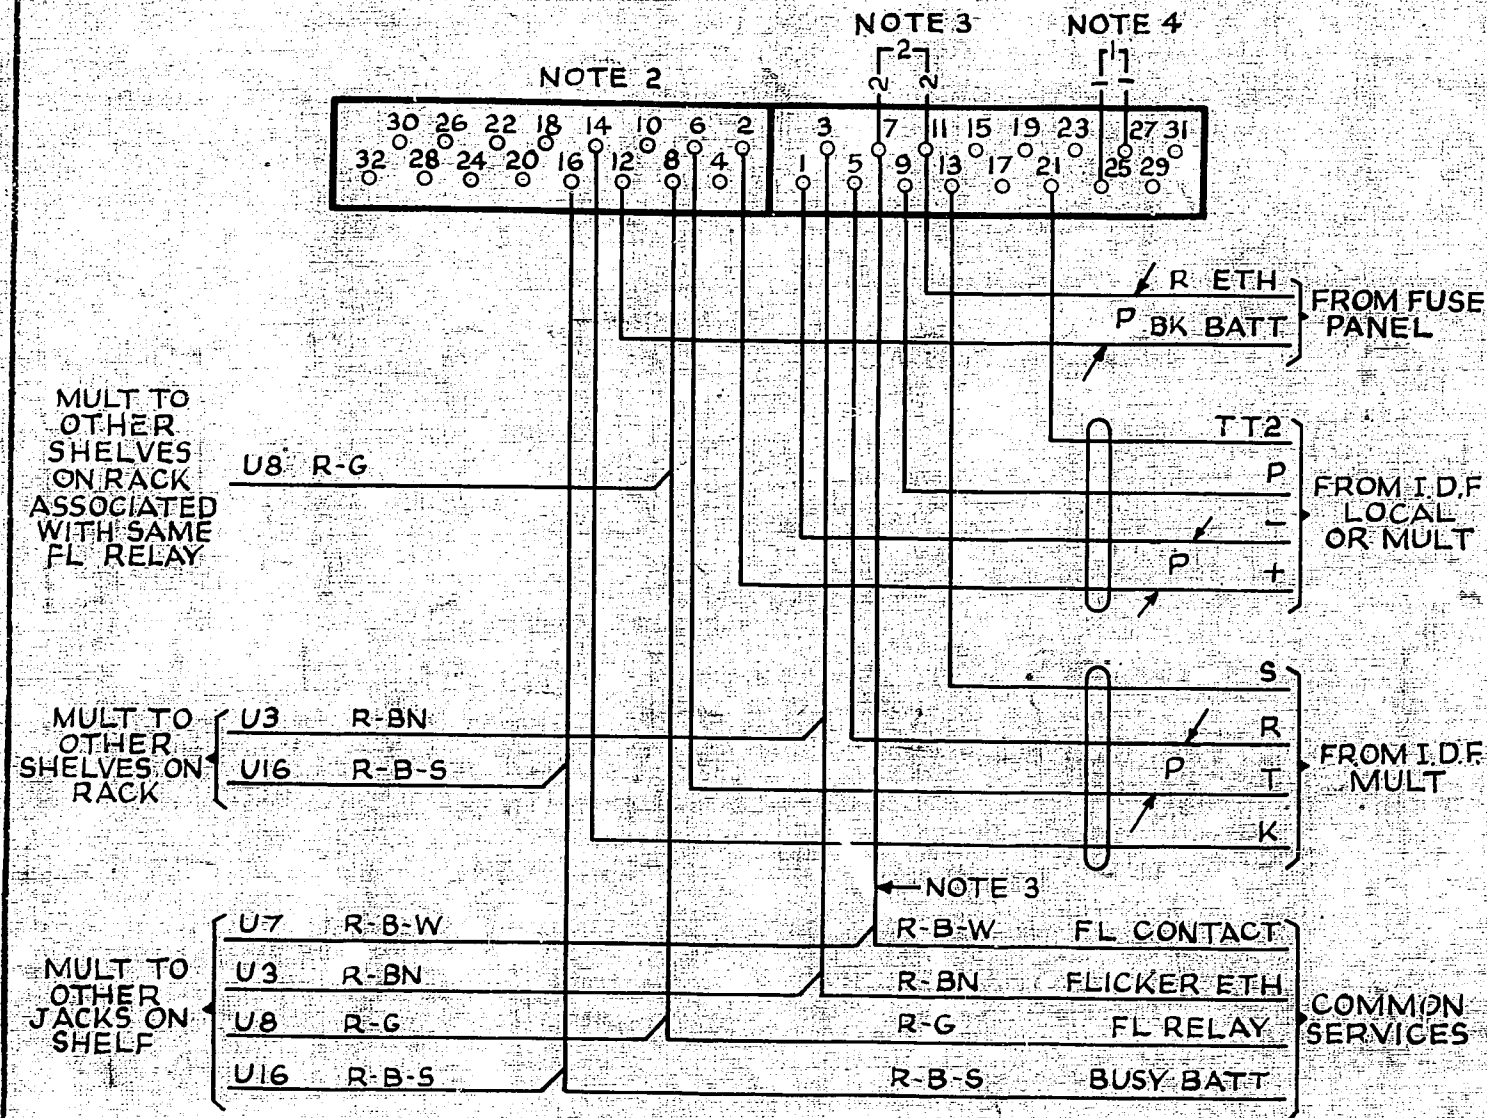

NOTES:~

1. ALL WIRING TO BE 22 S.W.G. UNLESS OTHERWISE SPECIFIED.
2. SHELF JACK U POINTS 14 & 16 TO MAKE CONTACT WHEN RELAY SET IS REMOVED.
3. WHEN FLICKER SIGNAL IS NOT USED STRAP U7 & U11 SHOWN THUS — 2 —.
4. WHEN DISTANT END OF CIRCUIT TERMINATES ON A MANUAL BOARD STRAP U25 & U27 SHOWN THUS — 1 —.

O/G JUNCTION FROM SLEEVE CONTROL SWITCHBOARD LOOP DIALLING WITH B/W REPETITION OF PAD CONTROL SIGNALS IVF

					50Y		H	
AMENDMENT PARTICULARS					ISSUE	DATE	APPD	
N.Z.P.O.					DRAWN	CHECKED	WIRING	CIRCUIT
					G.S.	J.M.S.	GBU 15990	

Centimetres

5

10

15

20

25

30