


AS SEEN FROM REAR

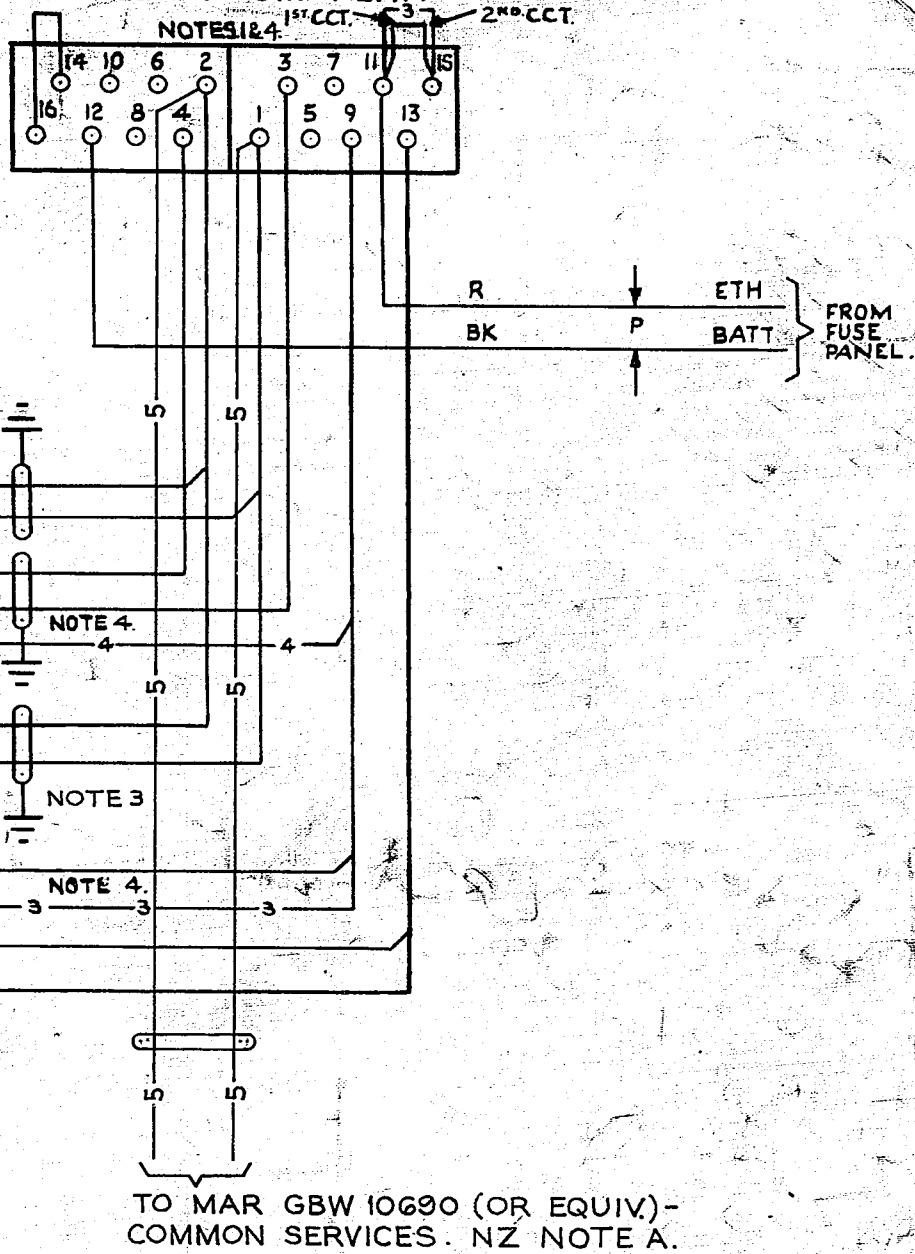

TO 'U' POINTS INDICATED OF 2280 OSC ON RACK.

TO RACK COMMON SERVICES.

TO MAR GBW 10690 (OR EQUIV.) - COMMON SERVICES. NZ NOTE A.

NOTES

1. SHELF JACK U POINTS 1 & 3, 2 & 4, 9 & 11 TO MAKE CONTACT WHEN RELAY SET IS REMOVED.
2. ALL WIRING NOT OTHERWISE SPECIFIED TO BE 22 SWG.
3. SCREENED LEADS TO BE BONDED TOGETHER TO FORM AN ELECTRICALLY CONTINUOUS SCREEN AND CONNECTED TO EARTH BAR WITH 22 SWG. RED.
4. WHEN USED WITH GBW 12110 PROVIDE CONNECTIONS SHOWN 3 3 WHEN USED WITH GBW 13730 PROVIDE CONNECTIONS SHOWN 4 4
5. WHEN USED WITH GBW 12110 WIRE COLOUR R-B-O WHEN USED WITH GBW 13730 WIRE COLOUR R-BN.

NZ NOTES

- A. WHEN GBW 10820 OR EQUIVALENT IS MOUNTED ON GBW 10690 OR EQUIVALENT PROVIDE CONNECTIONS 5 5

				2280 C/S OSCILLATOR	
				N.Z.S.S.A.C. Nos 2T & 3T	
NZ NOTE A ADDED		(1446/9)	2A	4-876	CJW
NOTES 4 & 5 ADDED		(53394)	2	22-766	<i>[Signature]</i>
AMENDMENT PARTICULARS			ISSUE	DATE	APP.
			REF: IVF		50V/S
N.Z.P.O.			DRAWN: CTS		CHECKED: WIRING CIRCUIT
GBU 16480					

5 Centimetres

10

15

20

25

30