AS SEEN FROM REAR.

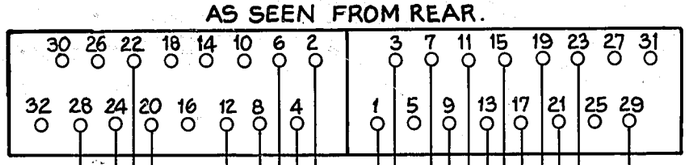

NOTE 1.

0.7mm (22SWG)

TO LINE FINDER
- ETH R
- BATT BK P

FUSE PANEL
- R ETH
- P BR BATT

COMMON SERVICES
- U3 B. BN — R-BN RING START
- U20 R.B.W — R.B.W. FLICK ETH

MULTIPLED TO OTHER JACKS ON SAME POSITION

TO MISC CCT
- U29 R.B.G. — R.B.G. S
- U23 B.BN.W — B.BN.W OUT-
- U24 B.BN P — P B.BN OUT+
- U9 R.B.G — R.B.G. DP

TO MARKER CCT
- U70 R.B.S. — R.B.S Z

TO LINEFINDER
- R.B.W J
- B.W. —
- P B +
- R.B.O M
- R.B H
- R.BK DM

TO U13 OF NEXT CCT IN GROUP

TO U17 OF NEXT CCT IN GROUP

TO REQD FACILITY
- B —
- P R +
- R.O HH
- R.G CS
- R.BN AS
- R.S G

IN — FROM ACCESS START RELAY CONTACT (PROVIDED BY NZPO) OR U19 OF PRECEDING CCT.

R-O IN — FROM BANK MULT STRIP CONN

IN — FROM U15

TO ATTENDANTS CABINET
- SK
- LW
- EB

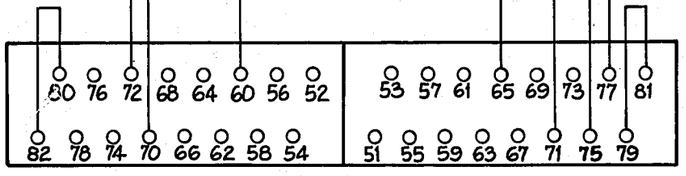

NOTE 1.

NOTES:

1 U POINTS 13-15,17-19,75-77,76-78,79-81& 80-82 MAKE CONTACT WHEN RELAY SET IS REMOVED.

2 ALL WIRING TO BE 0.5mm (25SWG) UNLESS OTHERWISE SHOWN.

ISS	DATE	DEL	DC	ORDER	CKD	APD	CHANGE
A	30-7-80	DTM	TG	63124	CA	J.H	

FINDER CIRCUIT 120,135 & 149 TYPE PABX

DRN DTM	CKD C.A	ORIGIN T-EQPT
TCD DTM	APPD J.H	STANDARD ATW22001
NZPO ENGINEER-IN-CHIEF, WELLINGTON		
	SHT 1 OF 1	GBU16850 MOD A
	SIZE A3	

UD 235

0 5 10 15 20 25 30 35 40 Centimetres