


AS SEEN FROM REAR

NOTES 2 & 3

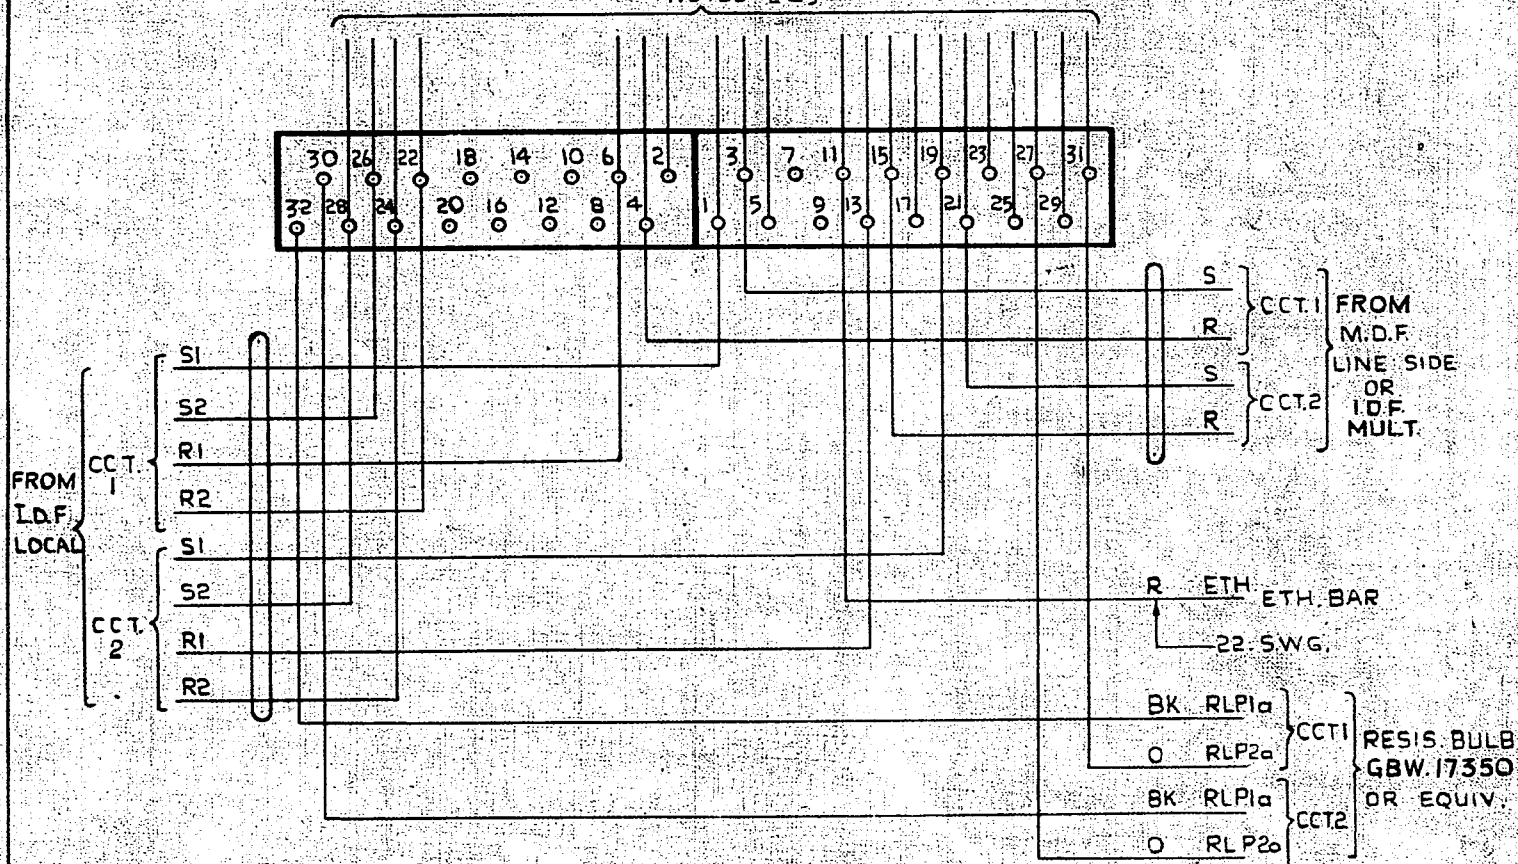

NOTES

1. WIRING TO BE 25 S.W.G. UNLESS OTHERWISE SPECIFIED.
2. RECEIVE WIRE RELAY CIRCUITS
  - (a) FOR 2 WIRE CIRCUITS. —
    - STRAP U1 (19) TO U3 (21)
    - .. U6 (13) TO U5 (23)
    - .. U2 (17) TO U4 (15)
    - .. U26 (28) TO U22 (24)
  - (b) FOR 4 WIRE CIRCUITS. —
    - STRAP U1 (19) TO U3 (21)
    - .. U6 (13) TO U5 (23)
    - .. U2 (17) TO U4 (15)
3. SEND WIRE RELAY CIRCUITS.
  - (a) WHOLLY PHYSICAL
    - STRAP U1 (19) TO U2 (17)
    - .. U5 (23) TO U3 (21)
    - .. U6 (13) TO U4 (15)
    - .. U29 (25) TO U11
    - .. U26 (28) TO U22 (24)
  - (b) PHYSICAL CONNECTED TO VF CHANNEL
    - STRAP U1 (19) TO U2 (17)
    - .. U5 (23) TO U3 (21)
    - .. U6 (13) TO U4 (15)
    - .. U29 (25) TO U31 (27)
    - .. U26 (28) TO U22 (24)

AUTOMATIC TELEX SYSTEM  
EXCHANGE RELAYED  
LINE UNIT

(70503)

ISSUE DATE 27-3-63 APP

50V E

AMENDMENT PARTICULARS

NZ.P.O

DRAWN CHECKED WIRING CIRCUIT

GBU 17070

