


5 Centimetres 10 15 20 25 30

FIG. 1A. E. FOR IG.
D.S.R. REGULAR & PARTY LINE.
AS SEEN FROM REAR.

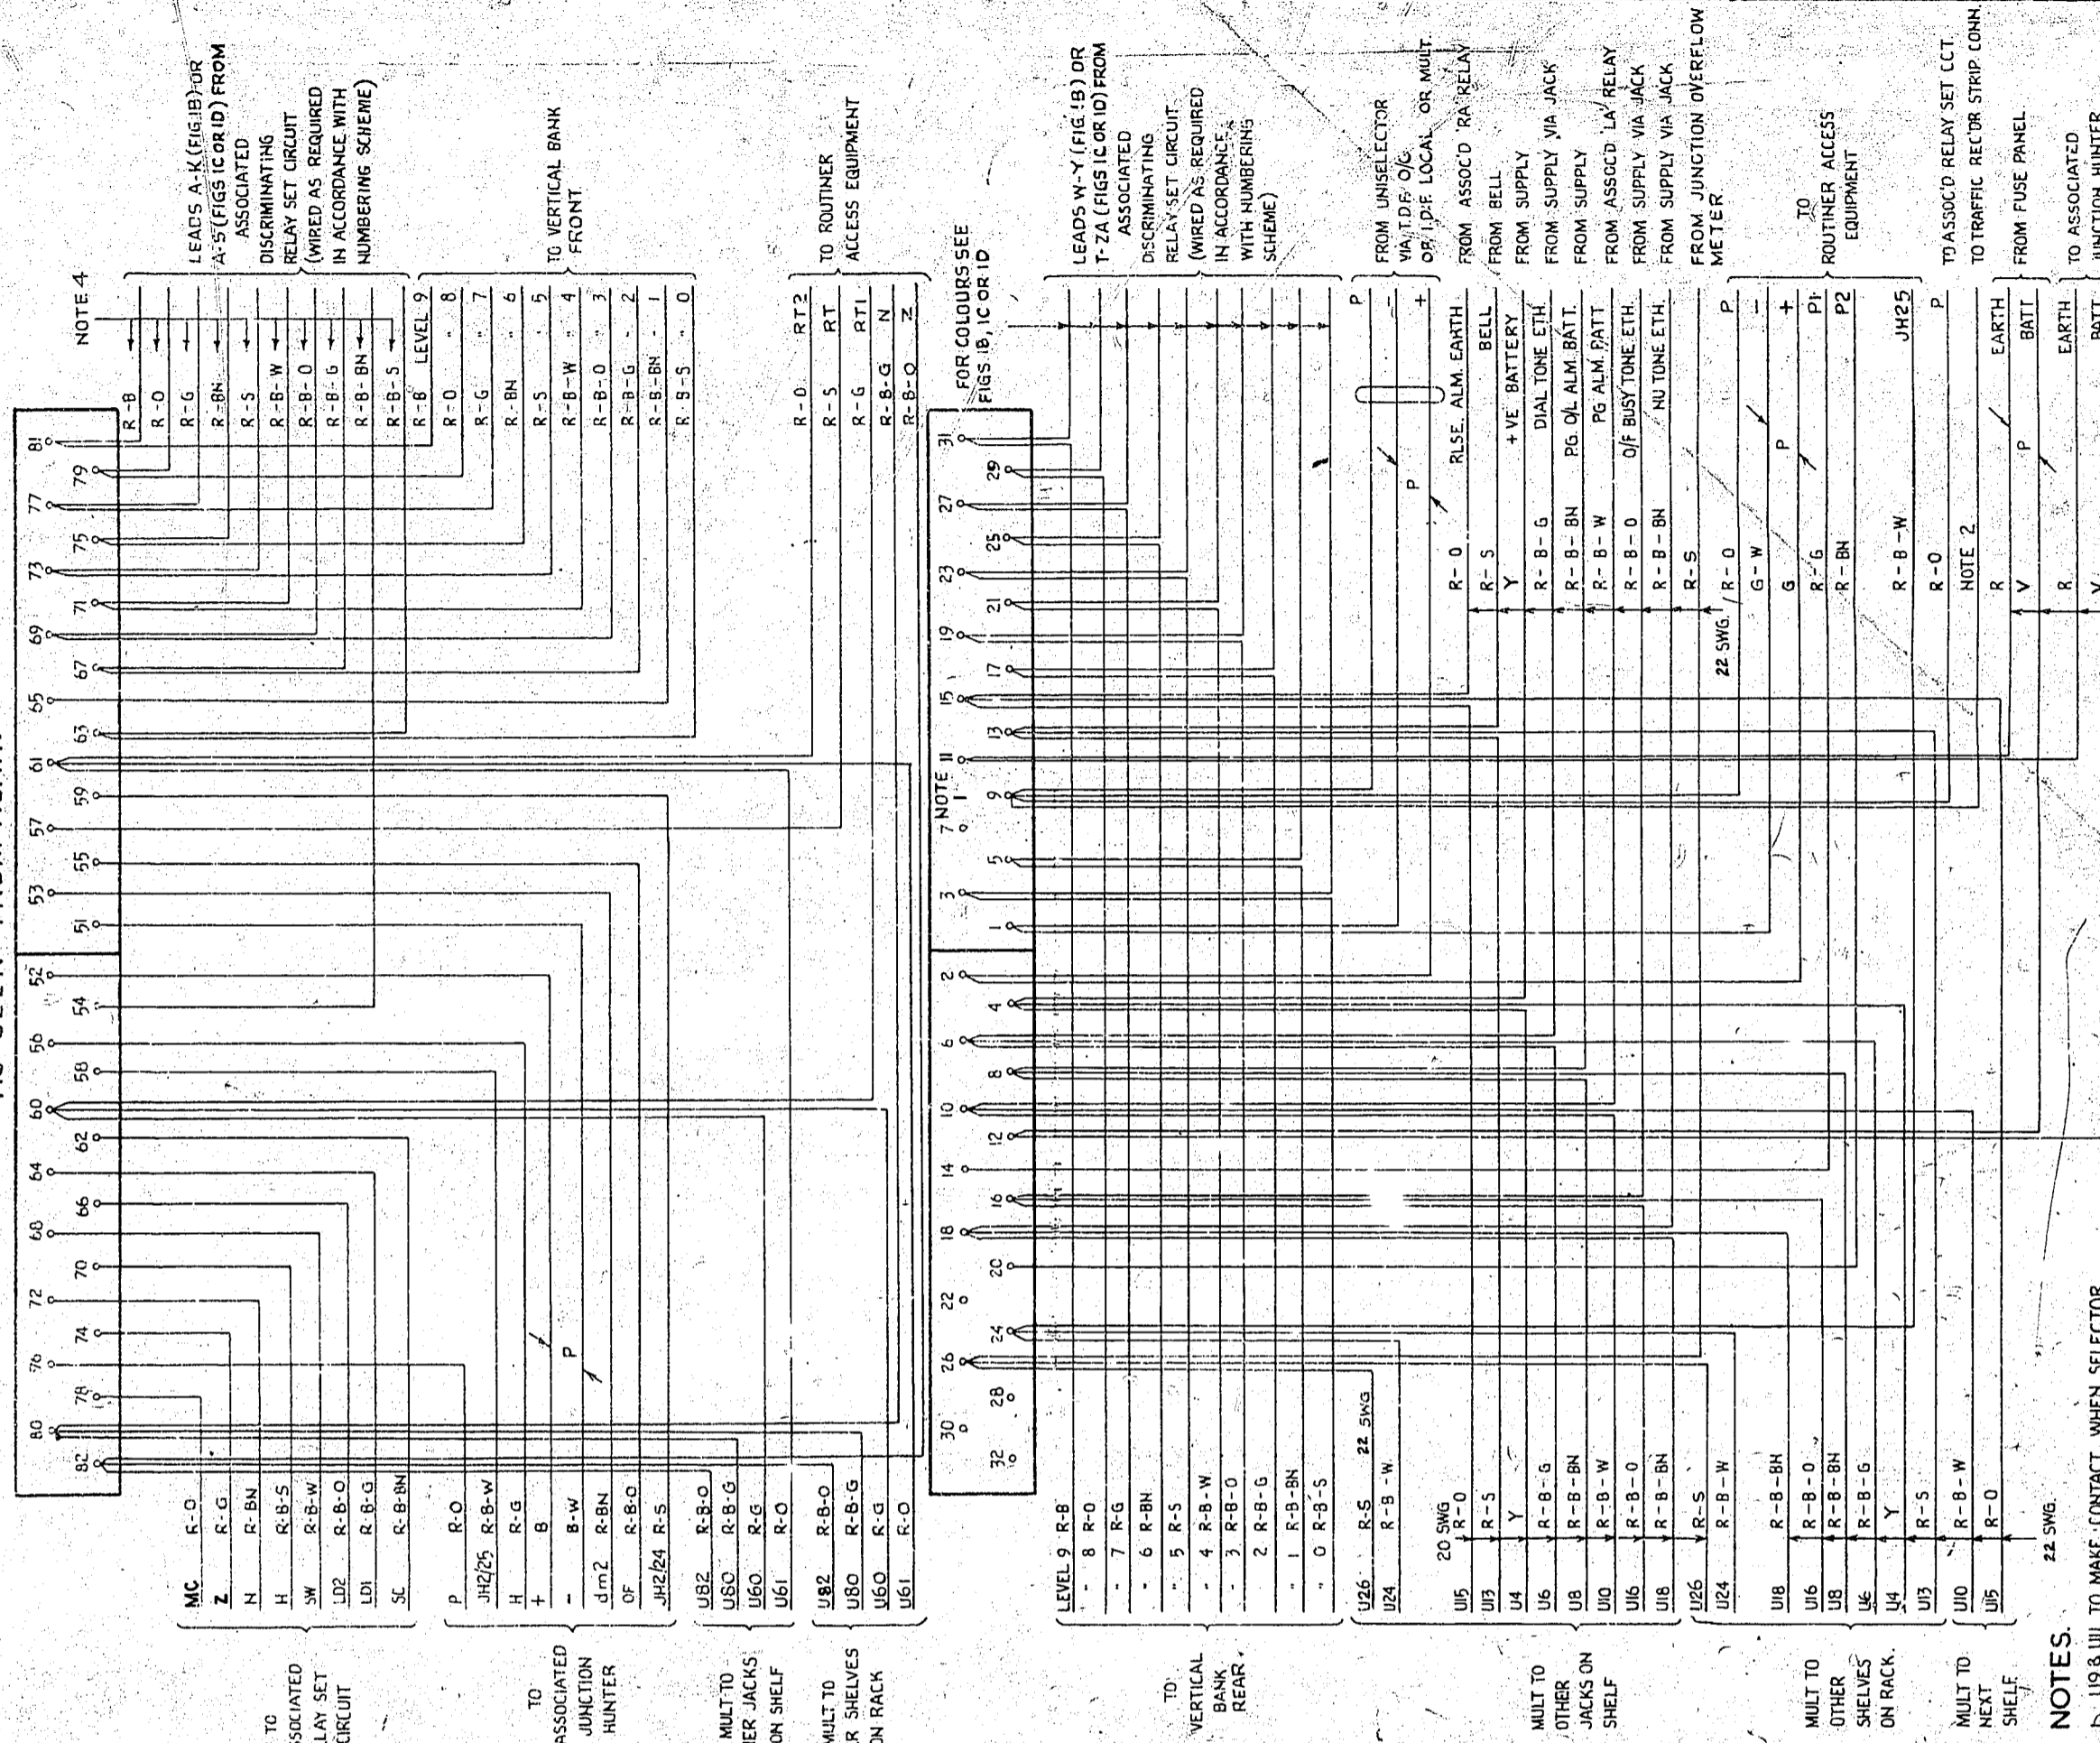

LEVEL 9 R-B	8 R-O	7 R-G	6 R-BN	5 R-S	4 R-B-W	3 R-B-O	2 R-B-G	1 R-B-BN	0 R-B-S
LEVEL 10 R-O	20 SWG	R-S	Y	R-B-G	R-B-BN	R-B-W	R-B-O	R-B-BN	R-S
U24 R-B-W	U18 R-B-BN	U16 R-B-O	U8 R-B-BN	U6 R-B-G	U4 Y	U3 R-S	U2 R-B-W	U1 R-O	

DISCRIMINATING SELF REPEATER			
REGULAR & PARTY LINE			
200 OUTLET 2000 TYPE			
WITH OVERFLOW ROUTING FACILITY			
WAS GBU 10420/1/2/3/4 MOD B (2498)		9-7-73	BSH
AMENDMENT PARTICULARS		ISSUE	DATE APP'D.
N.Z. P.O.	DRAWN	CHECKED	WIRED ENGINEER
GBU 20180 20181 20182		20183 20184 SHEET 1-3	

- NOTES.**
- U9 & U11 TO MAKE CONTACT WHEN SELECTOR IS REMOVED.
 - COLOUR FOR 1st. PAIR OF SHELVES R-O, R-G
 - ALL WIRE TO BE 23 SWG UNLESS OTHERWISE SPECIFIED
 - THESE COLOURS APPLY ONLY WHEN SELECTOR IS USED IN CONJUNCTION WITH RELAY SET TO GBU 10420/1/2/3/4 MOD B (2498) OR GBU 10422/2/3/4 MOD B (2498). WHEN USED WITH FIG 1B SEE GBU 10420 FIG 1B FOR COLOURS OF THESE LEADS

5. ON SOME EARLY EQUIPT. NEG BATT WIRING IS BK AND POS. BATT WIRING IS R-B.

0
5 Centimetres
10
15
20
25
30

AS SEEN FROM REAR

NOTE 1



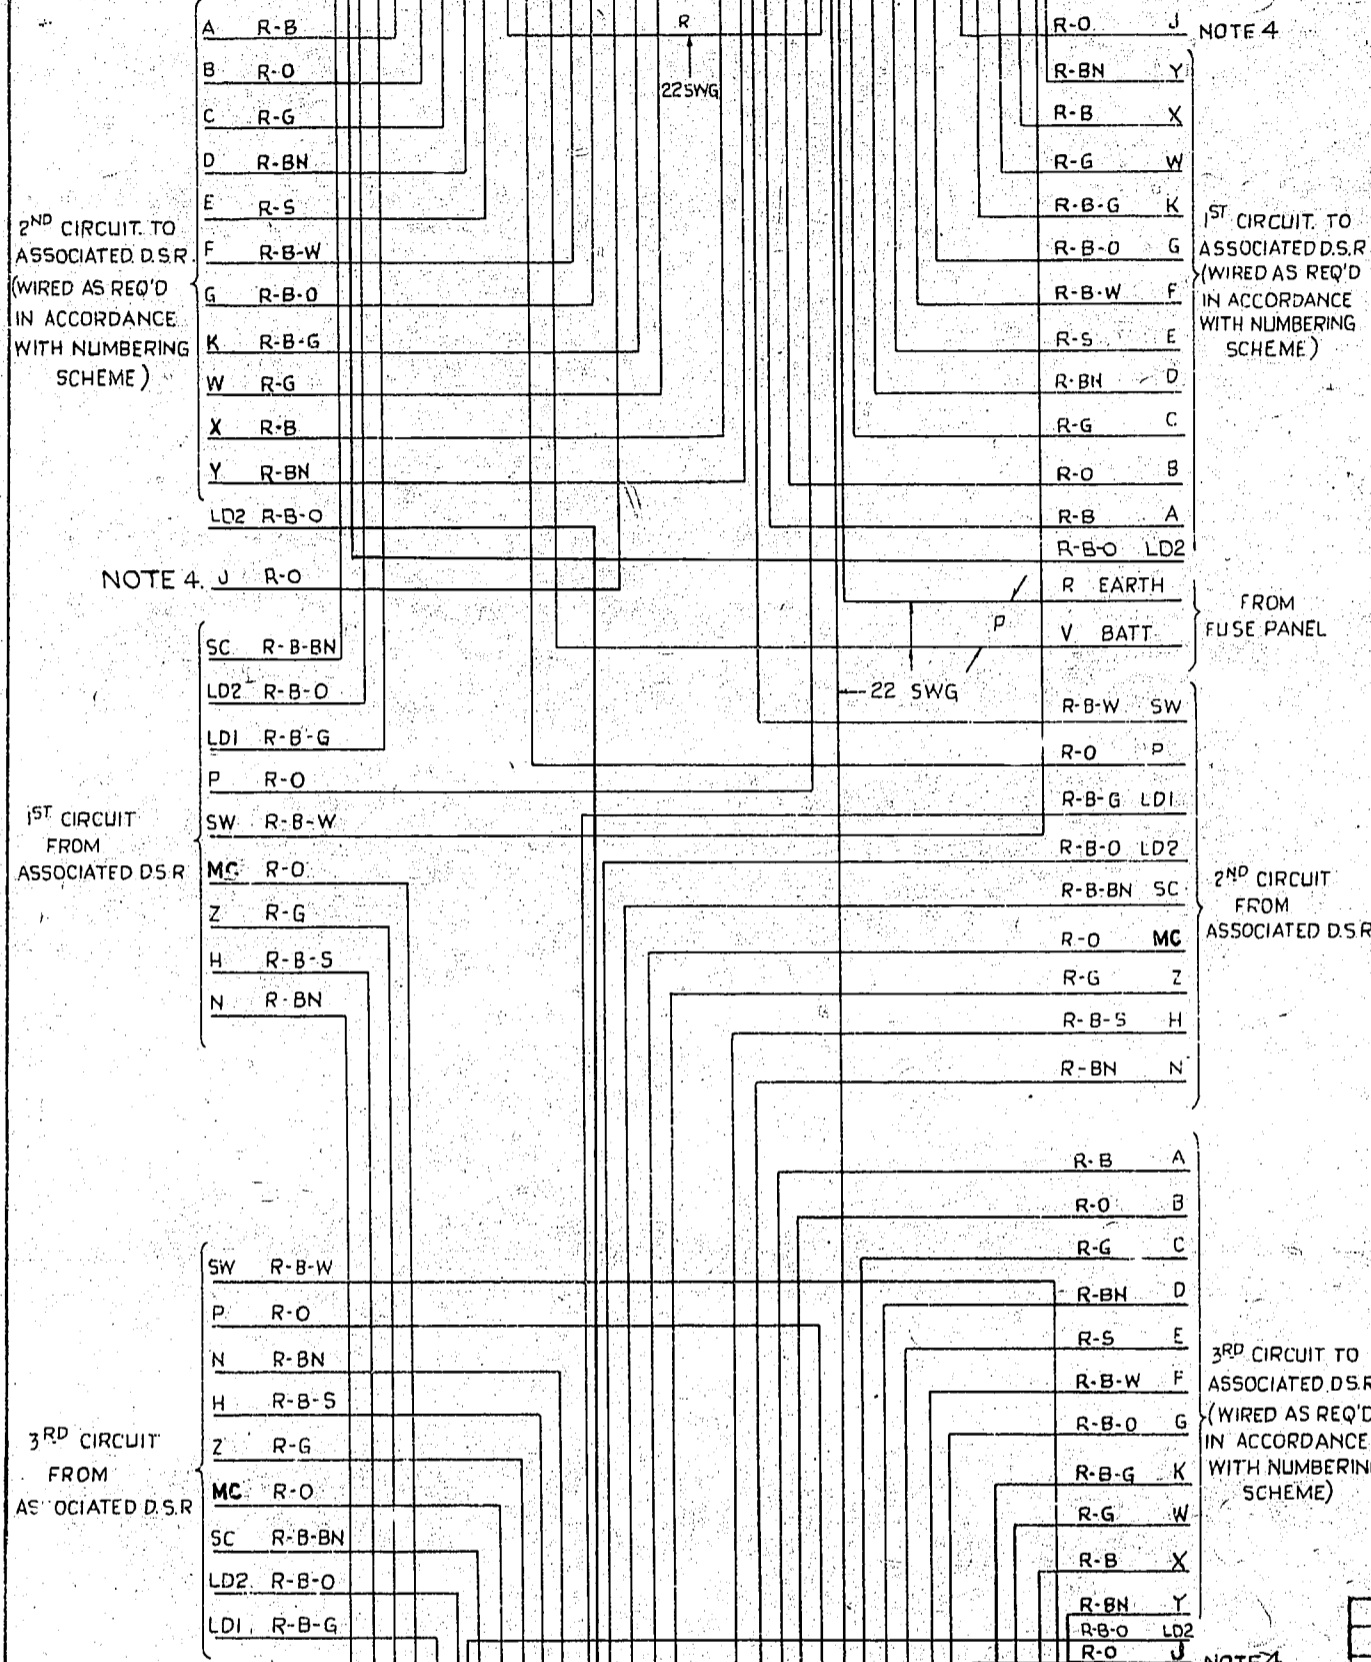


FIG. 1B
DISCRIMINATING RELAY SET.
ABSORBS 1ST DIGIT. DISCRIMINATES ON 1ST & 2ND

NOTE 1



AS SEEN FROM REAR

NOTE 2

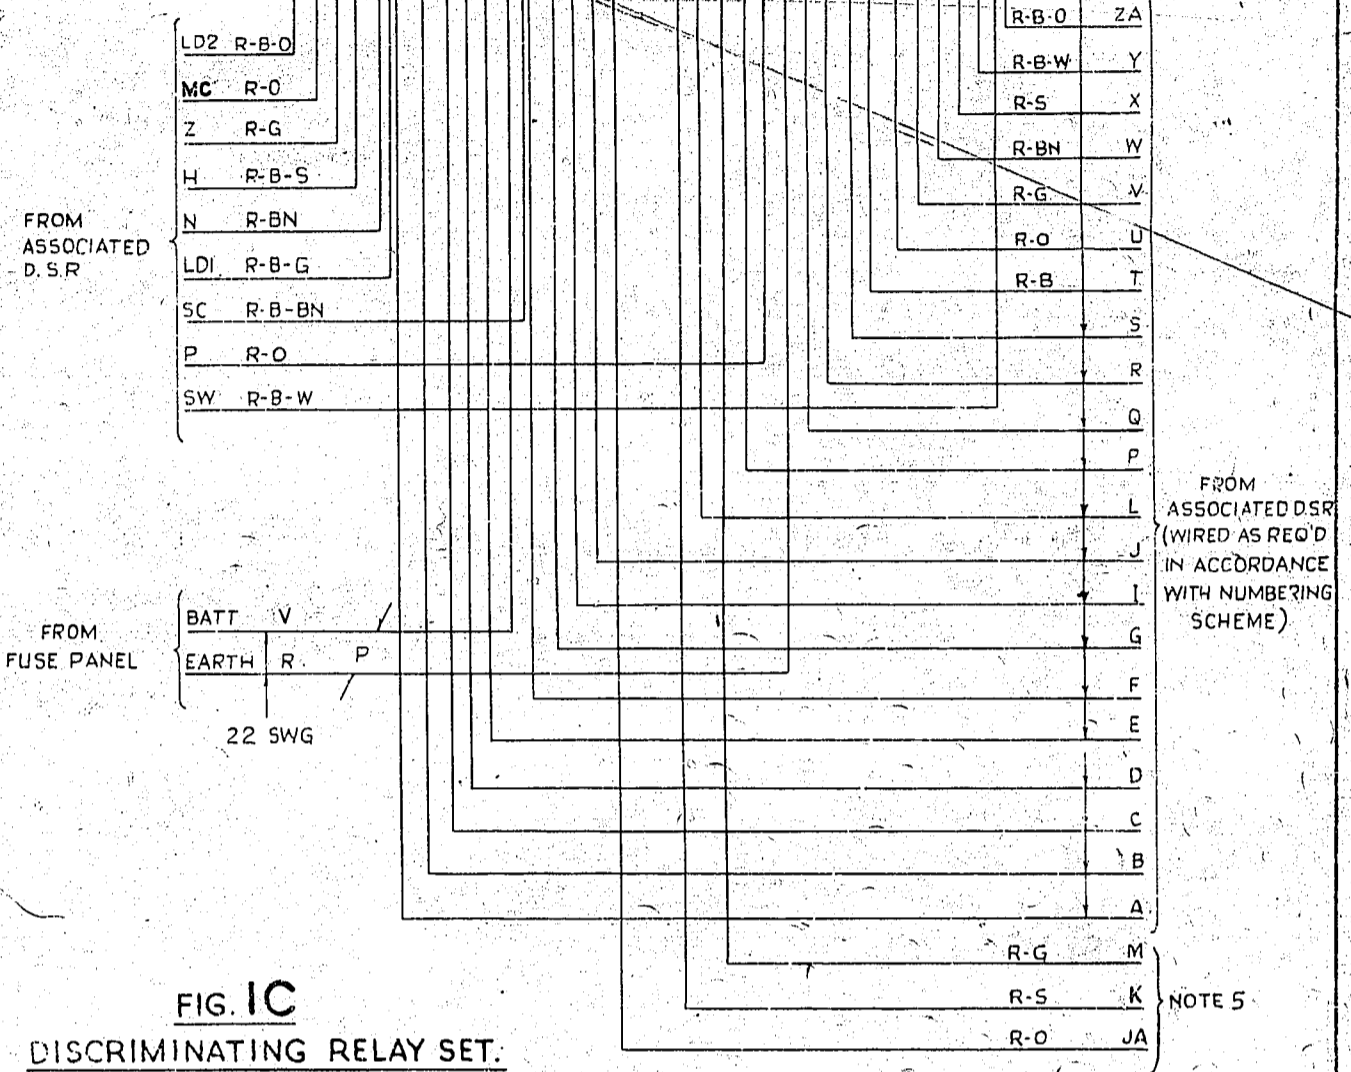



FIG. 1C
DISCRIMINATING RELAY SET.
ABSORBS 1ST & 2ND DIGITS, DISCRIMINATES ON 1ST, 2ND & 3RD
(ONE CIRCUIT PER BASE)


NOTES

- 1 JACK POINTS U9 & 11 U14 & 16 AND U59 & 61 (FIG 1B) TO MAKE CONTACT WHEN RELAY SET IS REMOVED.
- 2 JACK POINTS U9 11 (FIG 1C) TO MAKE CONTACT WHEN RELAY SET IS REMOVED.
- 3 ALL WIRING TO BE 25 SWG UNLESS OTHERWISE SPECIFIED.
- 4 LEAD J (FIG 1B) IS LOOPED TO POINT ON SAME SHELF JACK AS REQUIRED IN ACCORDANCE WITH NUMBERING SCHEME.
- 5 LEADS M, K & JA (FIG 1C) ARE LOOPED TO POINTS ON SAME SHELF JACK AS REQUIRED IN ACCORDANCE WITH NUMBERING SCHEME.
- 6 ON SOME EARLY EQUIPMENT WIRING IS BK.

				DISCRIMINATING SELR REPEATER	
				REGULAR & PARTY LINE	
				200 OUTLET 2000 TYPE	
				WITH OVERFLOW ROUTEING FACILITY	
W:5 GBU 10420/1/2/3/4 MOD 6 (2458)		1		9-7-73 BSH	
AMENDMENT PARTICULARS		ISSUE		DATE	
				50V E	
N.Z. P.O.		DRAWN		WIRING ENGINEER	
		CHECKED		R ⁶	
				GBU 20180 20183 SHEET 2-3	
				20181 20184	
				20182	

0 5 Centimetres 10 15 20 25 30

AS SEEN FROM REAR.

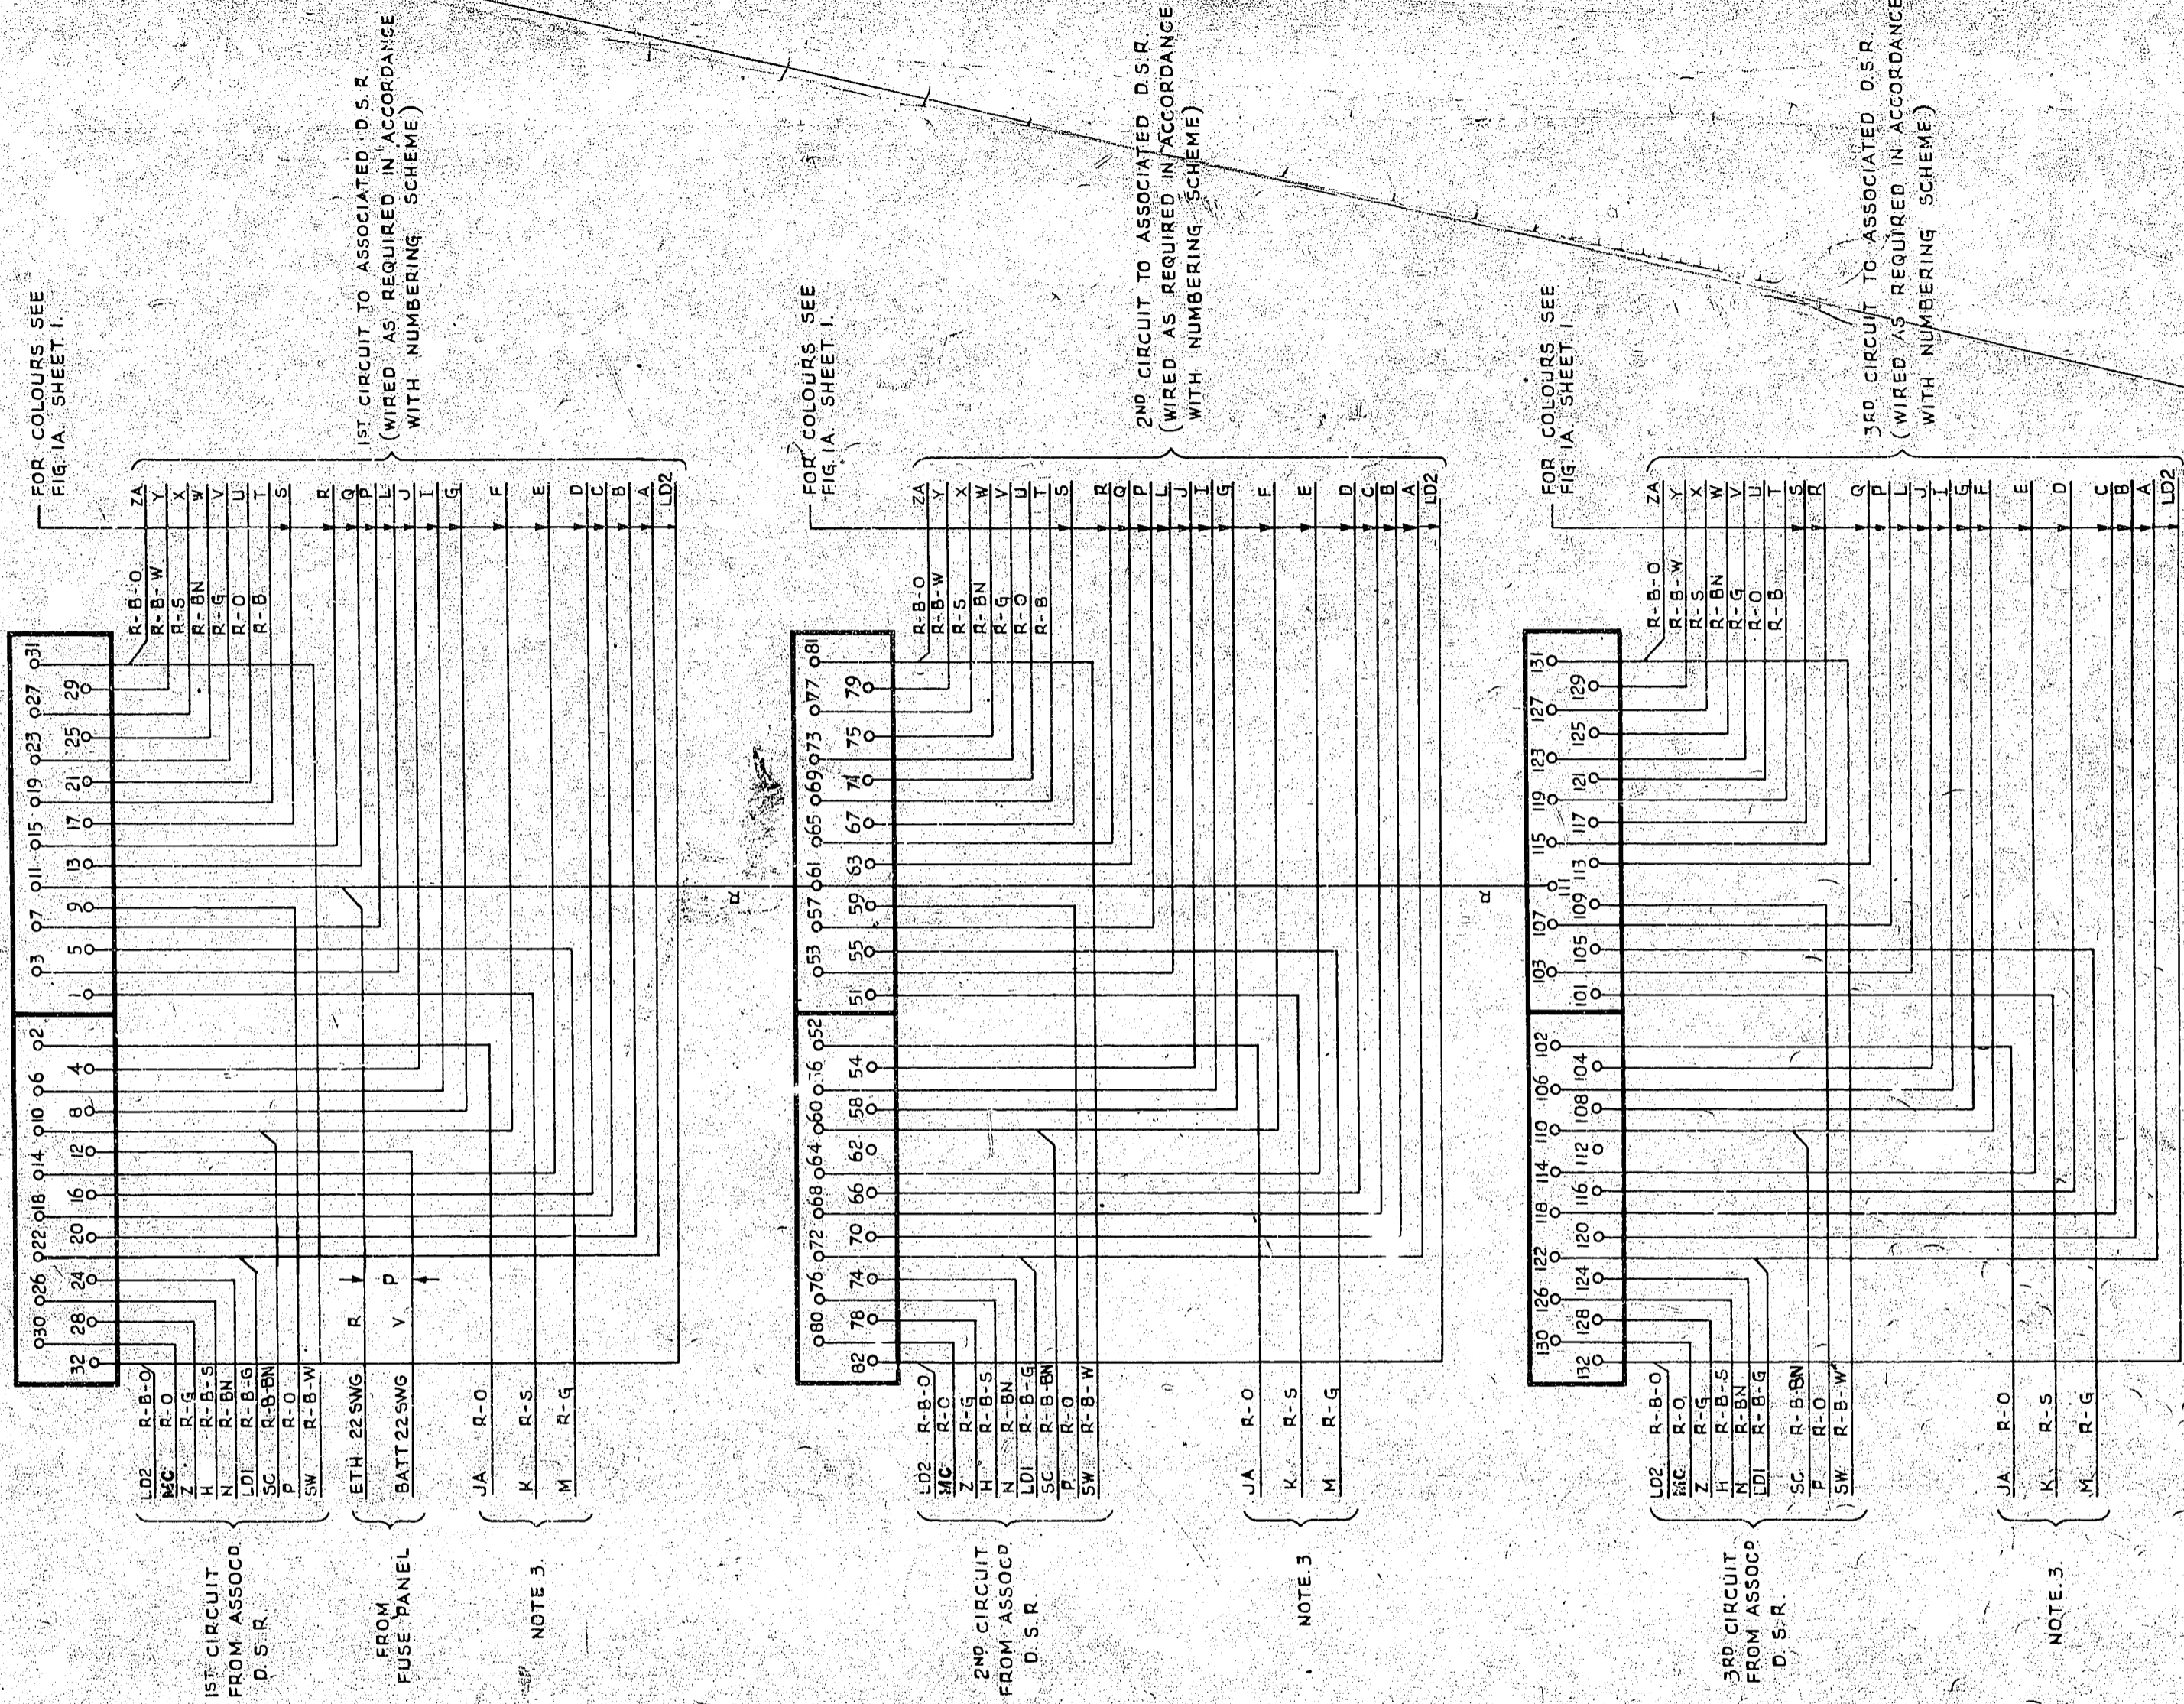

NOTES:-

- ALL WIRING TO BE 25 SWG UNLESS OTHERWISE SPECIFIED.
- JACK POINTS U9 & U11, U59 & U61, U109 & U111 TO MAKE CONTACT WHEN RELAY SET IS REMOVED.
- LEADS M, K & JA ARE LOOPED TO POINTS ON SAME SHELF JACK AS REQUIRED IN ACCORDANCE WITH NUMBERING SCHEME.
- ON SOME EARLY EQUIPMENT BATTERY WIRING IS BK.

FIG. 1D
DISCRIMINATING RELAY SET.

ABSORBS 1ST & 2ND DIGIT.
DISCRIMINATES ON 1ST, 2ND & 3RD
(3 CIRCUITS PER BASE.)

DISCRIMINATING SELF REPEATER REGULAR & PARTY LINE 200 OUTLET 2000 TYPE WITH OVERFLOW ROUTING FACILITY			
WAS GBU 10420/1/2/3/4 MOD B (2498)	1	6-7-73	BSH
AMENDMENT PARTICULARS	ISSUE	DATE	APPD.
N.Z. P.O.	DRAWN	CHECKED	WIRING
			CIRCUIT.
GBU 20180 20181 20182			20183 20184
SHEET 3-3.			