


FIG.1 TONE & TIME PULSE CCT.

FIG.2 RINGING & METER PULSE CCT.

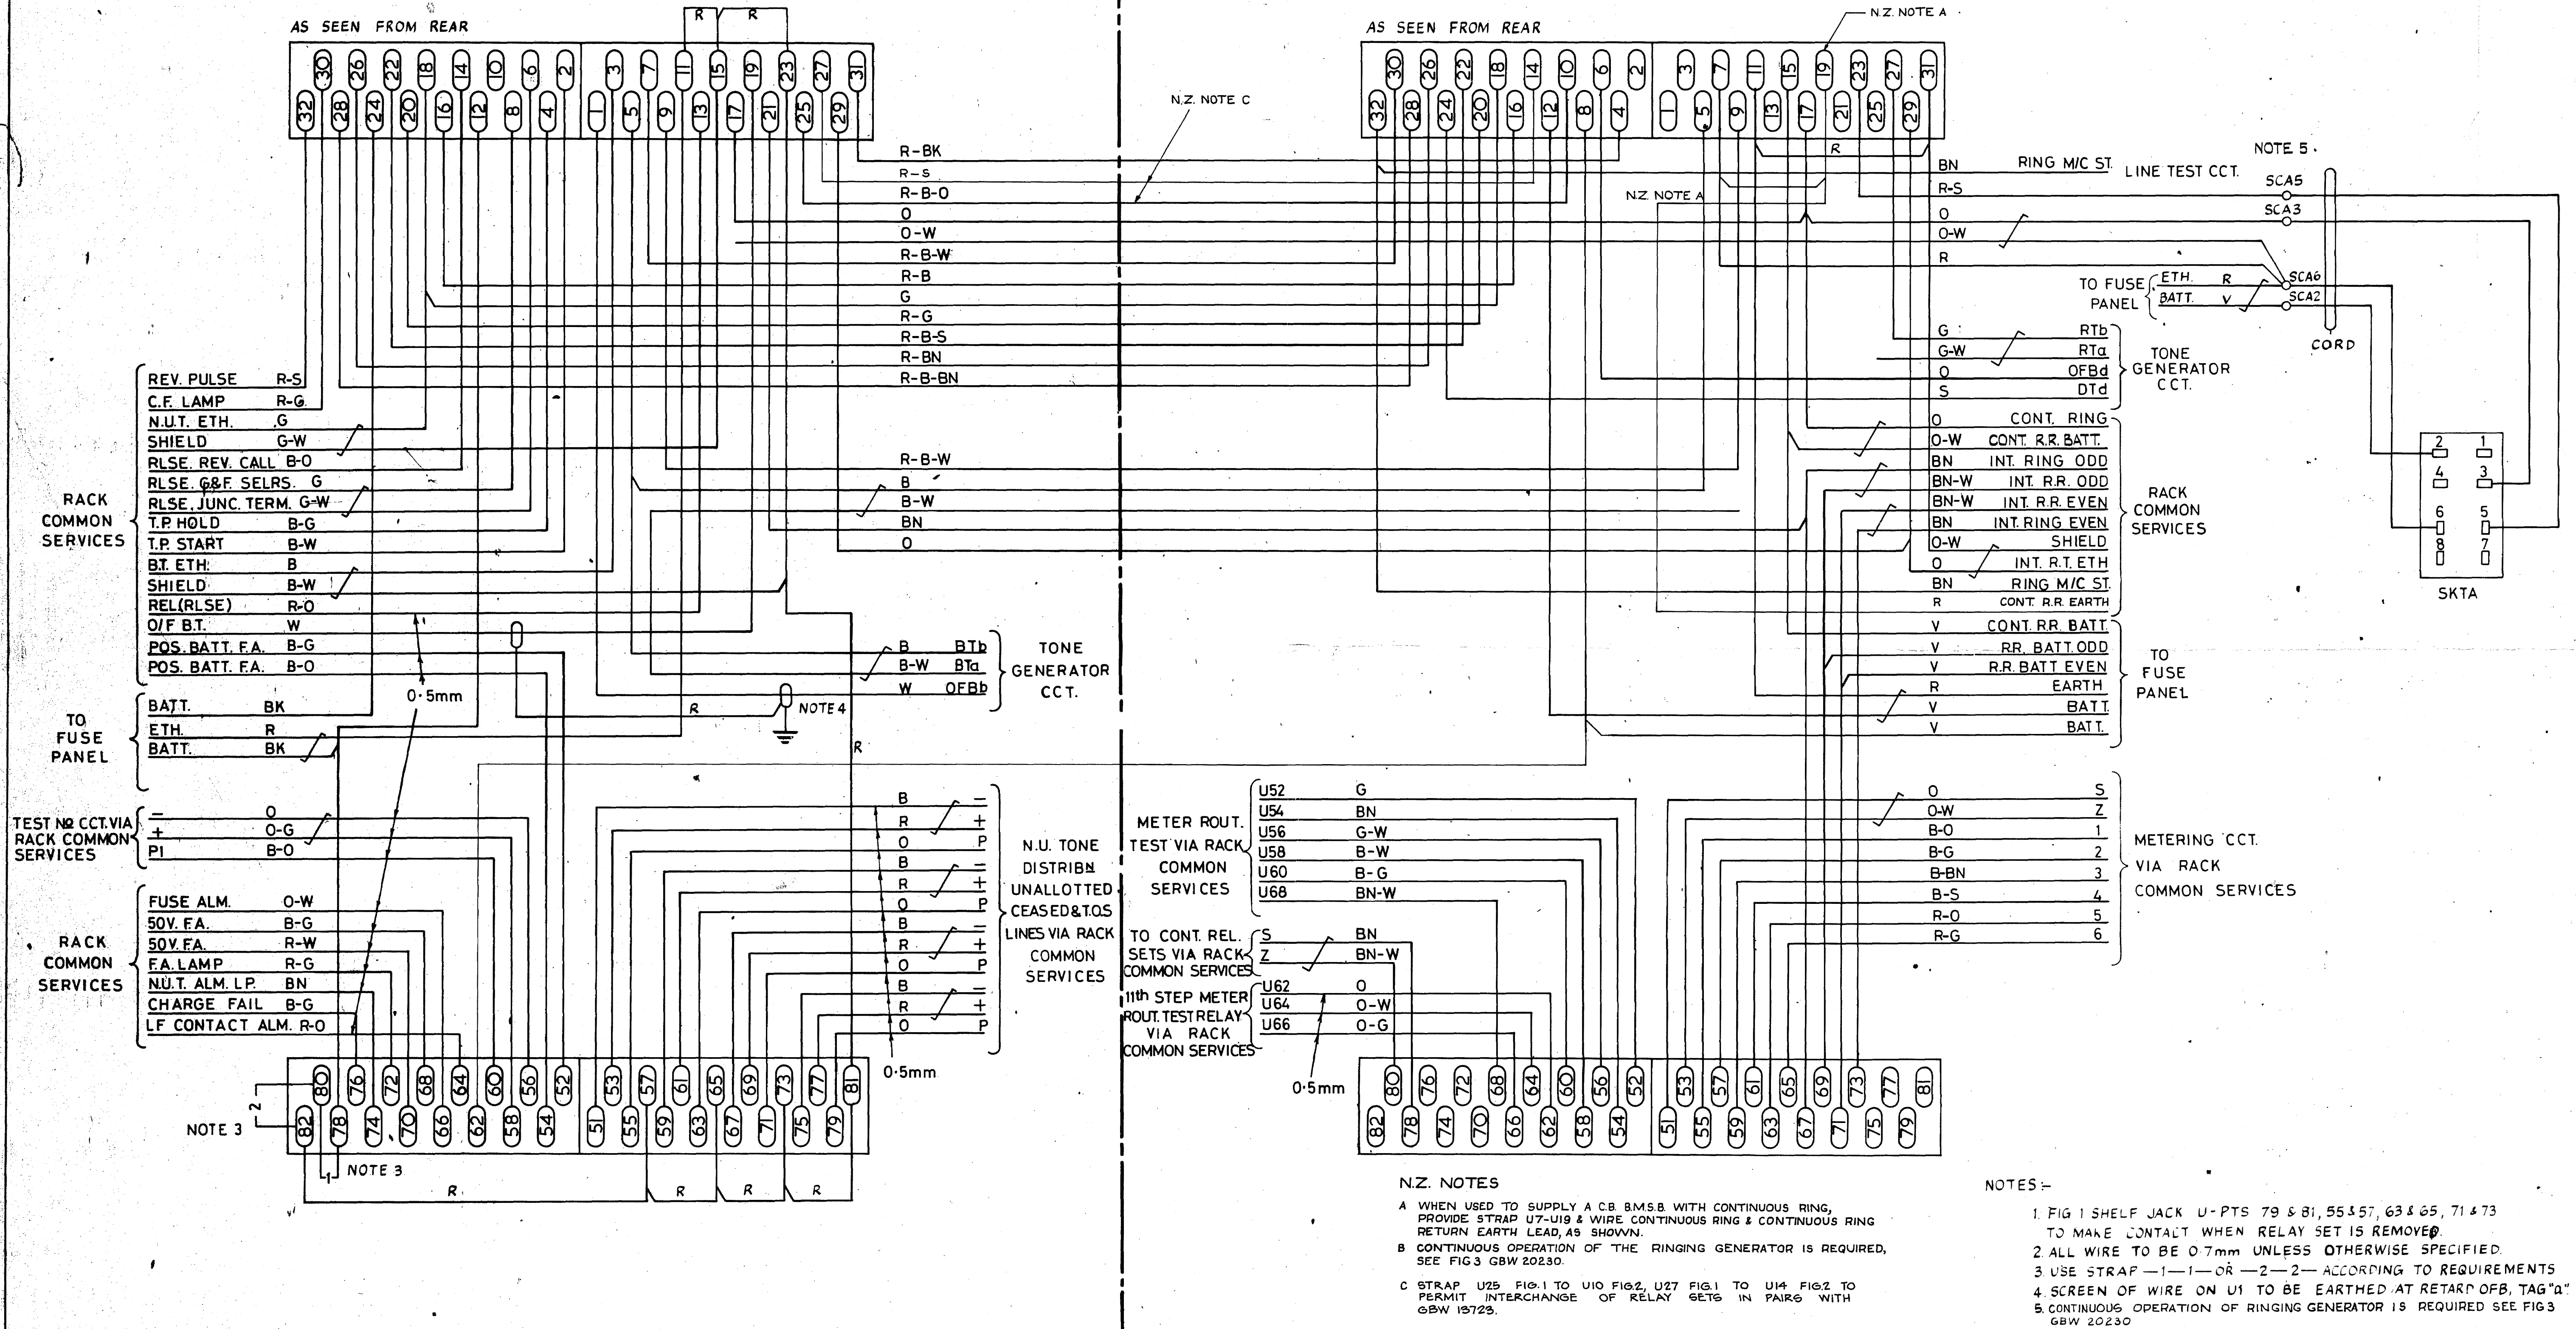

N.Z. NOTES

A WHEN USED TO SUPPLY A CB B.M.S.B WITH CONTINUOUS RING, PROVIDE STRAP U7-U19 & WIRE CONTINUOUS RING & CONTINUOUS RING RETURN EARTH LEAD, AS SHOWN.

B CONTINUOUS OPERATION OF THE RINGING GENERATOR IS REQUIRED, SEE FIG 3 GBW 20230.

C STRAP U25 FIG.1 TO U10 FIG.2, U27 FIG.1 TO U14 FIG.2 TO PERMIT INTERCHANGE OF RELAY SETS IN PAIRS WITH GBW 19723.

NOTES-

1 FIG 1 SHELF JACK U-PTS 79 & 81, 55 & 57, 63 & 65, 71 & 73 TO MAKE CONTACT WHEN RELAY SET IS REMOVED.

2 ALL WIRE TO BE 0.7mm UNLESS OTHERWISE SPECIFIED.

3 USE STRAP -1-1-OR-2-2- ACCORDING TO REQUIREMENTS

4 SCREEN OF WIRE ON U1 TO BE EARTHED AT RETARD OFF, TAG "a"

5 CONTINUOUS OPERATION OF RINGING GENERATOR IS REQUIRED SEE FIG 3 GBW 20230

A1	DRN. ARH.	WRG.	50V C
	CKD. D.M.D. CCT.		
A2	G.P.O. CERTIFICATION		
N.Z. NOTE C AMPLD. NZM - RG (193302) 1B P. 6. 78 RED		NOTE 3 AND FOR CONTINUOUS OPERATION OF RINGING (154270) 1A 30.876 C.J.W.	
N.Z. NOTES A-C ADD. (184270) 1 30.976 C.J.W.		AMENDMENT	ISS DATE APPD
TOLERANCES UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN INCHES DIMENSIONS ARE BEFORE FINISHING SYMBOLS TO BSS 308		MATERIAL FINISH	
FRAC. DIMS. DEC. DIMS. ANGLES SQ. TOL. STR. TOL. PAR. TOL. WIDE CONC. TOL. WIDE DIA.		TITLE U.A.X. NZ13 MODIFICATION DIAGRAM FOR COMMON EQUIPMENT RINGING TONES & PULSES USING ELECTRONIC GENERATORS FOR CONVERSION OF GBU13720 AND OF NZPO 26725 (GEC 193536)	
HOLES - DIA. SYMMETRY - TOLERANCE OF THE DIMENSION SYMMETRIC ABOUT C IS EQUALLY DIVIDED ABOUT THE C		SIZE A1	
NZPO		GBU 20230	