

5 Centimetres
 10
 15
 20
 25
 30

FIG. 5 BATTERY FEED CIRCUIT

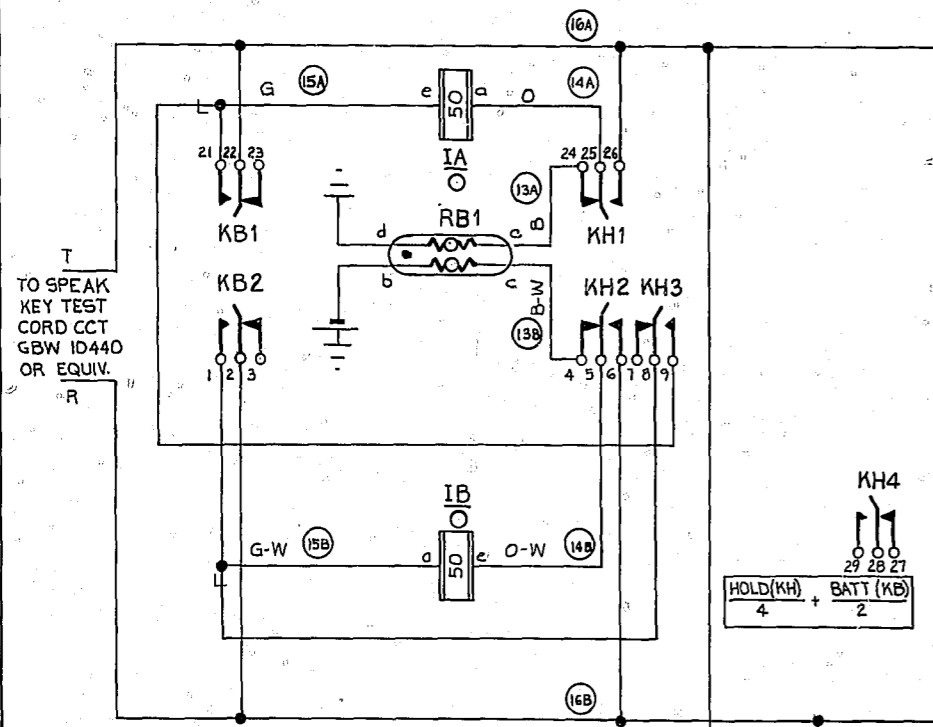


FIG. 1 RINGING CORD CIRCUIT

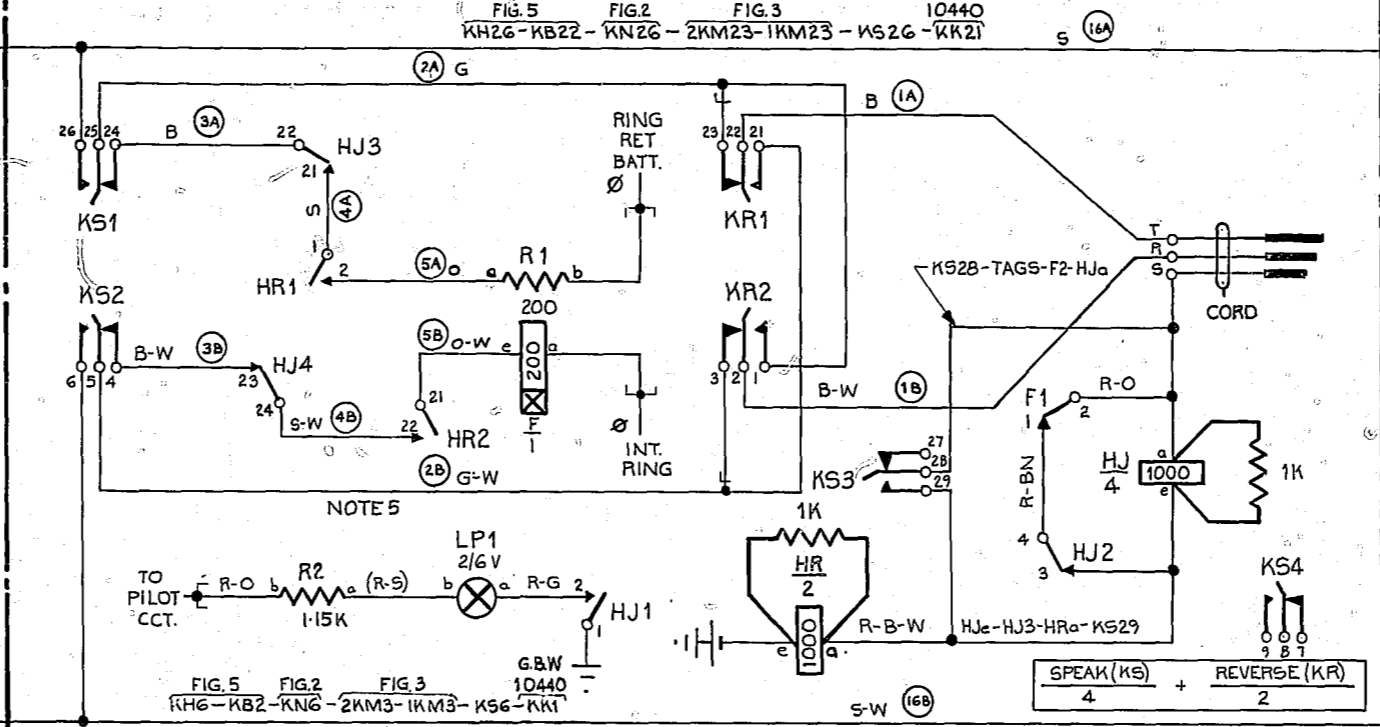


FIG. 2 SPEAKING CORD CIRCUIT

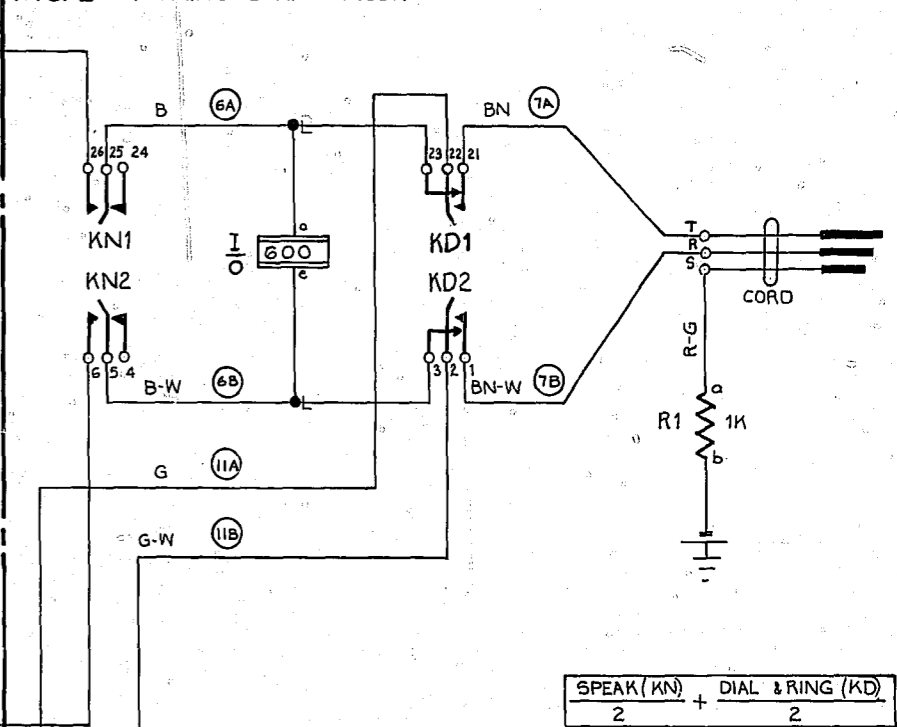


FIG. 3A CONNECTING CORD CIRCUIT


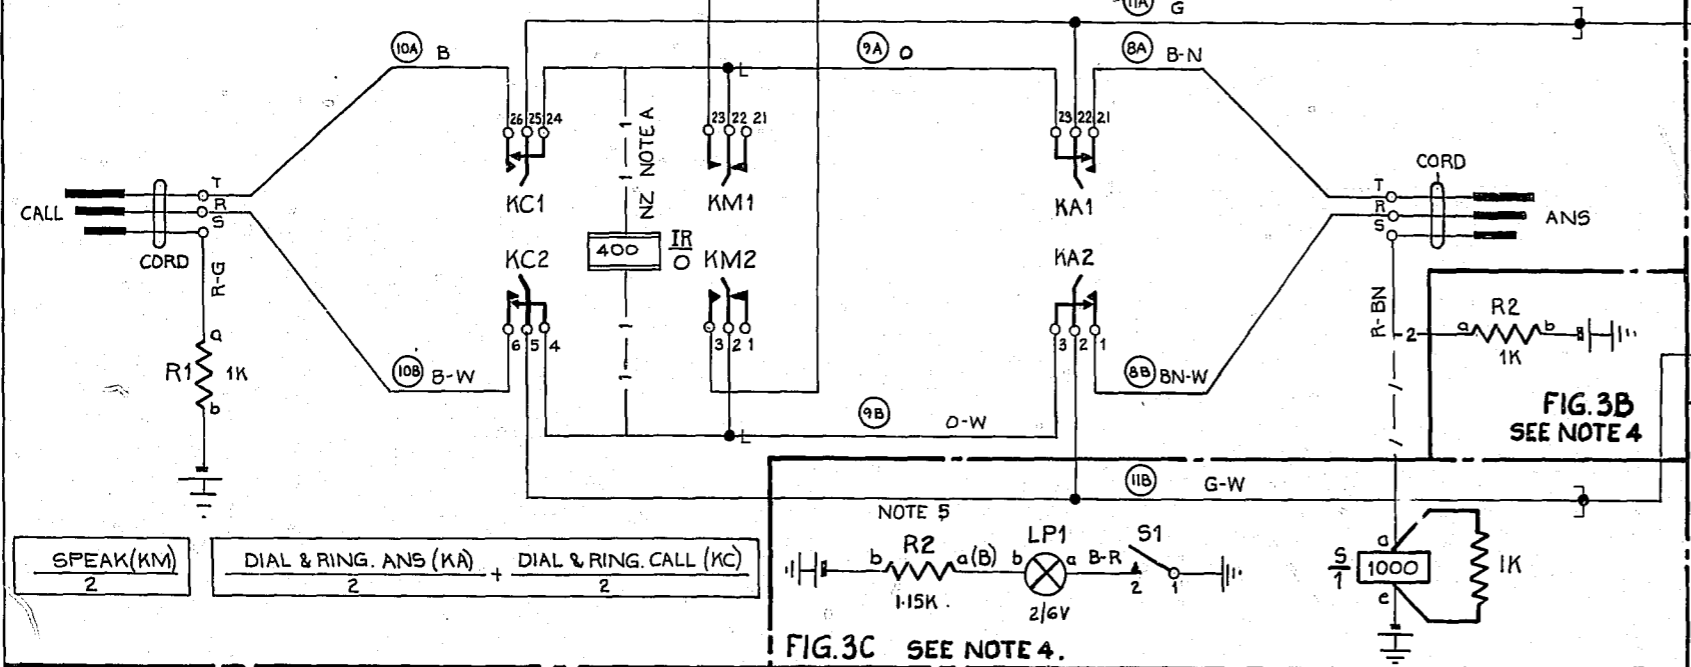


FIG. 4 DIAL SWITCHING CIRCUIT

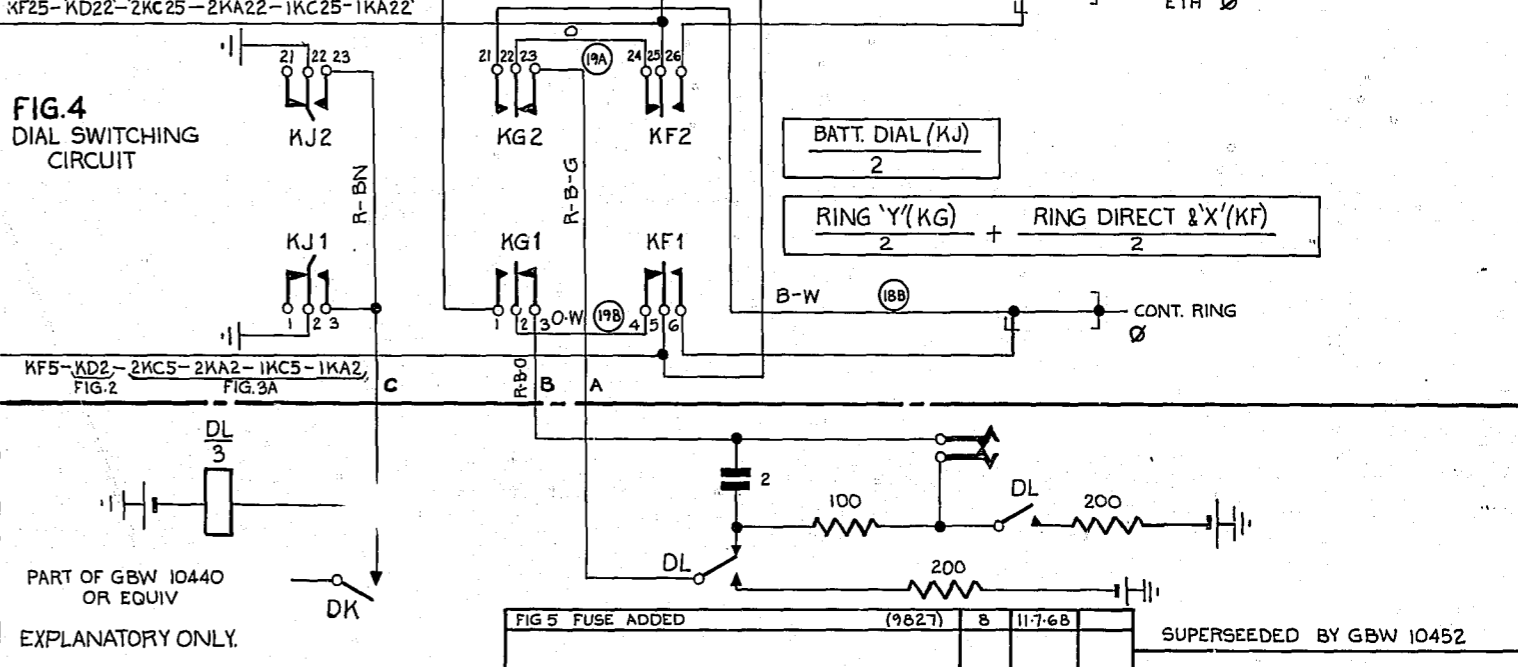

NOTES

- FUSE 1.5A PER TEST SECTION FIGS. 1.2. & 3. FUSE 1.5A PER TEST SECTION FIG. 5 AT SOME EXCHANGES FIG. 5 IS FUSED WITH FIGS. 1.2. & 3.
- ALL WIRING TO BE 0.5mm UNLESS OTHERWISE SPECIFIED.
- Ø FOR WIRING SEE GBW 11480 OR EQUIV.
- WHEN CORD CCT SUPERVISION IS REQUIRED, USE FIG. 3C AND CONNS SHOWN. 1-1-1-1 WHEN CORD CCT SUPERVISION IS NOT REQD. USE FIG. 3B AND CONNS SHOWN. 2-2-2-2

N.Z.P.D. NOTE A:- PROVIDE CONNECTIONS SHOWN — 1 — 1 — 1 — WHEN CONNECTING CORD IS USED FOR ACCESS TO O/G DIALLING CIRCUITS

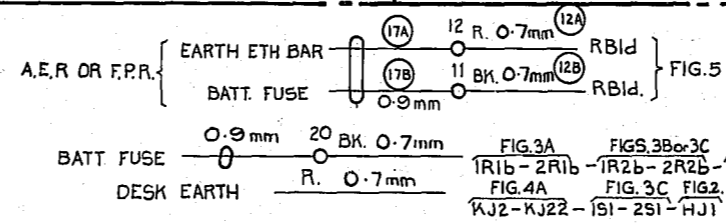


FIG 5 FUSE ADDED		(9627)	8	11-7-68	SUPERSEDED BY GBW 10452
RETRACED & MODIFIED		(157757)	8B	B-5-78	
RETARD IR AND NZPO NOTE A ADDED		(133465)	8A	20-6-77	A.P.
AMENDMENT PARTICULARS		ISSUE	DATE	APPD	
NZPO	DRAWN	HR	CHECKED	WIRING	CIRCUIT
GBW 10451					