


FIG. 1 A-ER. (PER EXCHANGE) POSITIVE BATTERY

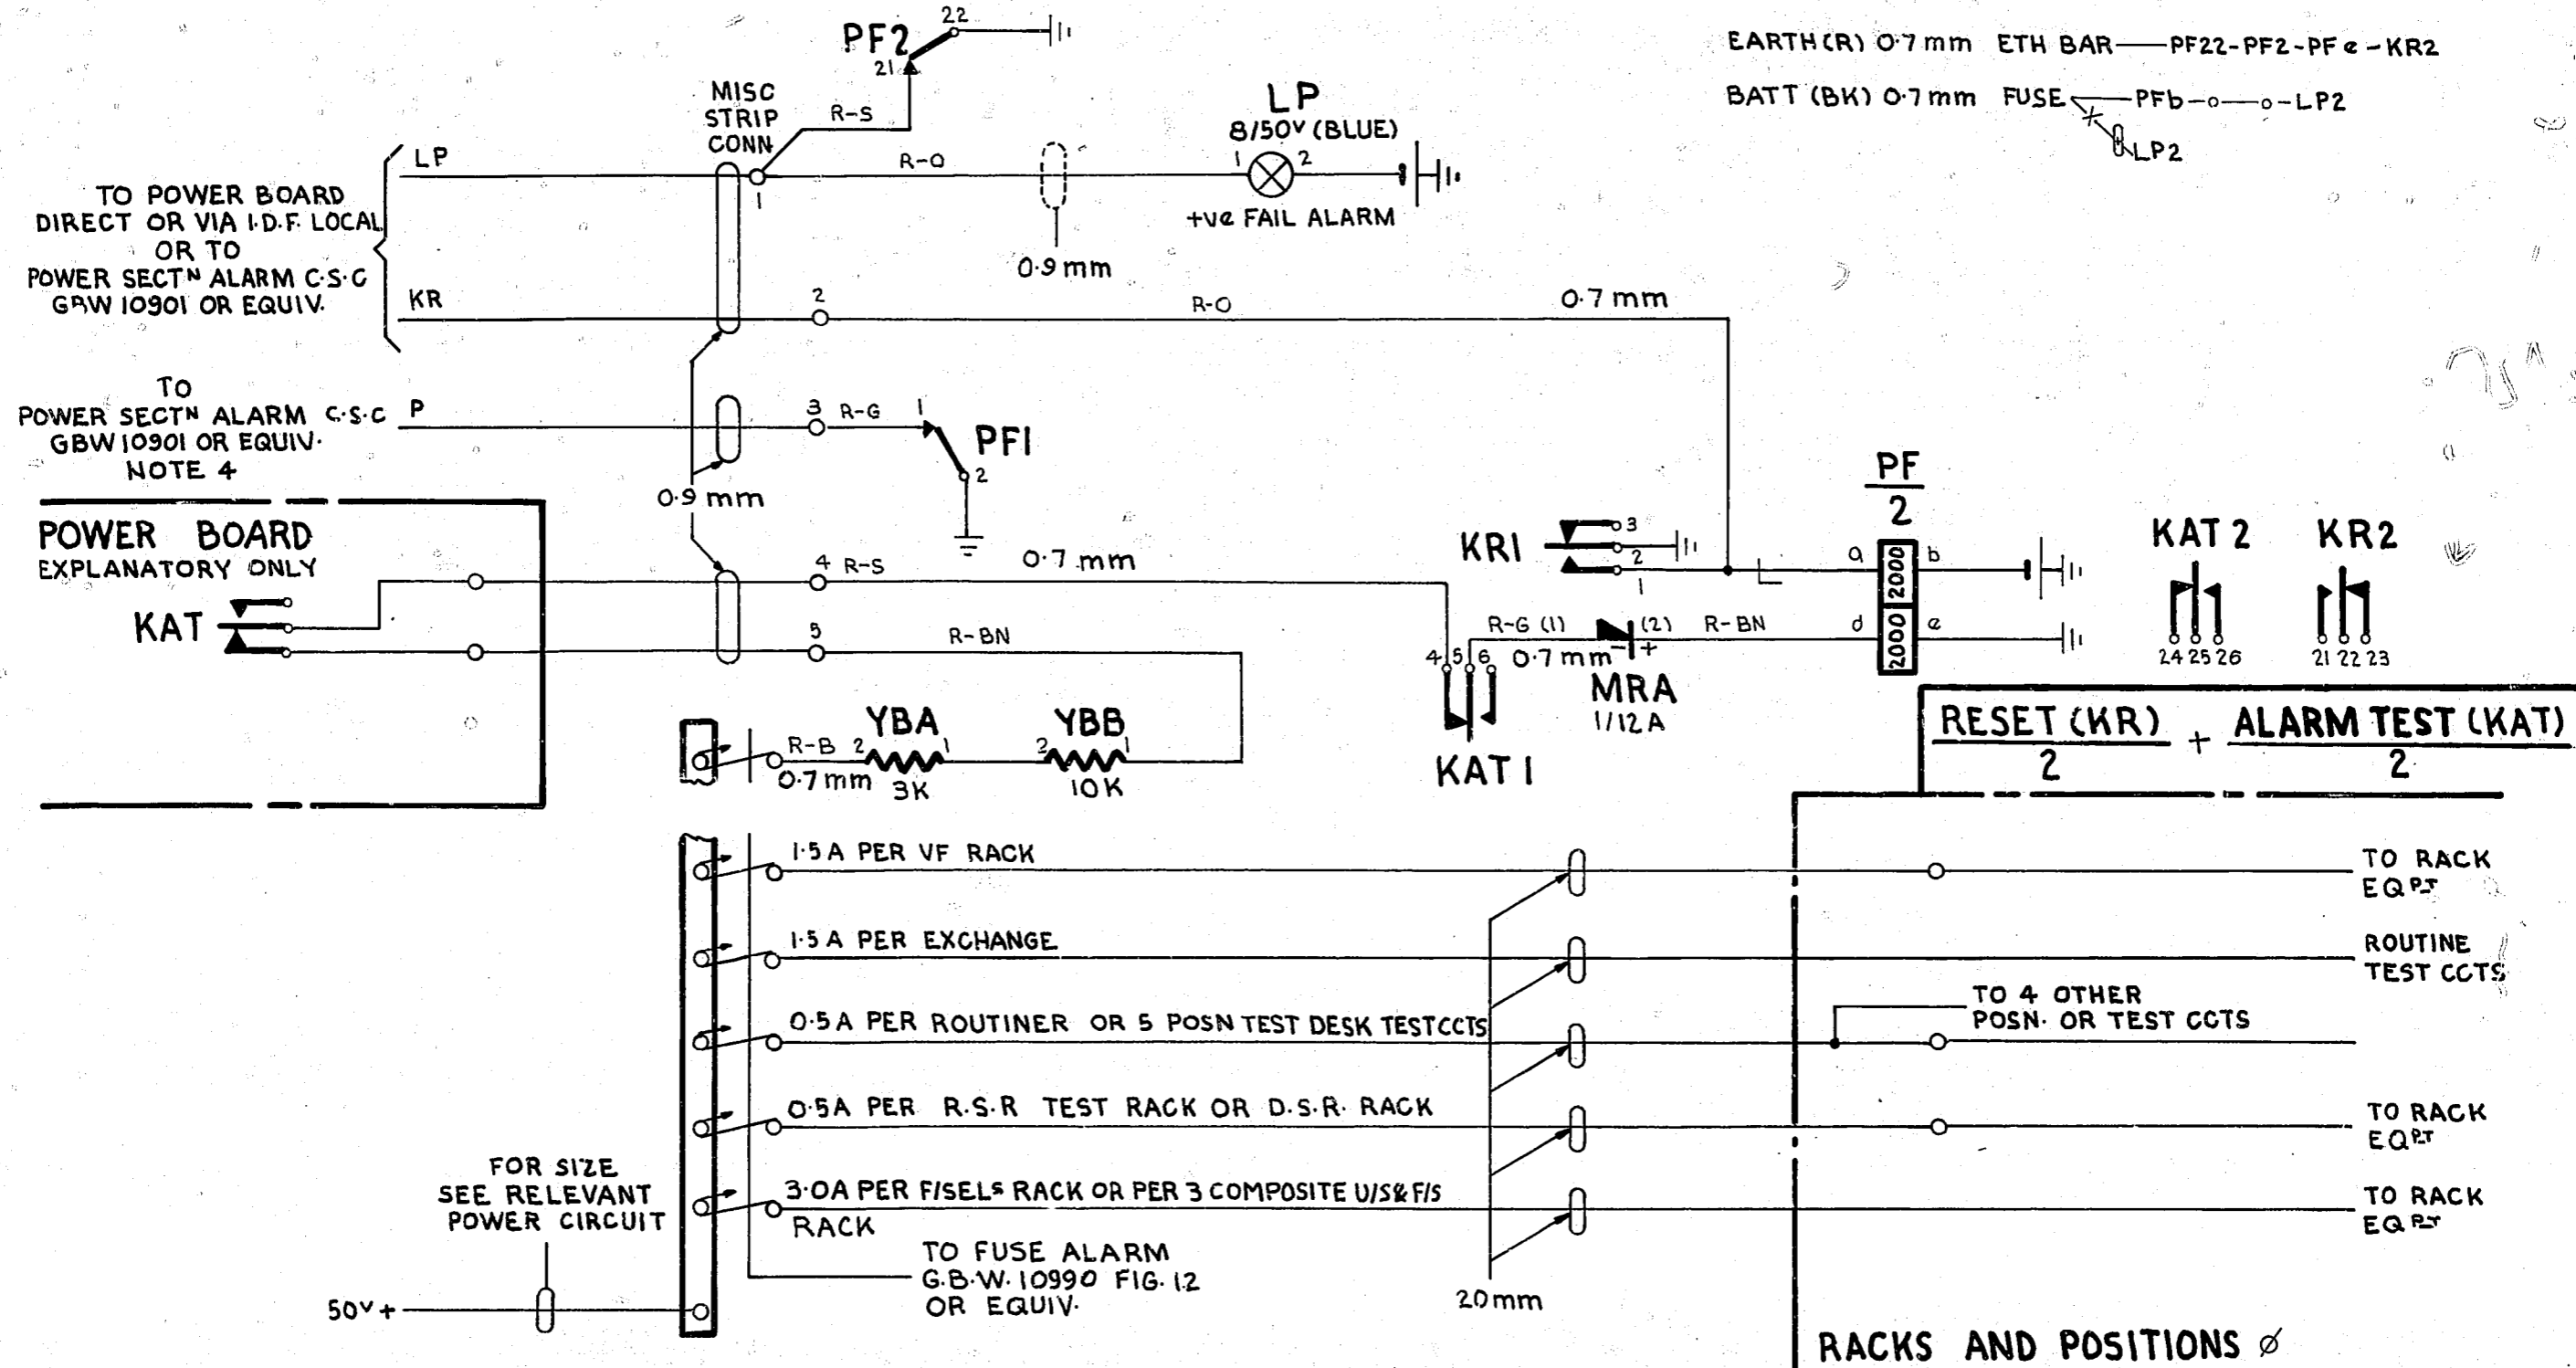

- NOTES
1. ALL WIRING TO BE 0.5mm UNLESS OTHERWISE SPECIFIED
 2. FUSING: 1.5A SERVING FIG. 1
 3. ∅ FOR WIRING SEE RELEVANT COMMON SERVICE DIAGRAM
 4. ON SOME EARLY D.B.F. SYSTEMS THE PLEAD WAS CABLED TO THE POWER BOARD.

ISS	DATE	AMENDMENT PARTICULARS
12A	12.3.80	RETRACED FROM ISS 12 OF 13.3.64 (17071)
12	13.3.64	REF. TO COMPOSITE U/S & F/S ADDED (12436)
11	15.7.63	LV & NOTES 5 & 6 DELETED
10	15.7.63	LV & NOTES 5 & 6 ADDED
9	14.11.61	SUPERSESION NOTE ADDED.

SUPERSEDED BY GBW 15340 FIG. 6

POSITIVE BATTERY DISTRIBUTION AND ALARM ARRANGEMENTS

50V | E

PROOF

DRN MK	CKD	ORIGIN T-E
TCD	APPD	STANDARD
NZPO ENGINEER-IN-CHIEF, WELLINGTON		
SHT OF	GBW 1000	
SIZE A3		

SLOW RELEASE
 SLOW OPERATE

