
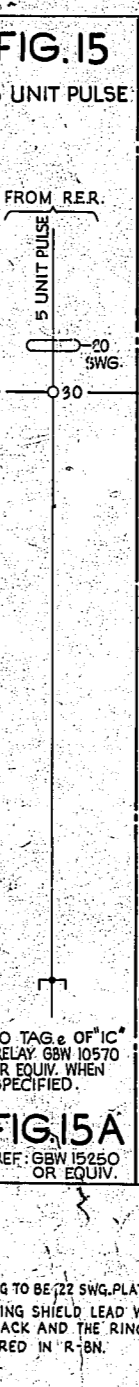
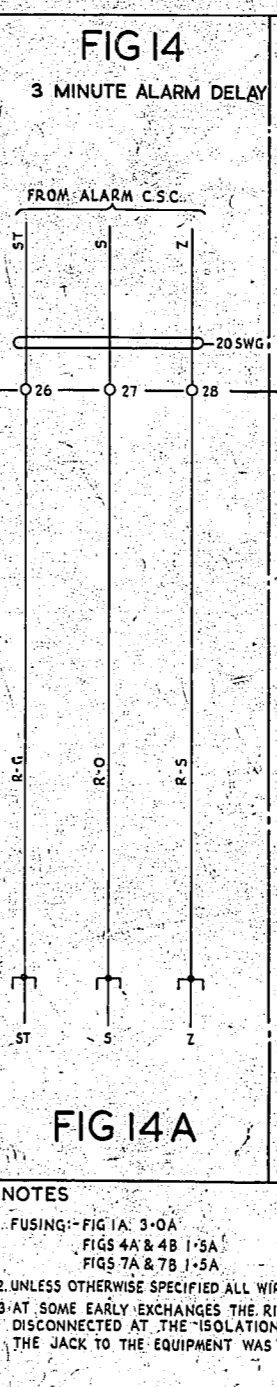
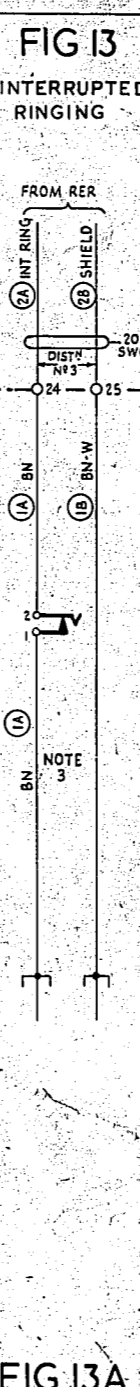
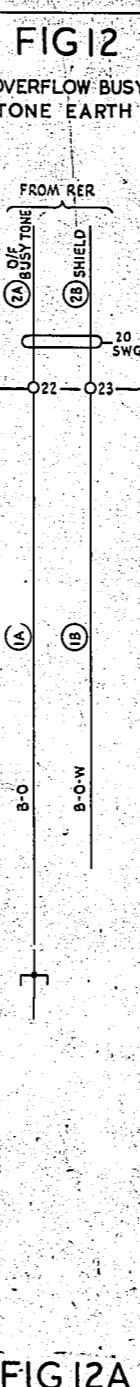
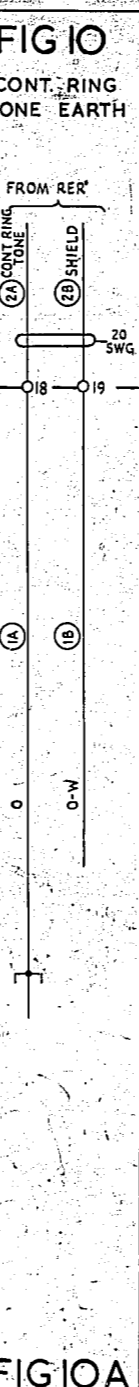
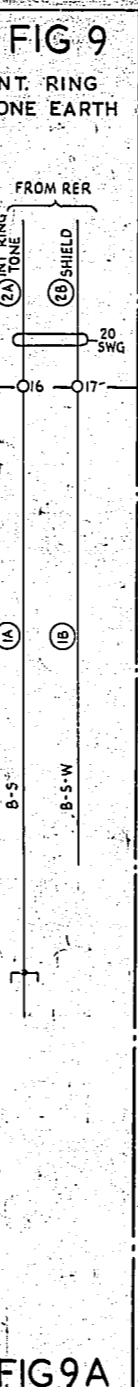
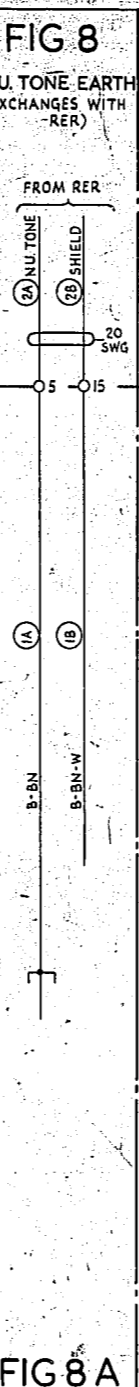
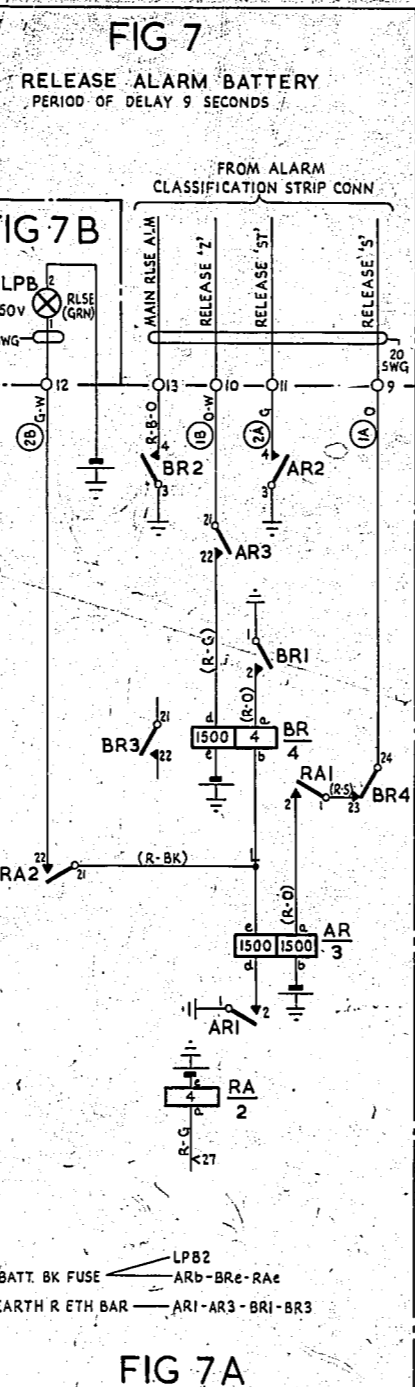
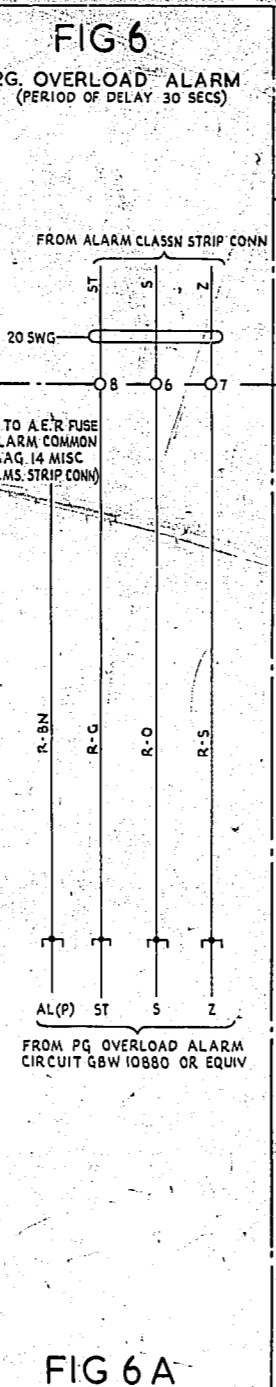
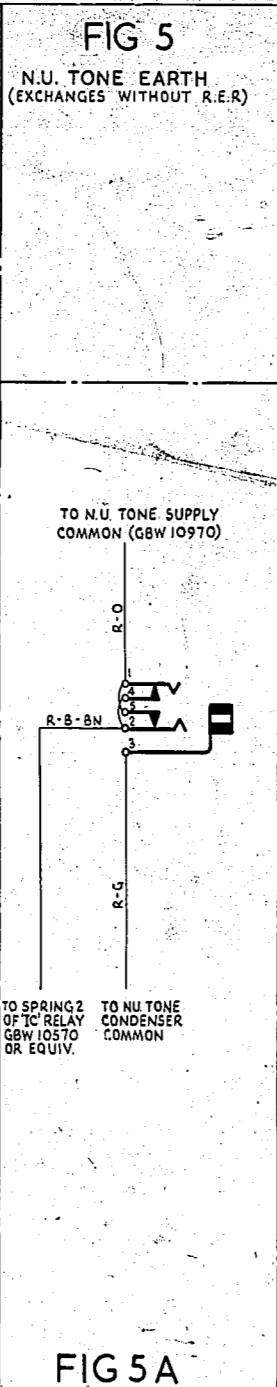
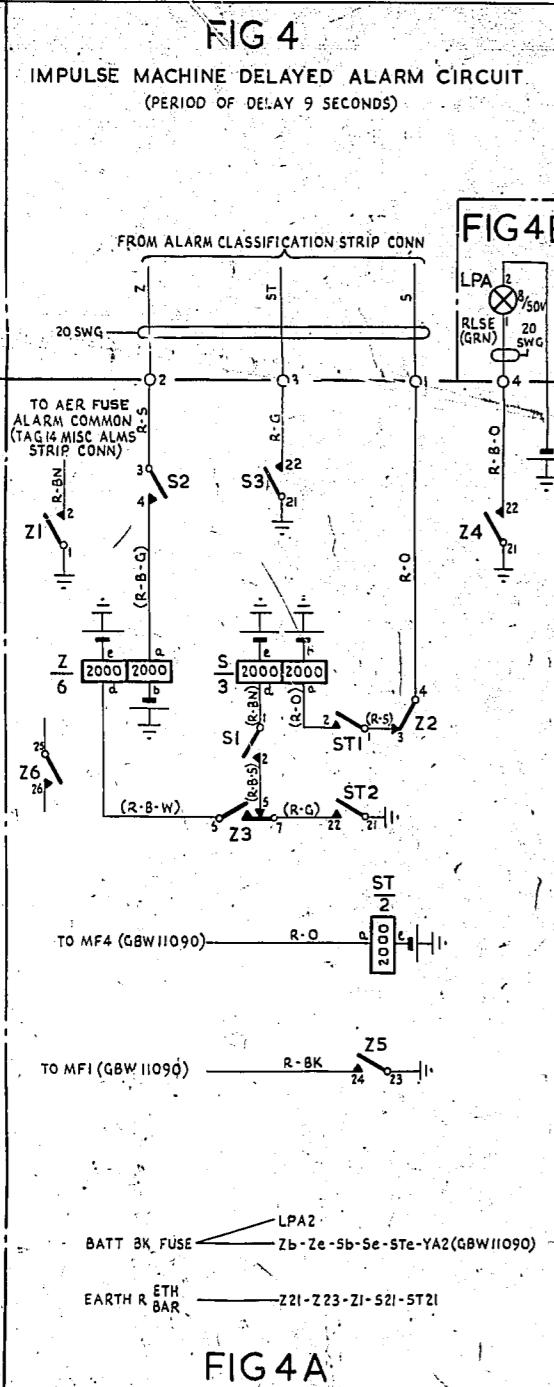


0
5 Centimetres
10
15
20
25
30

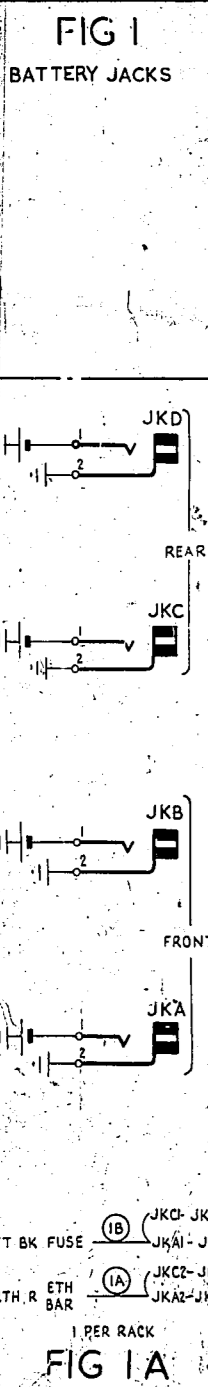

NOTES

- FUSING: FIG 1A: 3-0A
FIGS 4A & 4B: 1-5A
FIGS 7A & 7B: 1-5A
- UNLESS OTHERWISE SPECIFIED ALL WIRING TO BE 22 SWG. PLATE WIRING TO BE 25 SWG.
- AT SOME EARLY EXCHANGES THE RINGING SHIELD LEAD WAS LEFT DISCONNECTED AT THE ISOLATION JACK AND THE RINGING LEAD FROM THE JACK TO THE EQUIPMENT WAS WIRED IN 'R-BN'.

MISCELLANEOUS CIRCUITS			
ALARM EQUIPMENT RACKS			
FIG. 15 & 15A ADD. (68264) 13A 1.8.75 B.S.H.			
FIGS 14 & 14A ADD. 20 SWG REFS. ADD. 70595 13 19-4-63 D.B.H.			
REDRAWN: FIGS 2 & 3 DELETED SH2 CANCELLED T2			
AMENDMENT PARTICULARS	ISSUE	DATE	APP'D
NZPO			SIZE L 50V E
DRAWN CHECKED WIRING			GBW 11060