


**FIG. 1 TEST POSITION**  
1 PER POSITION PER TEST SELR.

**FIG. 2A M.A.R.**  
1 PER TEST SELECTOR

TRANS. TEST (KTT) + RELEASE (KR)	2
(PART ORG. GBW 10610)	2
STEP (KS) + PRIVATE CONTROL (KPC)	2
2	2
HOLD & TEST (KHT)	4

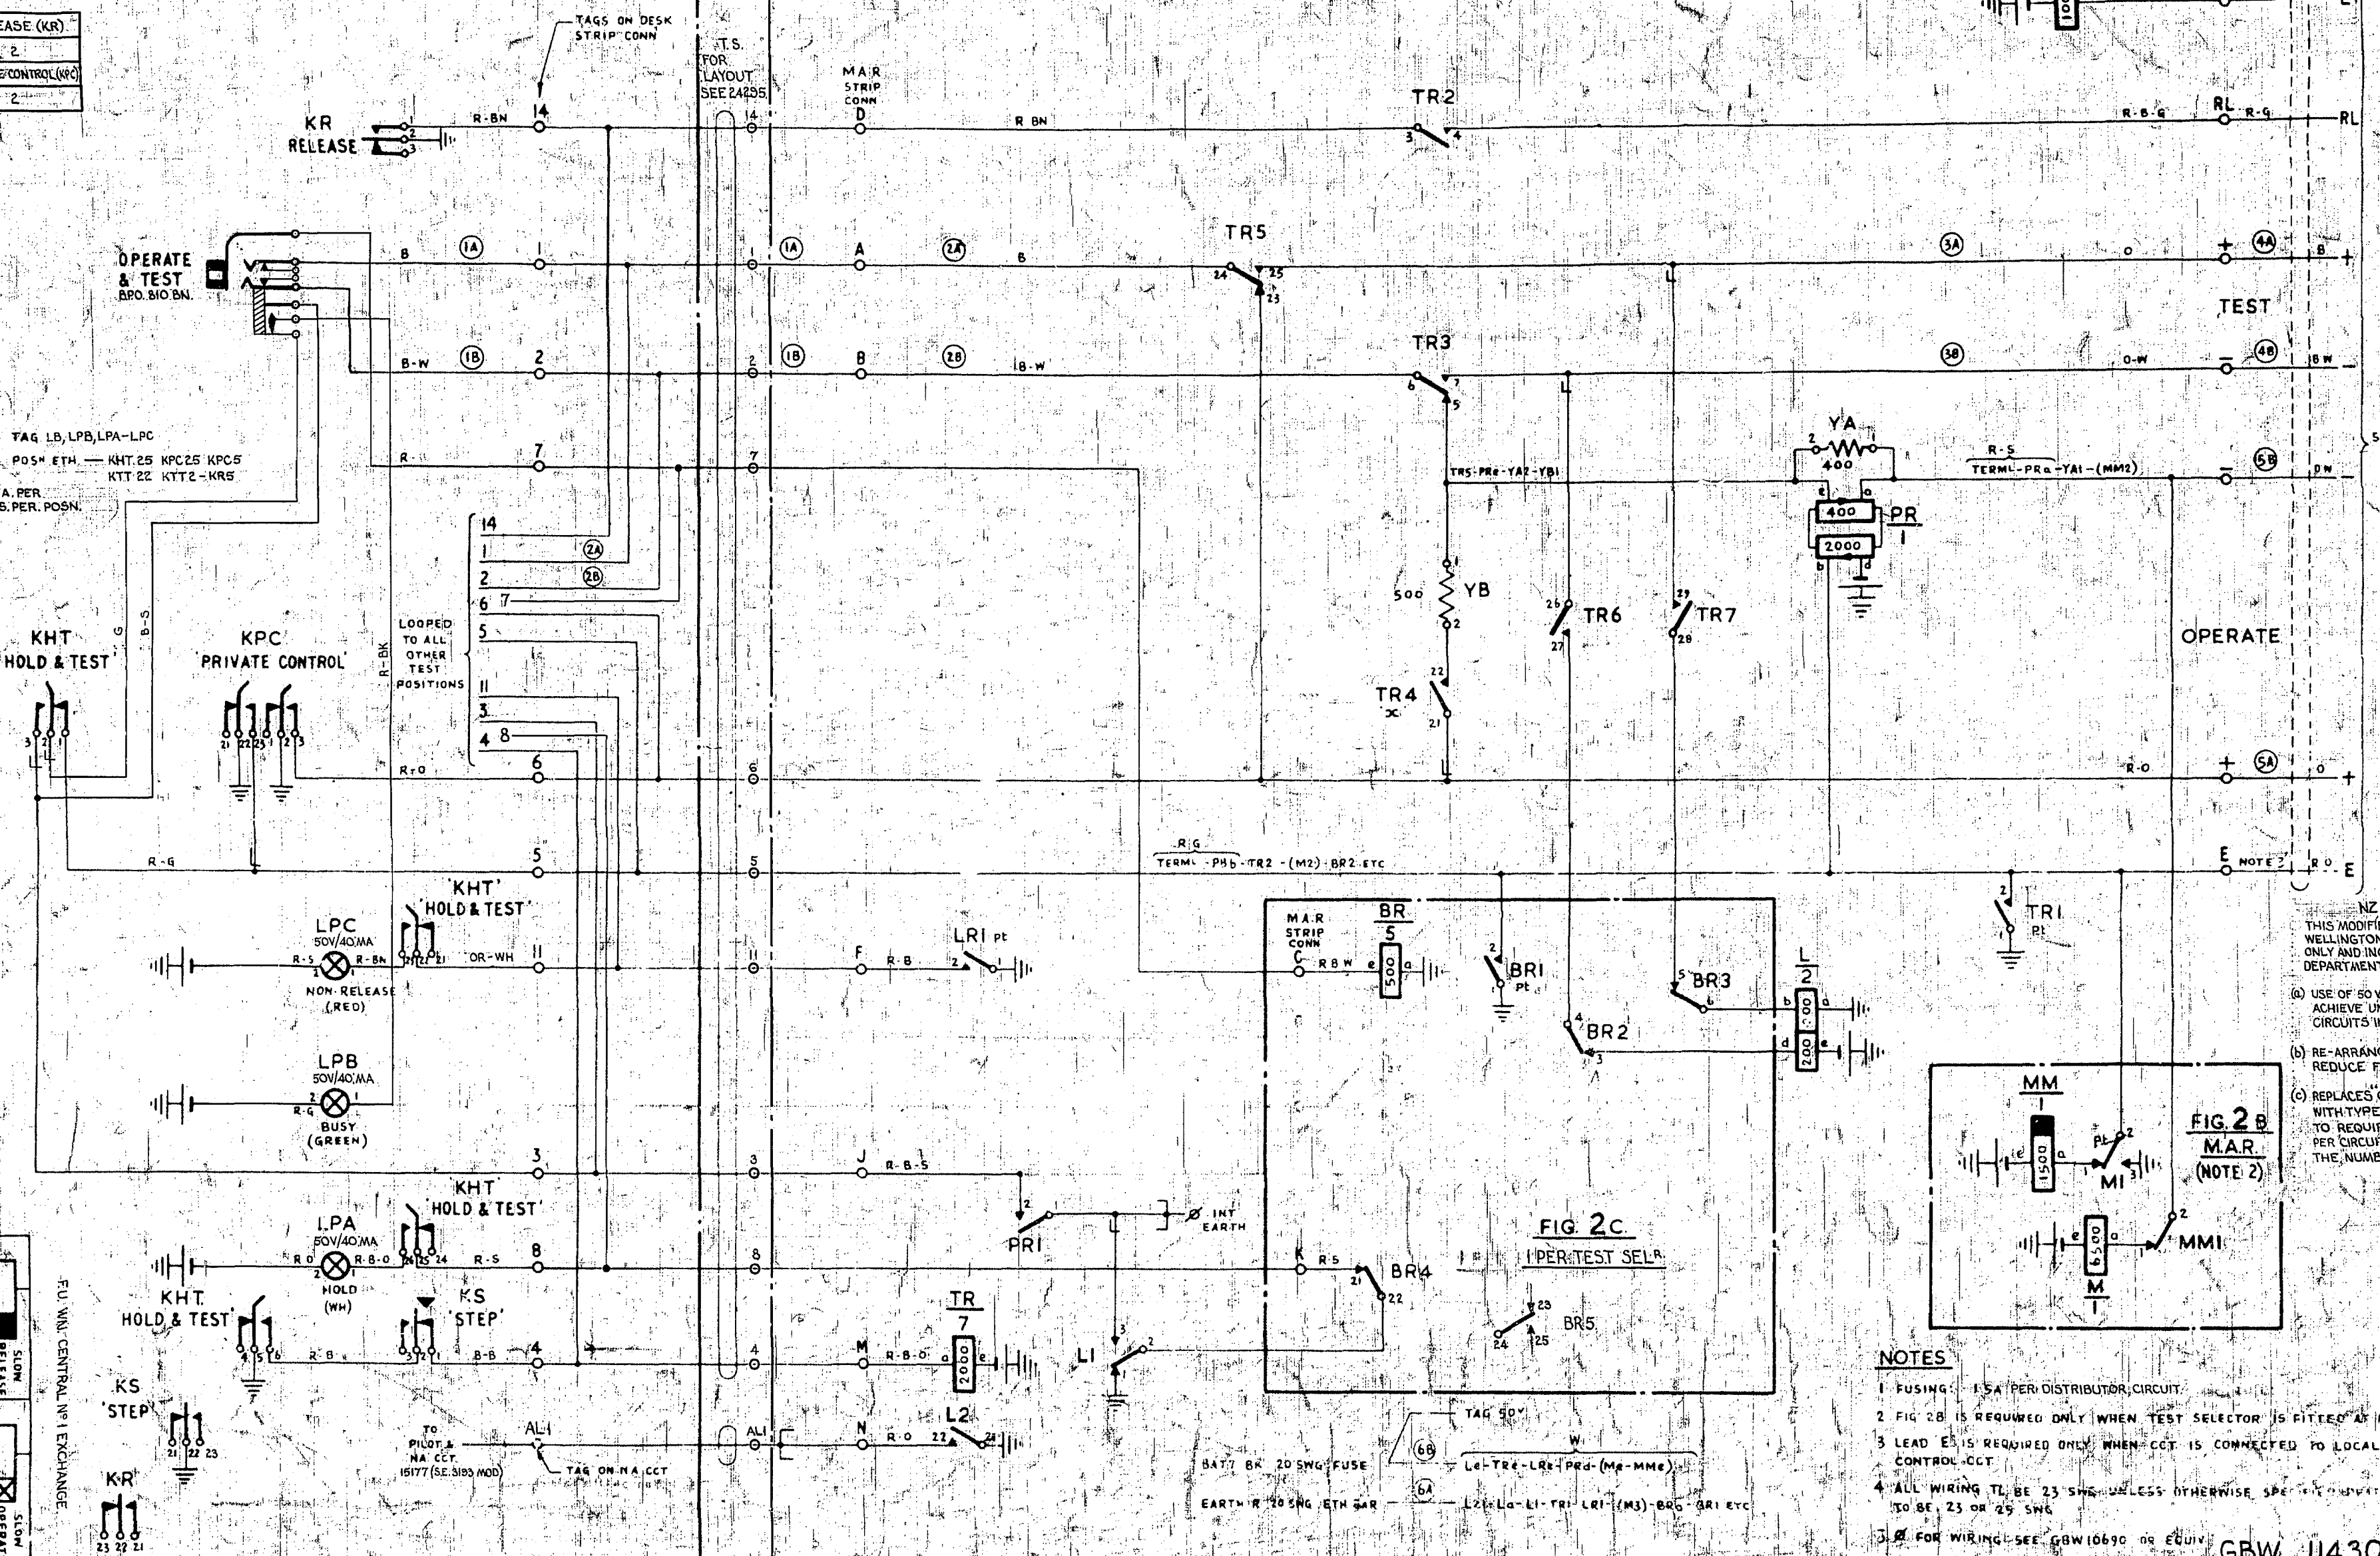

NZ P.O.	CANCELLED (21888)	DROUGHT WITH ACTUAL EQUIPMENT SPEC'S 30/14/80	NZ NOTE A ADDED	ISSUE DATE	23/4/49
				AMENDMENT PARTICULARS	
				DESIGNED	
				CHECKED	
WIRING					
ENGINERS					
GBW 11430 MOD. B	LINES TO TEST SELECTOR				
	TEST DESK				
	RELEASE				
	OPERATE				

TO TEST SELECTOR DIRECT OR VIA I.D.F. LOCAL (WHEN SPECIFIED) OR TO SWITCHING CONTROL CIRCUIT OR TO JUNC. TO REMOVE EXCH VIA MISC. M.O.E. PROTECTORS DIRECT OR VIA I.D.F. LOCAL (WHEN SPECIFIED)

NZ NOTE A  
THIS MODIFIED CIRCUIT APPLIES AT WELLINGTON CENTRAL EXCHANGE ONLY AND INCLUDES THE FOLLOWING DEPARTMENTS FROM GBW 11430:-

- (a) USE OF 50 VOLT LAMPS SO AS TO ACHIEVE UNIFORMITY WITH OTHER CIRCUITS IN THE WE TEST DESK.
- (b) RE-ARRANGES TEST KEYS TO REDUCE FROM 4 TO 3.
- (c) REPLACES OPERATE TEST JACK WITH TYPE BPO 810 BN SO AS TO REQUIRE ONLY 1 BR RELAY PER CIRCUIT REGARDLESS OF THE NUMBER OF APPEARANCES.

**NOTES**

- 1 FUSING: 1.5A PER DISTRIBUTOR CIRCUIT
- 2 FIG. 2B IS REQUIRED ONLY WHEN TEST SELECTOR IS FITTED AT REMOTE EXCH
- 3 LEAD E IS REQUIRED ONLY WHEN CCT IS CONNECTED TO LOCAL SWITCHING CONTROL CCT
- 4 ALL WIRING TO BE 23 SWG UNLESS OTHERWISE SPECIFIED OR W/IT STRAPPING TO BE 23 OR 25 SWG
- 5 FOR WIRING SEE GBW 10690 OR EQUIV.