

N.Z.P.O.	DESIGNED	CHECKED	WIRING	FOR	RECORD
	DATE	DATE	DATE	DATE	DATE
	BY	BY	BY	BY	BY
	BY	BY	BY	BY	BY
GBW 11910	AMENDMENT PARTICULARS	ISSUE	DATE	APPD.	REF.
	1	6.5.53	6/4/54		
	2	3.3.54	2/4/54		
	3	3.3.54	2/4/54		
INTERWORKING REGISTER TEST SET					
SXS TO ROTARY TYPE SR4					
7A AND 7A2 HUNTING CONTROL					
SIZE M 50V					

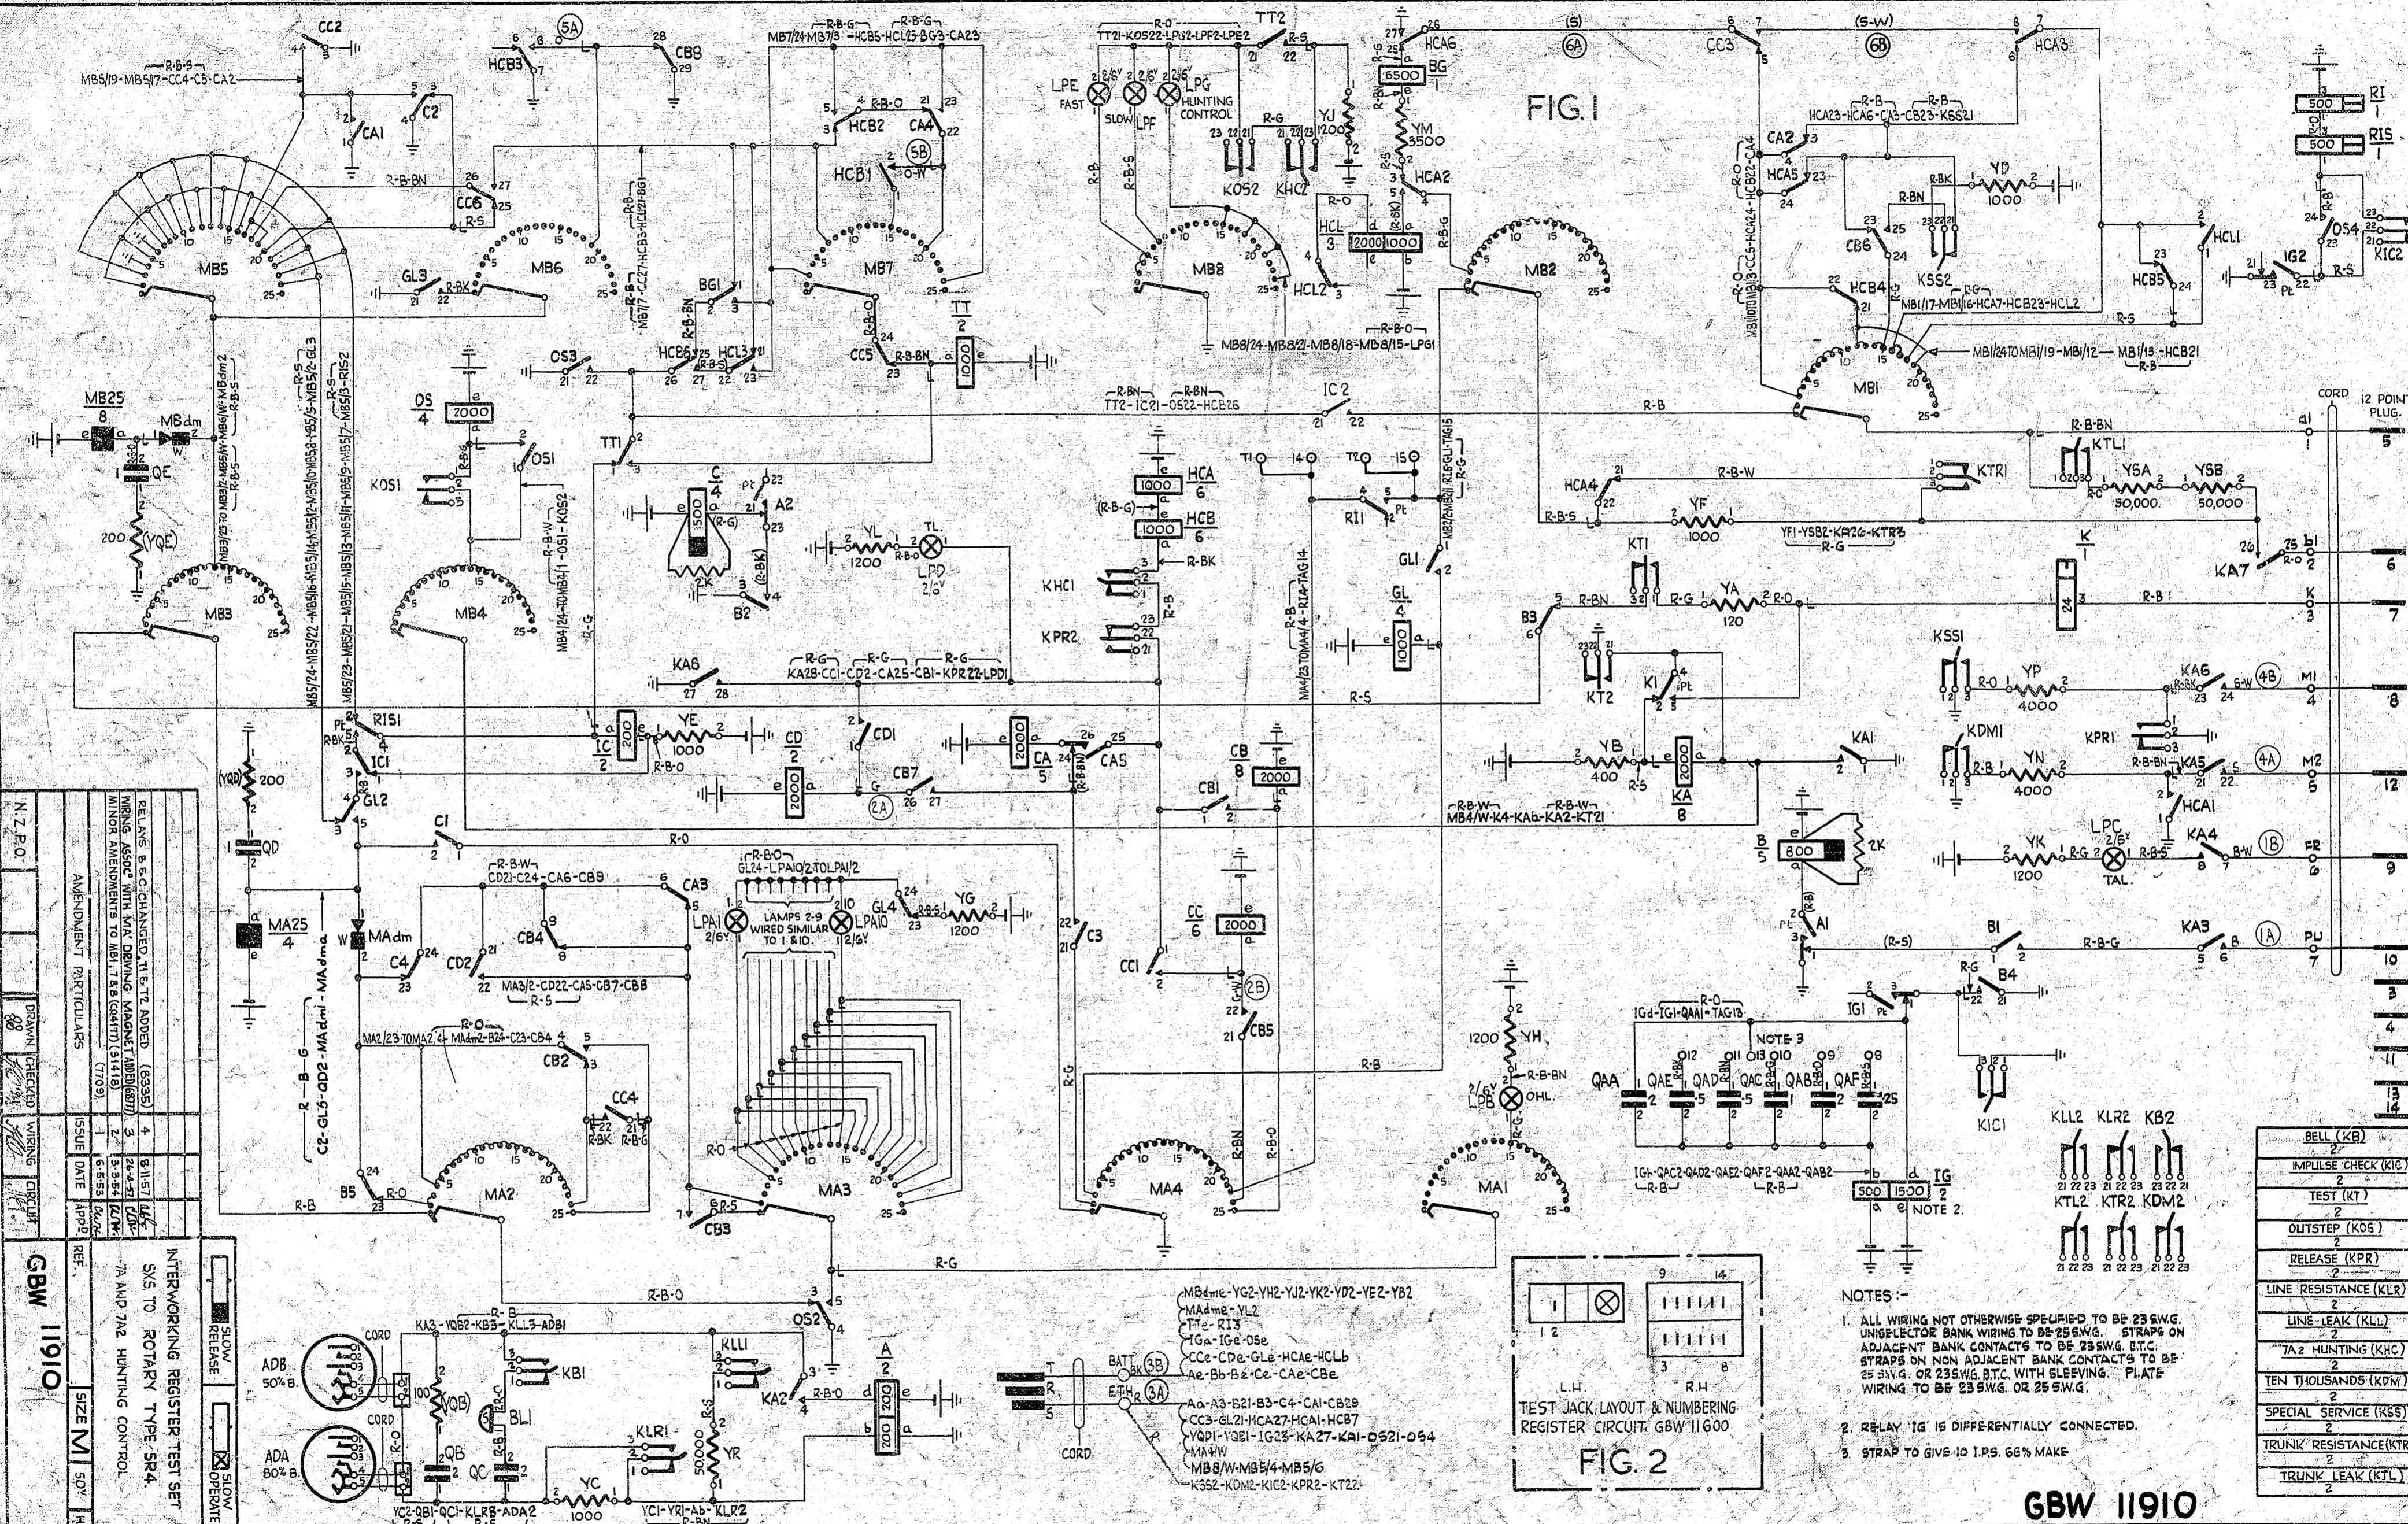


FIG. 1

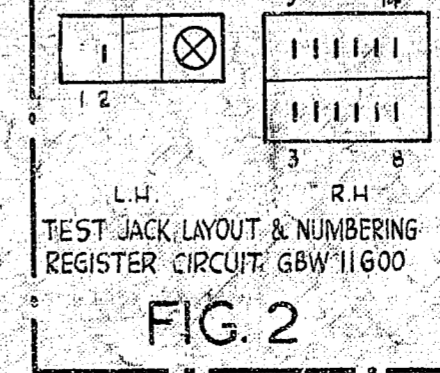


FIG. 2

- NOTES:-
- ALL WIRING NOT OTHERWISE SPECIFIED TO BE 23 SWG. UNISPECTOR BANK WIRING TO BE 25 SWG. STRAPS ON ADJACENT BANK CONTACTS TO BE 23 SWG. B.T.C. STRAPS ON NON ADJACENT BANK CONTACTS TO BE 25 SWG. OR 23 SWG. B.T.C. WITH BLEEDING PLATE WIRING TO BE 23 SWG. OR 25 SWG.
 - RELAY IG IS DIFFERENTIALLY CONNECTED.
 - STRAP TO GIVE 10 I.P.S. 66% MAKE

BELL (KB)	2
IMPULSE CHECK (KIC)	2
TEST (KT)	2
OUTSTEP (KOS)	2
RELEASE (KPR)	2
LINE RESISTANCE (KLR)	2
LINE LEAK (KLL)	2
7A2 HUNTING (KHC)	2
TEN THOUSANDS (KDW)	2
SPECIAL SERVICE (KSS)	2
TRUNK RESISTANCE (KTR)	2
TRUNK LEAK (KTL)	2