



MANUAL BOARD
(EXPLANATORY ONLY)

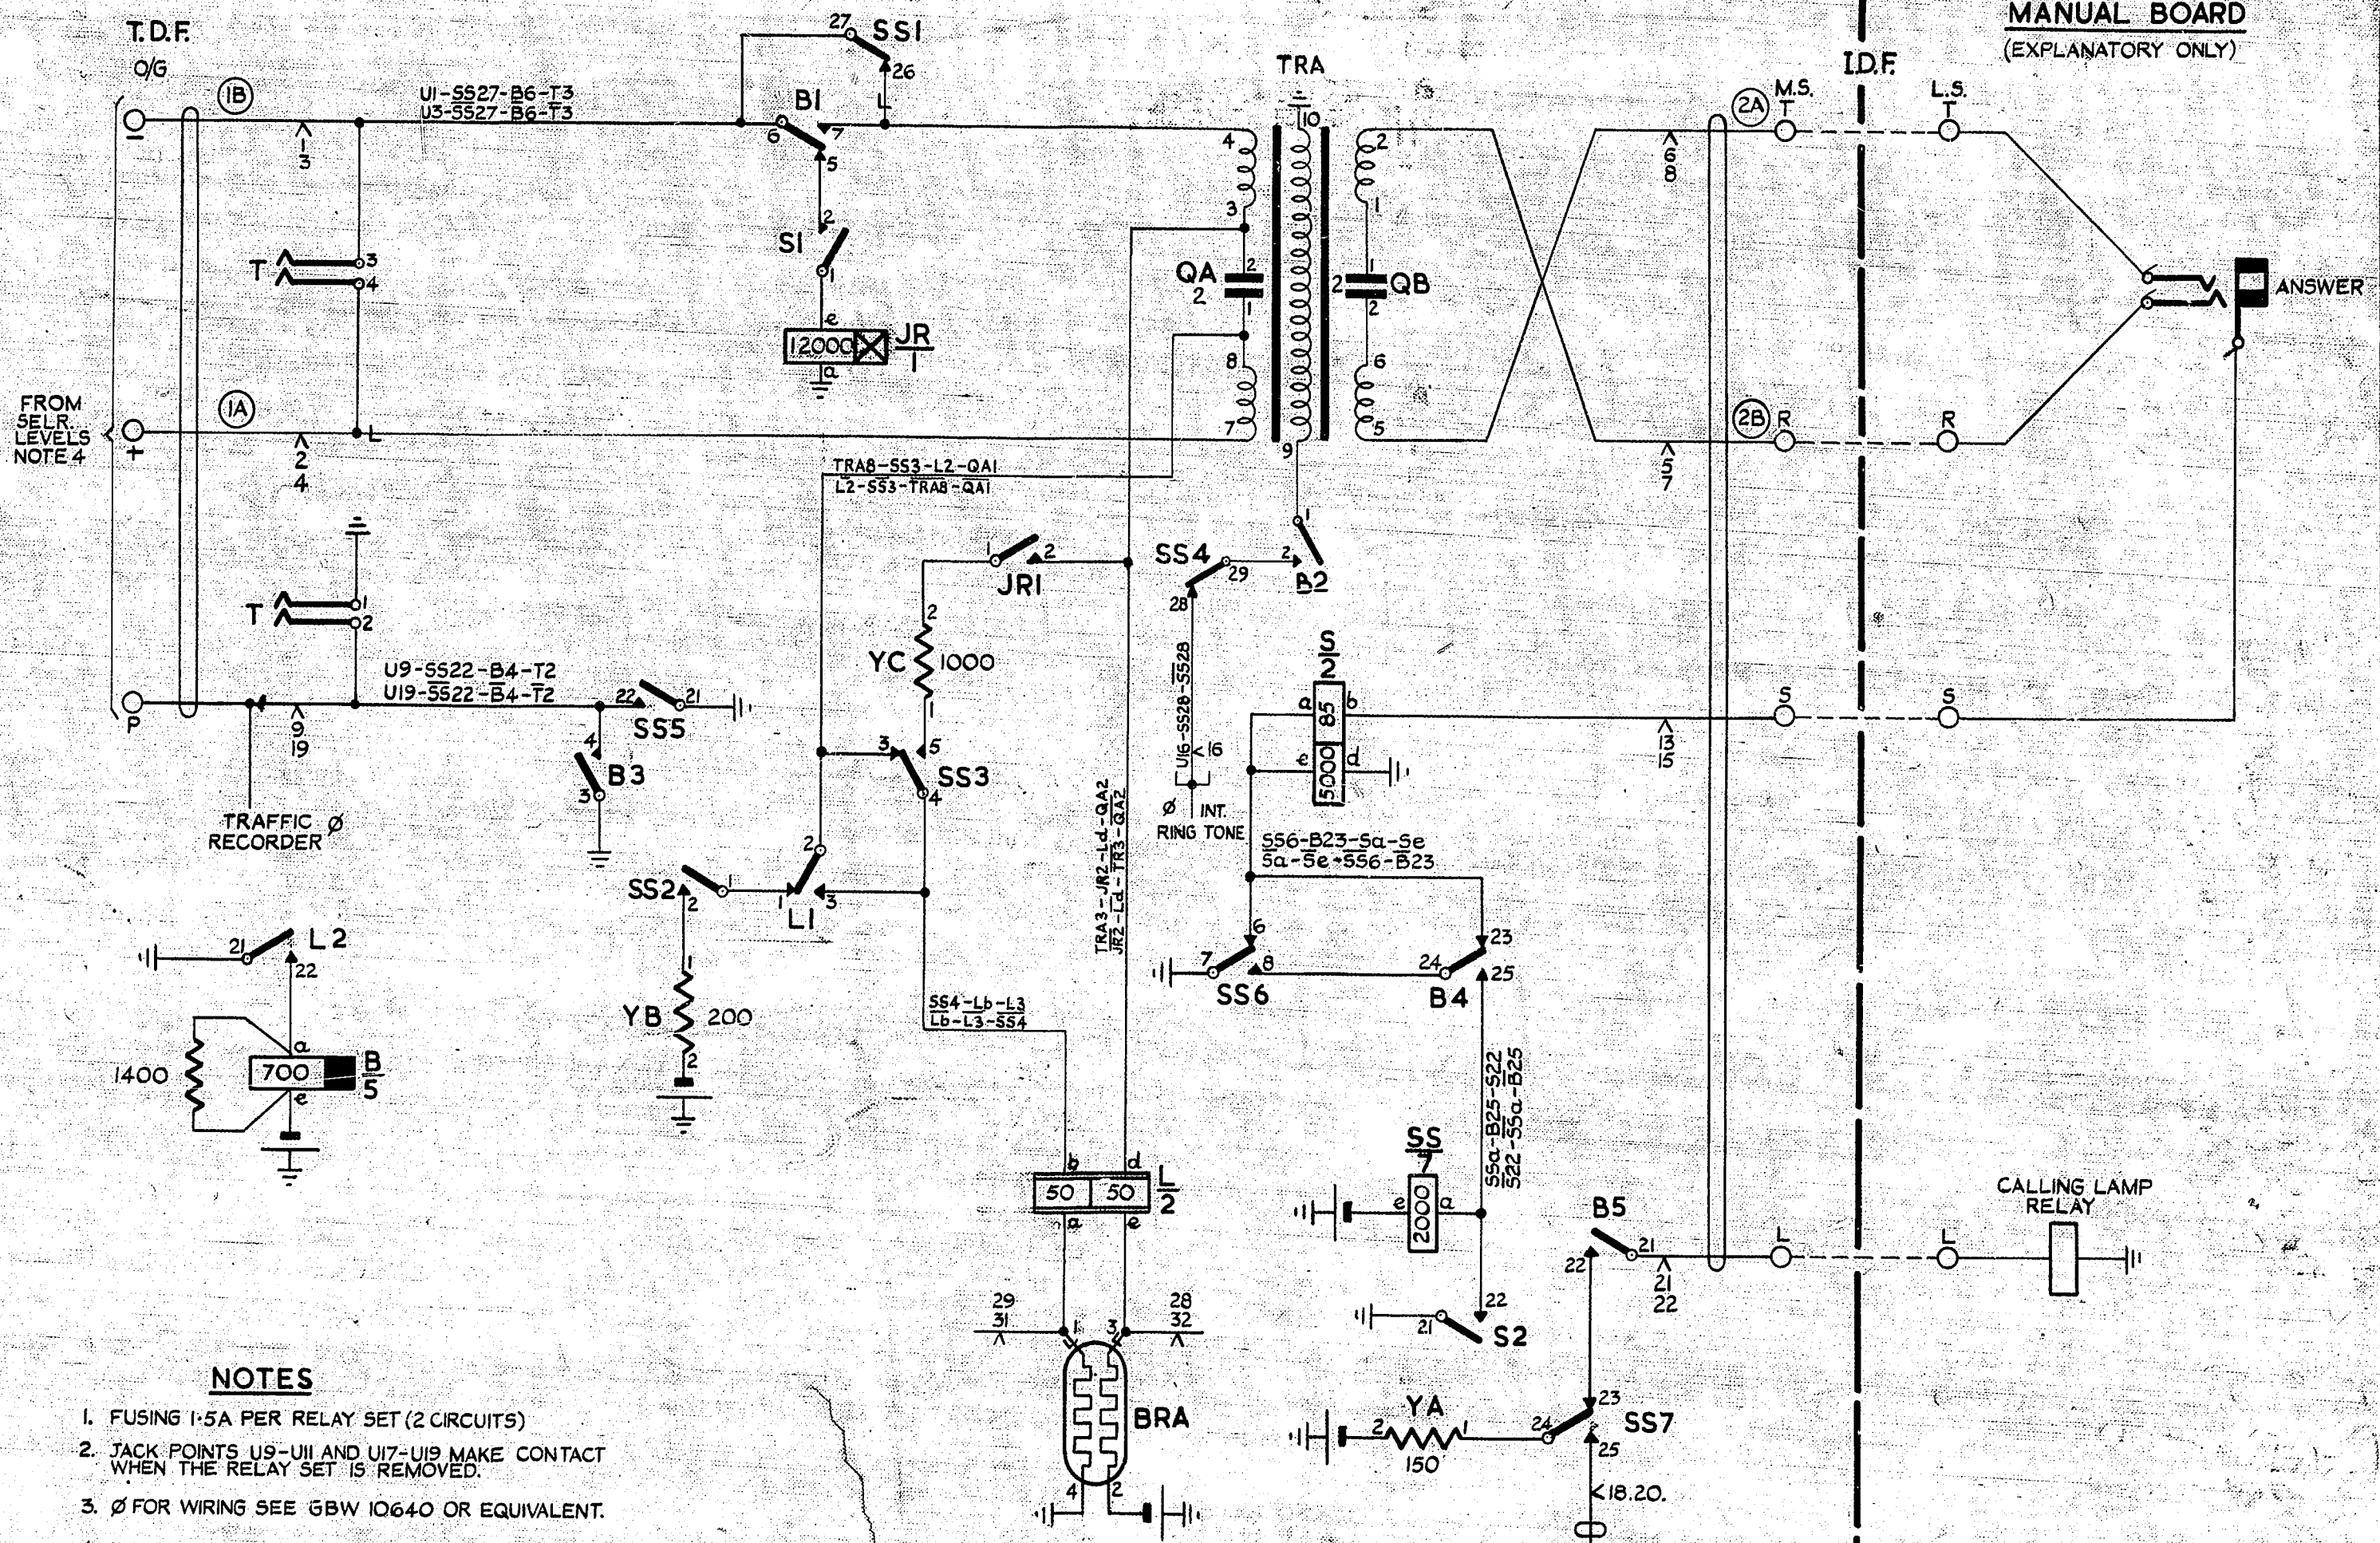

NOTES

1. FUSING 1.5A PER RELAY SET (2 CIRCUITS)
2. JACK POINTS U9-U11 AND U17-U19 MAKE CONTACT WHEN THE RELAY SET IS REMOVED.
3. Ø FOR WIRING SEE GBW 10640 OR EQUIVALENT.
4. WHEN FULL AVAILABILITY FROM SELECTOR LEVELS IS SPECIFIED, INCOMING LEADS ARE CABLED DIRECT FROM BANK MULT. STRIP CONN. AND NOT VIA T.D.F.

ETH. ETH.BAR (R) 20 S.W.G. (3A) U11-U17
 BATT. FUSE (BK) 20 S.W.G. (3B) U12
 ETH. (R) U11-TRA10-JRα-SS21-SS7-B3-S21-Sd-TRA-L21-SS21-SS7-T
 B3-S21-Sd-L21-TRA10-BRA4-BRA4-T1-T1.
 BATT. (W) U12-SSe-BE-SSe-BE-BRA2-BRA2-YA2-YB2-YB2.



AMENDMENT PARTICULARS		ISSUE	DATE	APPD
		(7912)	1	17-7-53 CWH
NZPO	DRAWN B.M.R.	CHECKED	WIRING	CIRCUIT

SLOW RELEASE SLOW OPERATE
SELECTOR LEVEL RELAY SET
INCOMING TO RURAL POS^N
(SLEEVE CONTROL MAN. BD)
2000 TYPE EQUIPMENT
 SIZE S 50V S
GBW 12020

