


- NOTES:**
1. FUSING 1.5A PER CIRCUIT.
  2. U POINTS 9 & 11 TO MAKE WHEN RELAY SET IS REMOVED.
  3. Ø FOR WIRING SEE GBW 10640 OR EQUIV.
  4. WHEN FULL AVAILABILITY FROM SELECTOR LEVELS IS SPECIFIED INCOMING LEADS ARE CABLED DIRECT FROM BANK MULT STRIP CONN. AND NOT VIA T.D.F.

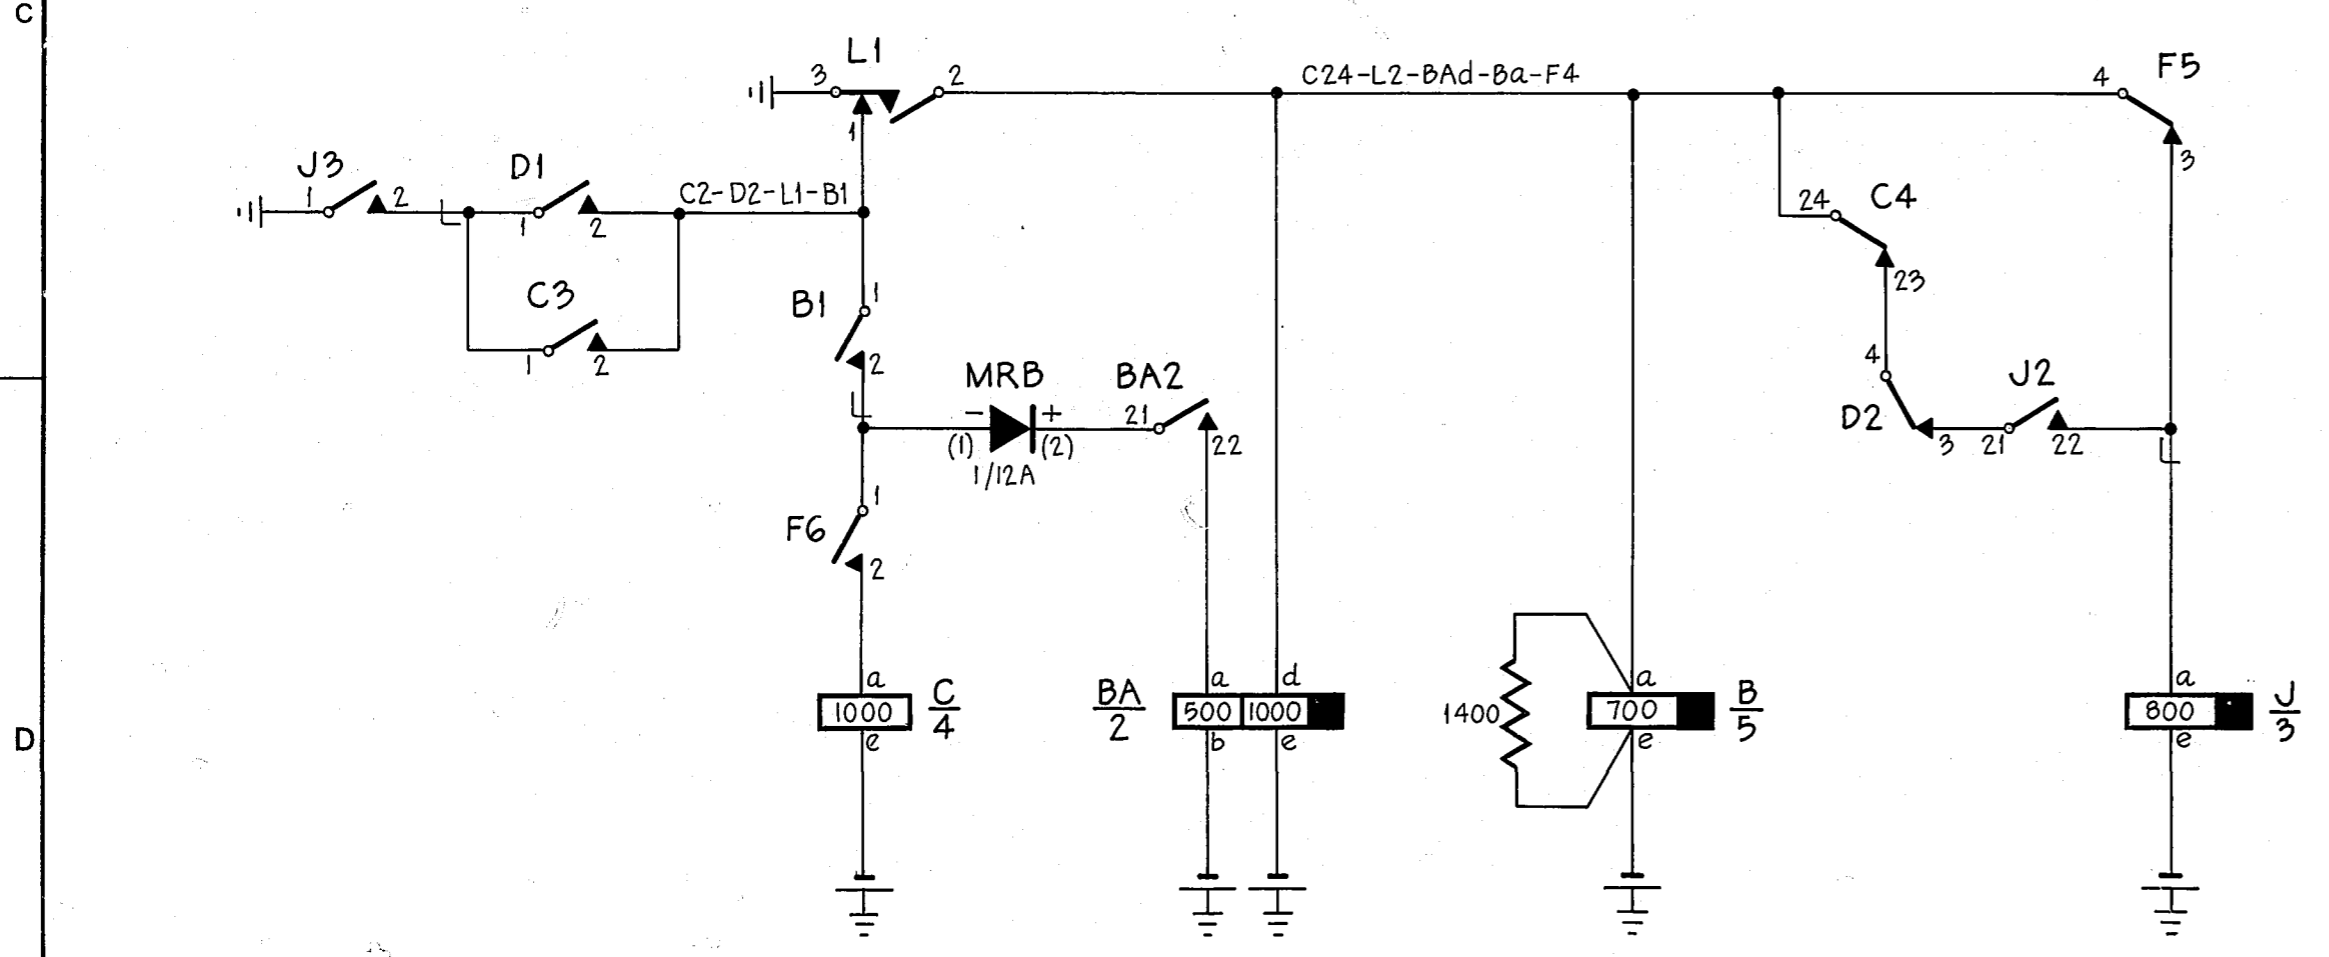

ETH. ETH. BAR 0.9mm. R 3A U11  
 BATT. FUSE 0.9mm. 3B U12  
 ETH. (R) U11-C3-J1-J3-Lb-L3-MRA1-BA1-B21-  
 BRB4-T1  
 BATT. (W) U12-Ce-Je-BAb-BAe-Be-BRB2-BRA2-  
 YC2  
 POS. BATT. (R-B) U15-YA2

**PHONOGRAM  
 RELAY SET  
 2000 TYPE  
 EQUIPMENT**

ISS DATE	DEL DC ORDER	CKD APD	CHANGE
DRN: 9.9	CKD: LJO	ORIGIN 9.9	
TCD: BMR	APPD: CWH	STANDARD: ATW 22001	
NZPO ENGINEER-IN-CHIEF, WELLINGTON			
SHT 1 OF 1		GRW 12050	
SIZE A2			



UD 236

