



POSITION OR END-SECTION

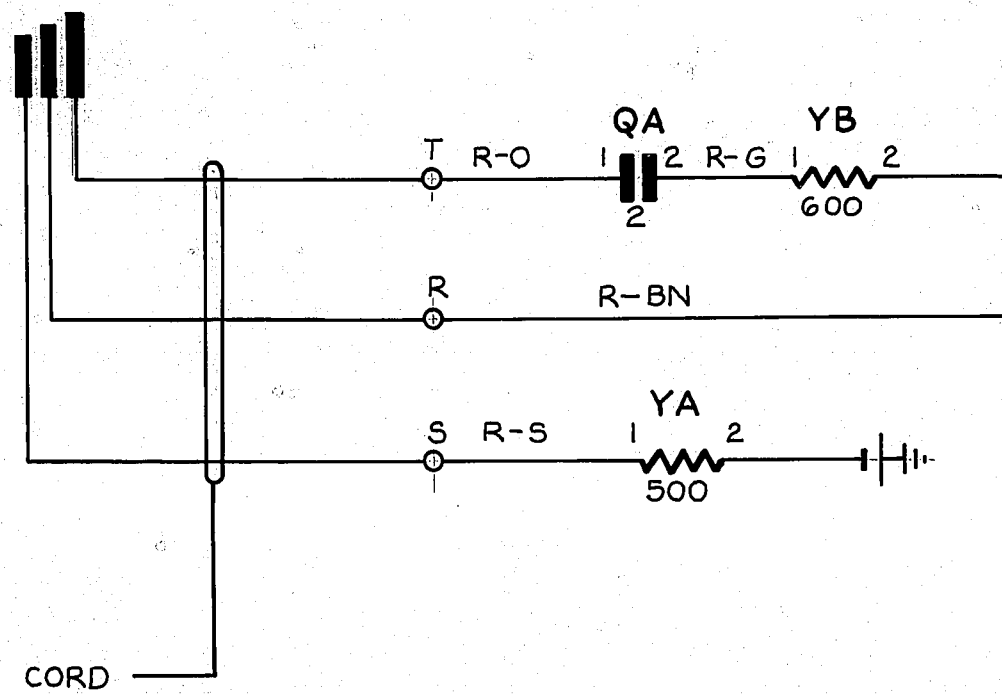

NOTES:

1. FUSE:- 1.5A PER 5CCTS.
2. ALL WIRING UNLESS OTHERWISE SPECIFIED TO BE 0.6mm.

BATT. FUSE ON POSN. OR IN POSN. ADJ TO END-SECTN. WHEN REQD



PROOF

2A	28.380	A.G.	17051				RETRACED
2	3.2.67		58277				BATT. RUN REVISED
ISS	DATE	DEL	DC	ORDER	CKD	APPD	CHANGE

SLEEVE CONTROL SYSTEM
PLUGGING UP CORD
2000 TYPE

50V	H	<input type="checkbox"/> SLOW RELEASE	<input checked="" type="checkbox"/> SLOW OPERATE
DRNT. EQPT	CKD	ORIGIN T. EQPT	
TCD A.G.	APPD	STANDARD: ATW 22001	
NZPO ENGINEER-IN-CHIEF, WELLINGTON			
	SHT 1 OF 1	GBW 12860	
SIZE A3			

UD 235

