
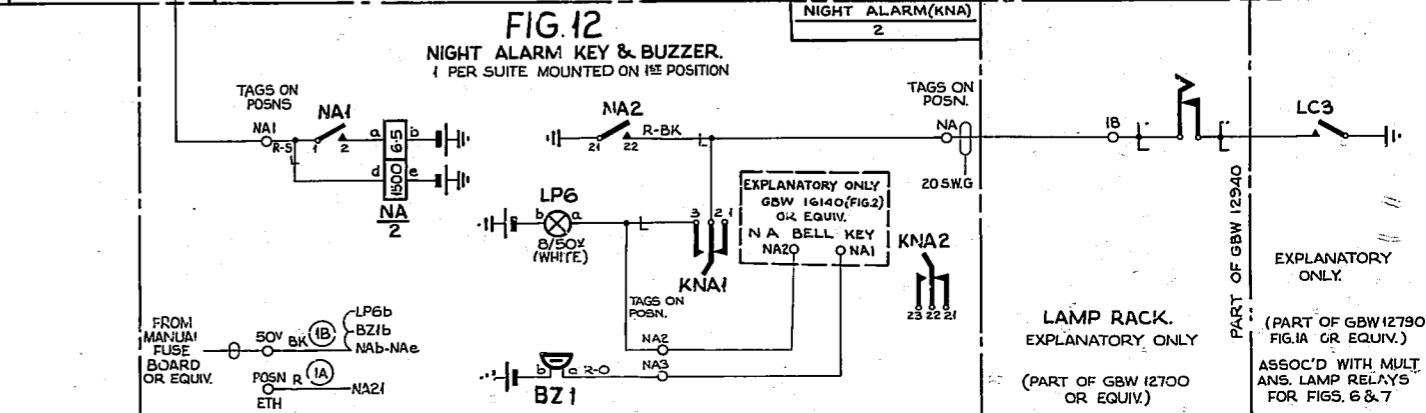


NOTES

- FUSE: FIG. 1: 1.5A PER CIRCUIT. FIG. 2: 1.5A PER CIRCUIT. FIG. 3: 1.5A PER CIRCUIT. FIG. 4: 1.5A PER CIRCUIT. FIG. 5: 1.5A PER CIRCUIT. FIG. 6: 1.5A PER CIRCUIT. FIG. 7: 1.5A PER CIRCUIT. FIG. 8: 1.5A PER CIRCUIT. FIG. 9: 1.5A PER CIRCUIT. FIG. 10: 1.5A PER CIRCUIT. FIG. 11: 1.5A PER CIRCUIT.
- ALL WIRING TO BE 25 SWG UNLESS OTHERWISE SPECIFIED.
- TO EVEN CIRCUIT WIRE SIMILAR TO ODD CIRCUITS.
- FOR WIRING OF THIS PORTION OF THE KEY SEE GBW 12900 FIG. 6 OR GBW 10690 FIG. 3 OR EQUIV.
- Ø FOR WIRING SEE GBW 10690 OR EQUIV.
- FIG. 1C TO BE USED FOR NEW WORK. FIG. 1B TO BE USED FOR RETROSPECTIVE CHANGE.

ON EARLIER EQUIPMENT RESISTORS R4, 5 & 6 WERE 12K N912 TYPE.

PRIOR TO ISSUE II CABLING WAS VIA TAGS ON DIRECTORY SERVICE DESK.

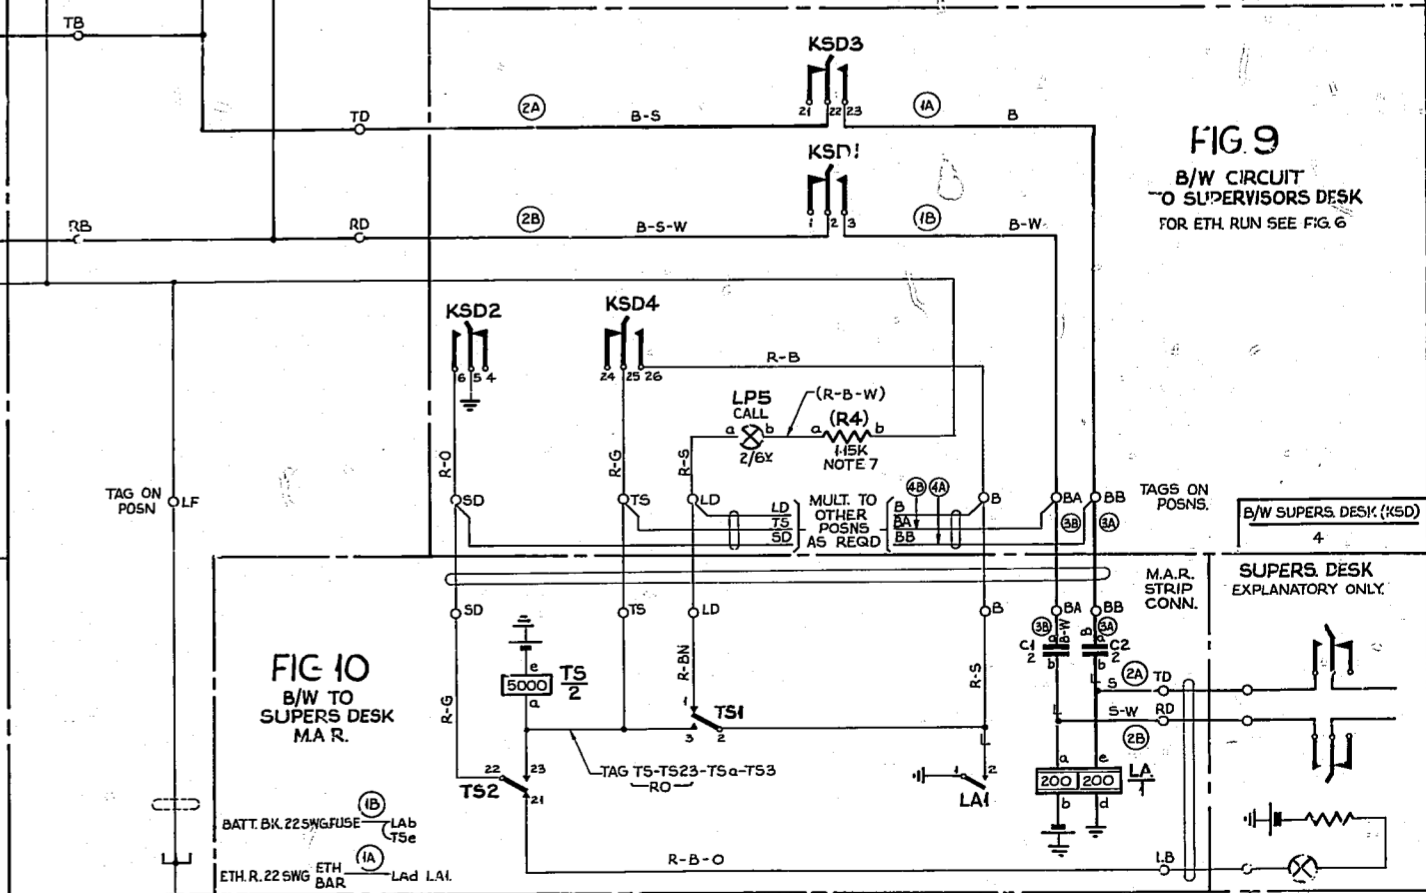

REVISIONS

NO.	DATE	DESCRIPTION
1	10-1-58	ISSUE
2	10-1-58	ISSUE
3	10-1-58	ISSUE
4	10-1-58	ISSUE
5	10-1-58	ISSUE
6	10-1-58	ISSUE
7	10-1-58	ISSUE
8	10-1-58	ISSUE
9	10-1-58	ISSUE
10	10-1-58	ISSUE
11	10-1-58	ISSUE
12	10-1-58	ISSUE
13	10-1-58	ISSUE
14	10-1-58	ISSUE
15	10-1-58	ISSUE
16	10-1-58	ISSUE
17	10-1-58	ISSUE
18	10-1-58	ISSUE
19	10-1-58	ISSUE
20	10-1-58	ISSUE

REVISIONS

NO.	DATE	DESCRIPTION
1	10-1-58	ISSUE
2	10-1-58	ISSUE
3	10-1-58	ISSUE
4	10-1-58	ISSUE
5	10-1-58	ISSUE
6	10-1-58	ISSUE
7	10-1-58	ISSUE
8	10-1-58	ISSUE
9	10-1-58	ISSUE
10	10-1-58	ISSUE
11	10-1-58	ISSUE
12	10-1-58	ISSUE
13	10-1-58	ISSUE
14	10-1-58	ISSUE
15	10-1-58	ISSUE
16	10-1-58	ISSUE
17	10-1-58	ISSUE
18	10-1-58	ISSUE
19	10-1-58	ISSUE
20	10-1-58	ISSUE