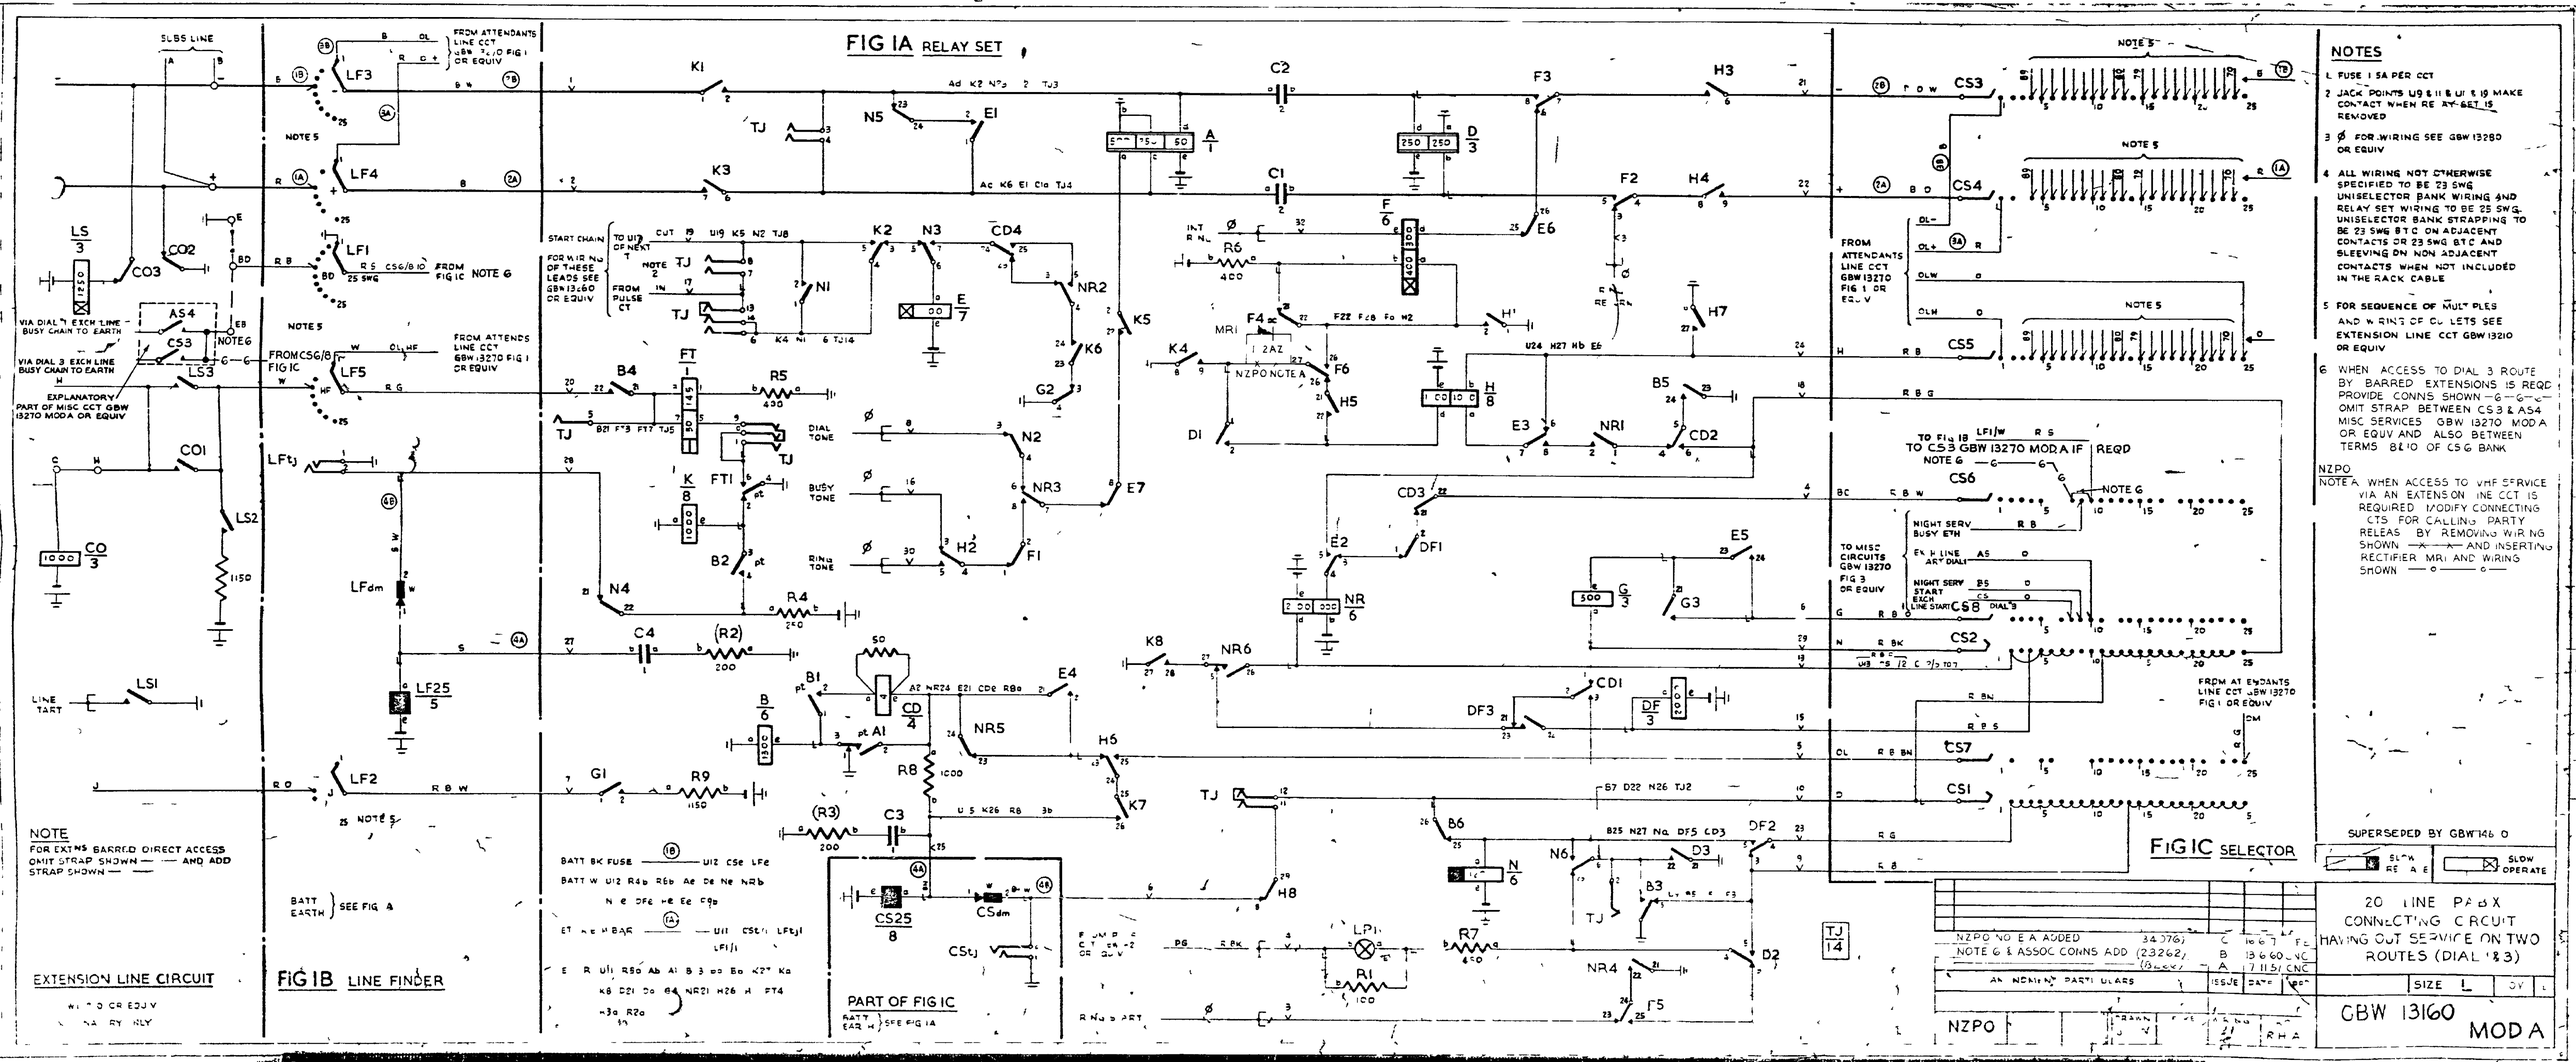
FIG 1A RELAY SET
FIG 1B LINE FINDER
FIG 1C SELECTOR
EXTENSION LINE CIRCUIT
PART OF FIG 1C
NOTES
1 FUSE 1 5A PER CCT
2 JACK POINTS U9 & 11 & U1 & 19 MAKE CONTACT WHEN RELAY SET IS REMOVED
3 Ø FOR WIRING SEE GBW 13280 OR EQUIV
4 ALL WIRING NOT OTHERWISE SPECIFIED TO BE 23 SWG UNISELECTOR BANK WIRING AND RELAY SET WIRING TO BE 25 SWG. UNISELECTOR BANK STRAPPING TO BE 23 SWG BTC ON ADJACENT CONTACTS OR 23 SWG BTC AND SLEEVING ON NON ADJACENT CONTACTS WHEN NOT INCLUDED IN THE RACK CABLE
5 FOR SEQUENCE OF MULTIPLES AND WIRING OF CLOSETS SEE EXTENSION LINE CCT GBW 13210 OR EQUIV
6 WHEN ACCESS TO DIAL 3 ROUTE BY BARRED EXTENSIONS IS REQD PROVIDE CONNS SHOWN —G—G— OMIT STRAP BETWEEN CS3 & AS4 MISC SERVICES GBW 13270 MOD A OR EQUV AND ALSO BETWEEN TERMS 8 & 10 OF CS6 BANK
NZPO
NOTE A WHEN ACCESS TO VHF SERVICE VIA AN EXTENSION LINE CCT IS REQUIRED MODIFY CONNECTING CTS FOR CALLING PARTY RELEASE BY REMOVING WIRING SHOWN —x— AND INSERTING RECTIFIER MR1 AND WIRING SHOWN —o— o—
SUPERSEDED BY GBW 14600
SLOW RELEASE
SLOW OPERATE
20 LINE PABX CONNECTING CIRCUIT HAVING OUT SERVICE ON TWO ROUTES (DIAL 1 & 3)
GBW 13160 MOD A
NZPO
SIZE L