

TO ROUTINE TEST JACK ON RALM

TO SELECTOR OR RELAY SET UNDER TEST


NOTE
ALL WIRING TO BE 23 SW G UNLESS OTHERWISE STATED

BATT BK SCA10 --- R4b R6 RB K7b R5b R3b K2b
ETH R SCA11 --- R4a R3a KEB5 KEQ2

WIRING SIDE

GUIDE			
1	3	2	4
5	7	6	8
9	11	10	12
13	15	14	16
17	19	18	20
21	23	22	24

BPO 2403 PLUG

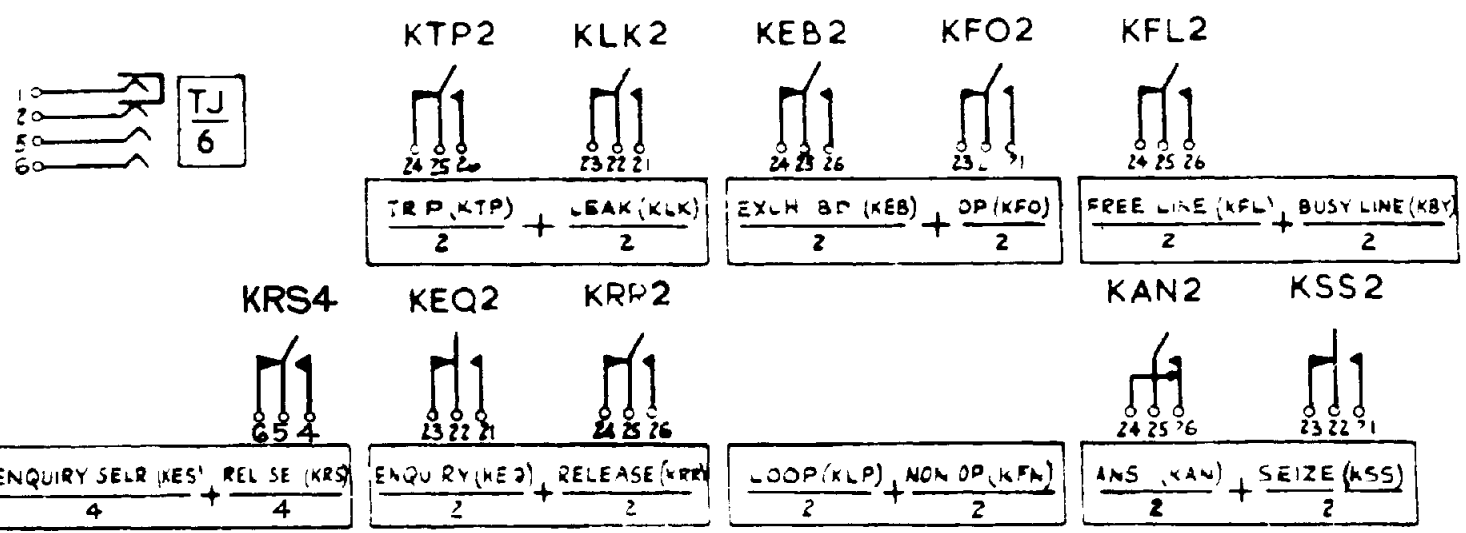

KES1 3 NUMBERING AND KES4 WAS SPARE KRS3 & 4 ADD (12209)	5	19	10	73	GFE
PLUG POINTS 14 & 16 REVERSED (66016)	4	18	11	55	
N°2 & 28 GONGS DEL. RD	3	10	8	55	
ROUTING & DESIGNATION AMENDMENTS	2				
AMENDMENT PARTICULARS	1				
SS E DATE					

ROUTINE TEST SET
20 & 35/49 LINE
P A B X

SIZE **S** 50V

GBW 13290

NZPO