


- NOTES :-**
1. FUSING - 1.0A PER CCT.
 2. Ø FOR WIRING SEE GBW 13730 OR EQUIV.
 3. UNLESS OTHERWISE INDICATED ALL TERMINALS ARE ON STRIP CONNEXION AT REAR AND ARE DESIGNATED SC IN WIRING RUNS.
 4. ALL WIRE TO BE 25 S.W.G. UNLESS OTHERWISE SPECIFIED.
 5. DELETED.
 6. AT EXCHANGES WHICH PROVIDE FOR ONLY 2 PARTY LINES & DIAG GBW 13760 IS NOT FITTED USE CONNECTION SHOWN - 1-1-1 & OMIT - 2-2-2 OTHERWISE USE - 2-2-2 & OMIT - 1-1-1

N.Z. NOTE A -
 WHEN USED WITH REMOTE 'M' UNITS PROVIDE - 3-3- & OMIT - 4-4- AT OTHER INSTALLATIONS PROVIDE - 4-4- & OMIT - 3-3-

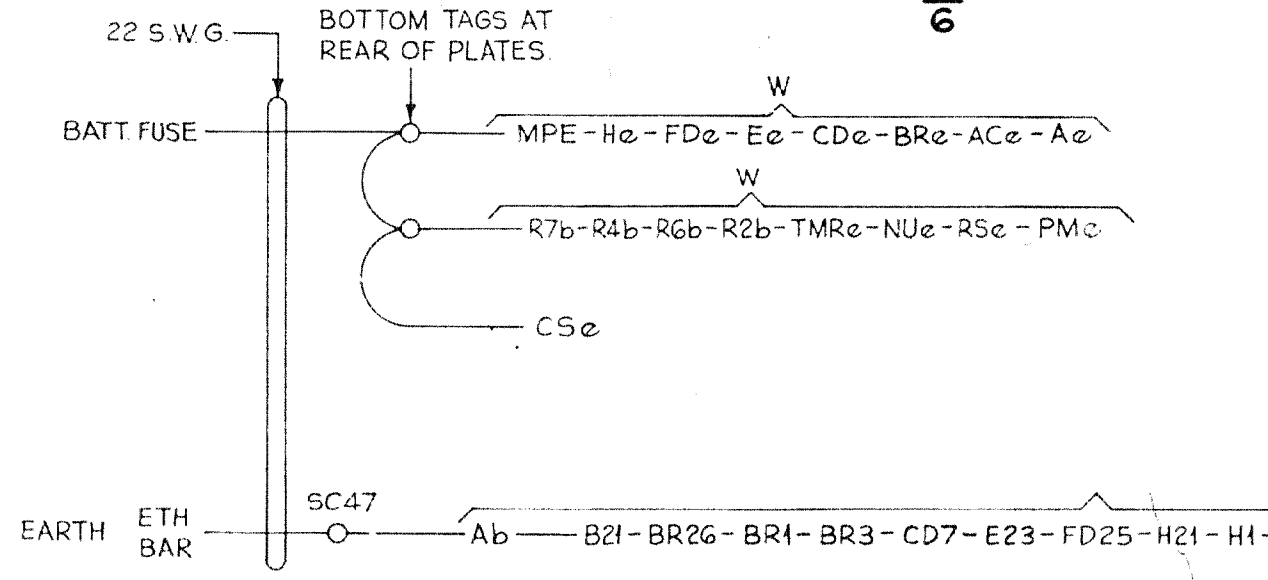

		SLOW RELEASE		SLOW OPERATION	
U.A.X. N.Z.13					
REVERTIVE CALL RELAY SET					
FOR 2 PARTY & 5 PARTY LINES					
(FOR USE WITH NEC LRS)					
MINOR AMENDMENTS TO (13-2437)	B	27.5.77	RSD		
PREPARED FROM GBW 13770 ISS. 9A (68204)	A	13.5.76	CJW		
AMENDMENT PARTICULARS		ISSUE DATE	APPR	SIZE: A1	50V C
NZPO				GBW 13770 MOD A	