


- NOTES:-
1. FUSE :- 1.5A PER CIRCUIT.
 2. RELAY OC IS CONNECTED DIFFERENTIALLY.
 3. LEVEL 1, CONTACT '1' TO BE MULTIPLIED & WIRED TO EARTH ON FINAL SEL. MULT. CONNECTION STRIP.
 4. Ø FOR WIRING SEE GBW 13730 OR EQUIV.
 5. SHELF JACK POINTS 9 & 11 TO MAKE CONTACT WHEN SELECTOR IS REMOVED
 6. P2 MULT. CONNECTIONS.

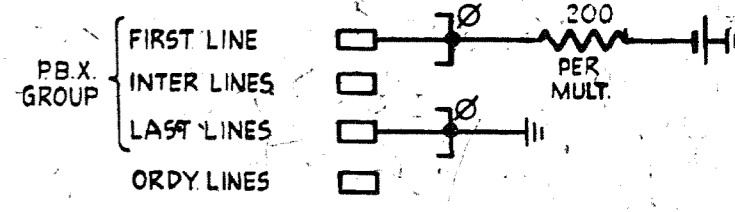

7. WIRING OF PLUGGED-IN PORTION & BANK WIRING TO BE 19 SWG
 ALL REMAINING WIRING TO BE 23 SWG UNLESS OTHERWISE SPECIFIED.
 8. INSERT STRAP BETWEEN U21 & U23 WHEN LOCAL METERING IS REQUIRED.
 9. WHEN TRUNK OFFER CALLS ORIGINATE FROM AN ASC INSULATE CONTACTS HR25 & HR26.

BATT. W. - U12-HR2-H5c-Hc-R1b-R2b-Ae-Gb-Je-TOe-VMe-RM2-RB1b-R4b-R5b-R7b
 ETH. R. - U11-TM22-HR21-H523-H5a-D22-CD21-CD4-H7-A2-G1-G6-B23-B1-J23-NR1-RB1d-R6a-TJ7

BATT. BK. 20 SWG FUSE (4B) U12
 EARTH R. 20 SWG FUSE (4A) U11

NO. 19 ADDED (63878)	5	20-8-51	JR
TITLE AMENDED (80107)	6	25-9-50	RQ
NOTE 8 AND ASSOCIATED WIRING ADDED	4		
PI & P2 MULTS. ONLY, WERE PAIRED.	3		
SPRING NOS. G24 25 26 WERE NOT SHOWN	2		
	1		
AMENDMENT PARTICULARS	ISSUE	DATE	APPD
N.Z.P.O.	DRAWN R.L.	CHECKED	WIRING R.F.P.

U.I.X. No. N.Z. 13
 FINAL SELECTOR
 2-10 P.B.X. TYPE

SIZE M 50V H

GBW 13900
 ENGR'S RECORD

FROM SELECTOR LEVELS

FOR CONNECTIONS TO SUBS. LINE EQUIPMENT SEE RELEVANT LINE CIRCUIT.

I.D.F. MULT.

TERMINALS ON BANK MULT. STRIP CONN.