


NZPO NOTE

A IN SOME CASES EG. TO BAR INCOMING SUBSCRIBER DIALLED JUNCTIONS ACCESS TO A DEPENDENT EXCHANGE THE POSITIVE BATTERY SUPPLY MAY BE DISCONNECTED

B INSERT STRAP SHOWN WHEN USED WITH OUTGOING SENDER SCHEME

- NOTES**
- FUSE - 1.5A PER 2 CCTS
 - INSERT STRAP SHOWN WHEN TRUNK OFFERING IS REQ'D.
 - INSERT STRAPS SHOWN WHEN LINE FINDER CONTROL RELAY SET NO. 1 IS FIRST CHOICE INSERT STRAPS SHOWN WHEN LINE FINDER CONTROL RELAY SET NO. 2 IS FIRST CHOICE.
 - WHEN GBW 15510 IS PROVIDED USE CABLING SHOWN AND DELETE CABLING SHOWN X
 - INTERNAL WIRING OF STRIP MOUNTED SET TO BE 25 SWG
 - FOR WIRING SEE GBW 13730 OR EQUIV.
 - TERMINALS ARE ON STRIP CONNS. AS SPECIFIED: -
ISC - L.H. STRIP CONN (REAR VIEW)
25C - R.H. STRIP CONN (REAR VIEW)
AND ARE DESIGNATED ISC, 25C IN WIRING RUNS.
 - LEVELS 8 & 9 REFER TO NZ.P.O. REVERSED DIAL NUMBERING SCHEME.
 - DESIGNATIONS IN BRACKETS APPLY TO SECOND CIRCUIT WHEN REQUIRED.

CROSS CONNECTED ON I.D.F. LOCAL AS REQ'D.

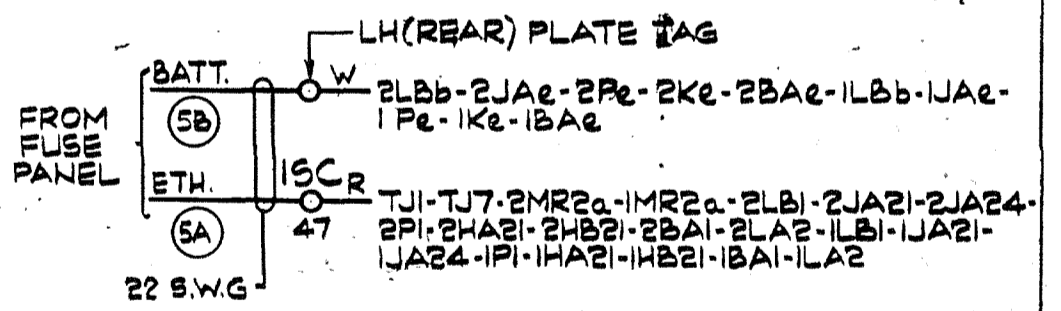

NZPO	AMENDMENT PARTICULARS	ISSUE DATE	APP.
	ISSUE DATE	APP.	
DRAWN (CHECK WIRING CIRCUIT)	LA X No NZ 13		
	INCOMING JUNCTION FROM PARENT OR NON-DEPENDENT EXCHANGE		
GBW 13980	SIZE	M	50V
	RELEASE		OPERATE

