



- NOTES:--
- FUSE - 1.0A PER CIRCUIT
 - LEVELS 8 & 9 REFER TO NZPO REVERSED DIAL NUMBERING SCHEME
 - CONNECT STRAPS SHOWN - - - - WHEN LINE FINDER CONTROL RELAY SET NO.1 IS FIRST CHOICE CONNECT STRAPS SHOWN - x - x - WHEN LINE FINDER CONTROL RELAY SET NO.2 IS FIRST CHOICE.
 - WHEN ROUTE IS BARRED TO CALLS FROM I/C JUNCTS STRAP TERMS 15C 31 & 32 SHOWN - - - -
 - Ø FOR WIRING SEE GBW 13730 OR EQUIV
 - WHEN PARENT MANUAL BOARD IS WIRED FOR BATTERY DIALING DISCONNECT WIRING SHOWN THUS - - - - AND STRAP TERMINALS 15C 47 & 49 AND 15C 48 & 50 SHOWN - - - -
 - RESISTOR R4 WILL BE SUPPLIED BY NZPO. VALUE OF R4 TO BE SUCH THAT THE LINE CURRENT GIVES RPD OF 2.4VOLTS BETWEEN TJB11 & TJB2
 - STRAP TERMINALS 25C 10 & 20 TO ENABLE OPERATOR TO TRUNK OFFER SHOWN - - - -
 - 15C REFERS TO UPPER STRIP CONN. 25C REFERS TO LOWER STRIP CONN.
 - ALL WIRING TO BE 25SWG UNLESS OTHERWISE SPECIFIED.
 - WHEN PARENT EXCHANGE IS 2000 TYPE S.C.S OR USES NON-RING THROUGH CORD CIRCUITS, CONNECT EARTH TO TERMINAL 15C 46 AS SHOWN THUS - - - -

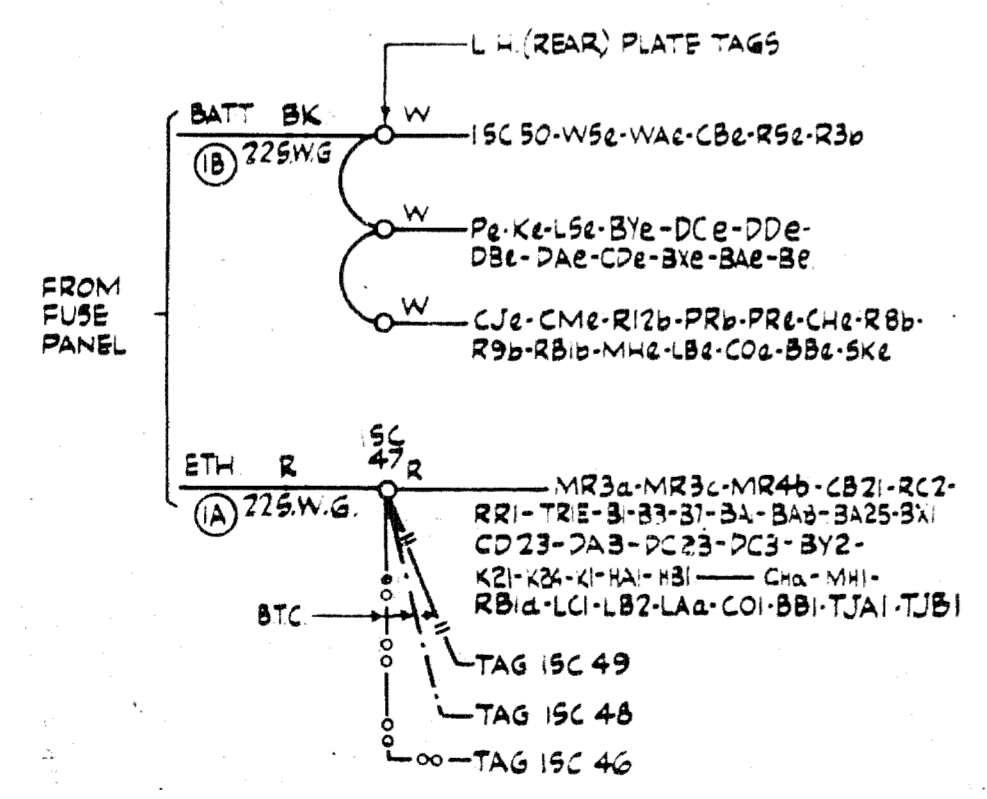

NZPO NOTES -
 A. IN CASES OF PREMATURE OPERATION, TM RELAY SHOULD BE CHANGED TO 1000 OHMS.

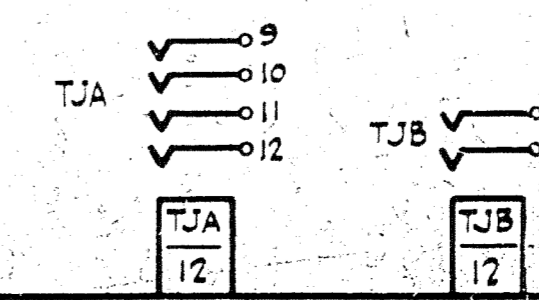

NZPO NOTE A ADDED (133490)		GA	16.6.77	RED
WIRE COLOURS IN BRACKETS ADDED (58058)		B	2.12.66	DIB.
1/2 3 O/G CALL COUNT METER LEADS DELETED		5		
VALUE OF TRANSFORMER WINDINGS DELETED		4		
DE RELAY WAS SHOWN NOTE 11 & COPIED		3		
DE RELAY ADDED		2		

AMENDMENT PARTICULARS	ISSUE DATE	APPR	REF. NO.	SIZE	BOY

NZPO	DRAWN	CHECKED	WIRING	CIRCUIT

U.A.X. NO. NZ 13
 BOTHWAY JUNCTION
 TO PARENT EXCHANGE
 LIMITED FACILITY TYPE
 GBW 14451