


0
5 Centimetres
10
15
20
25
30

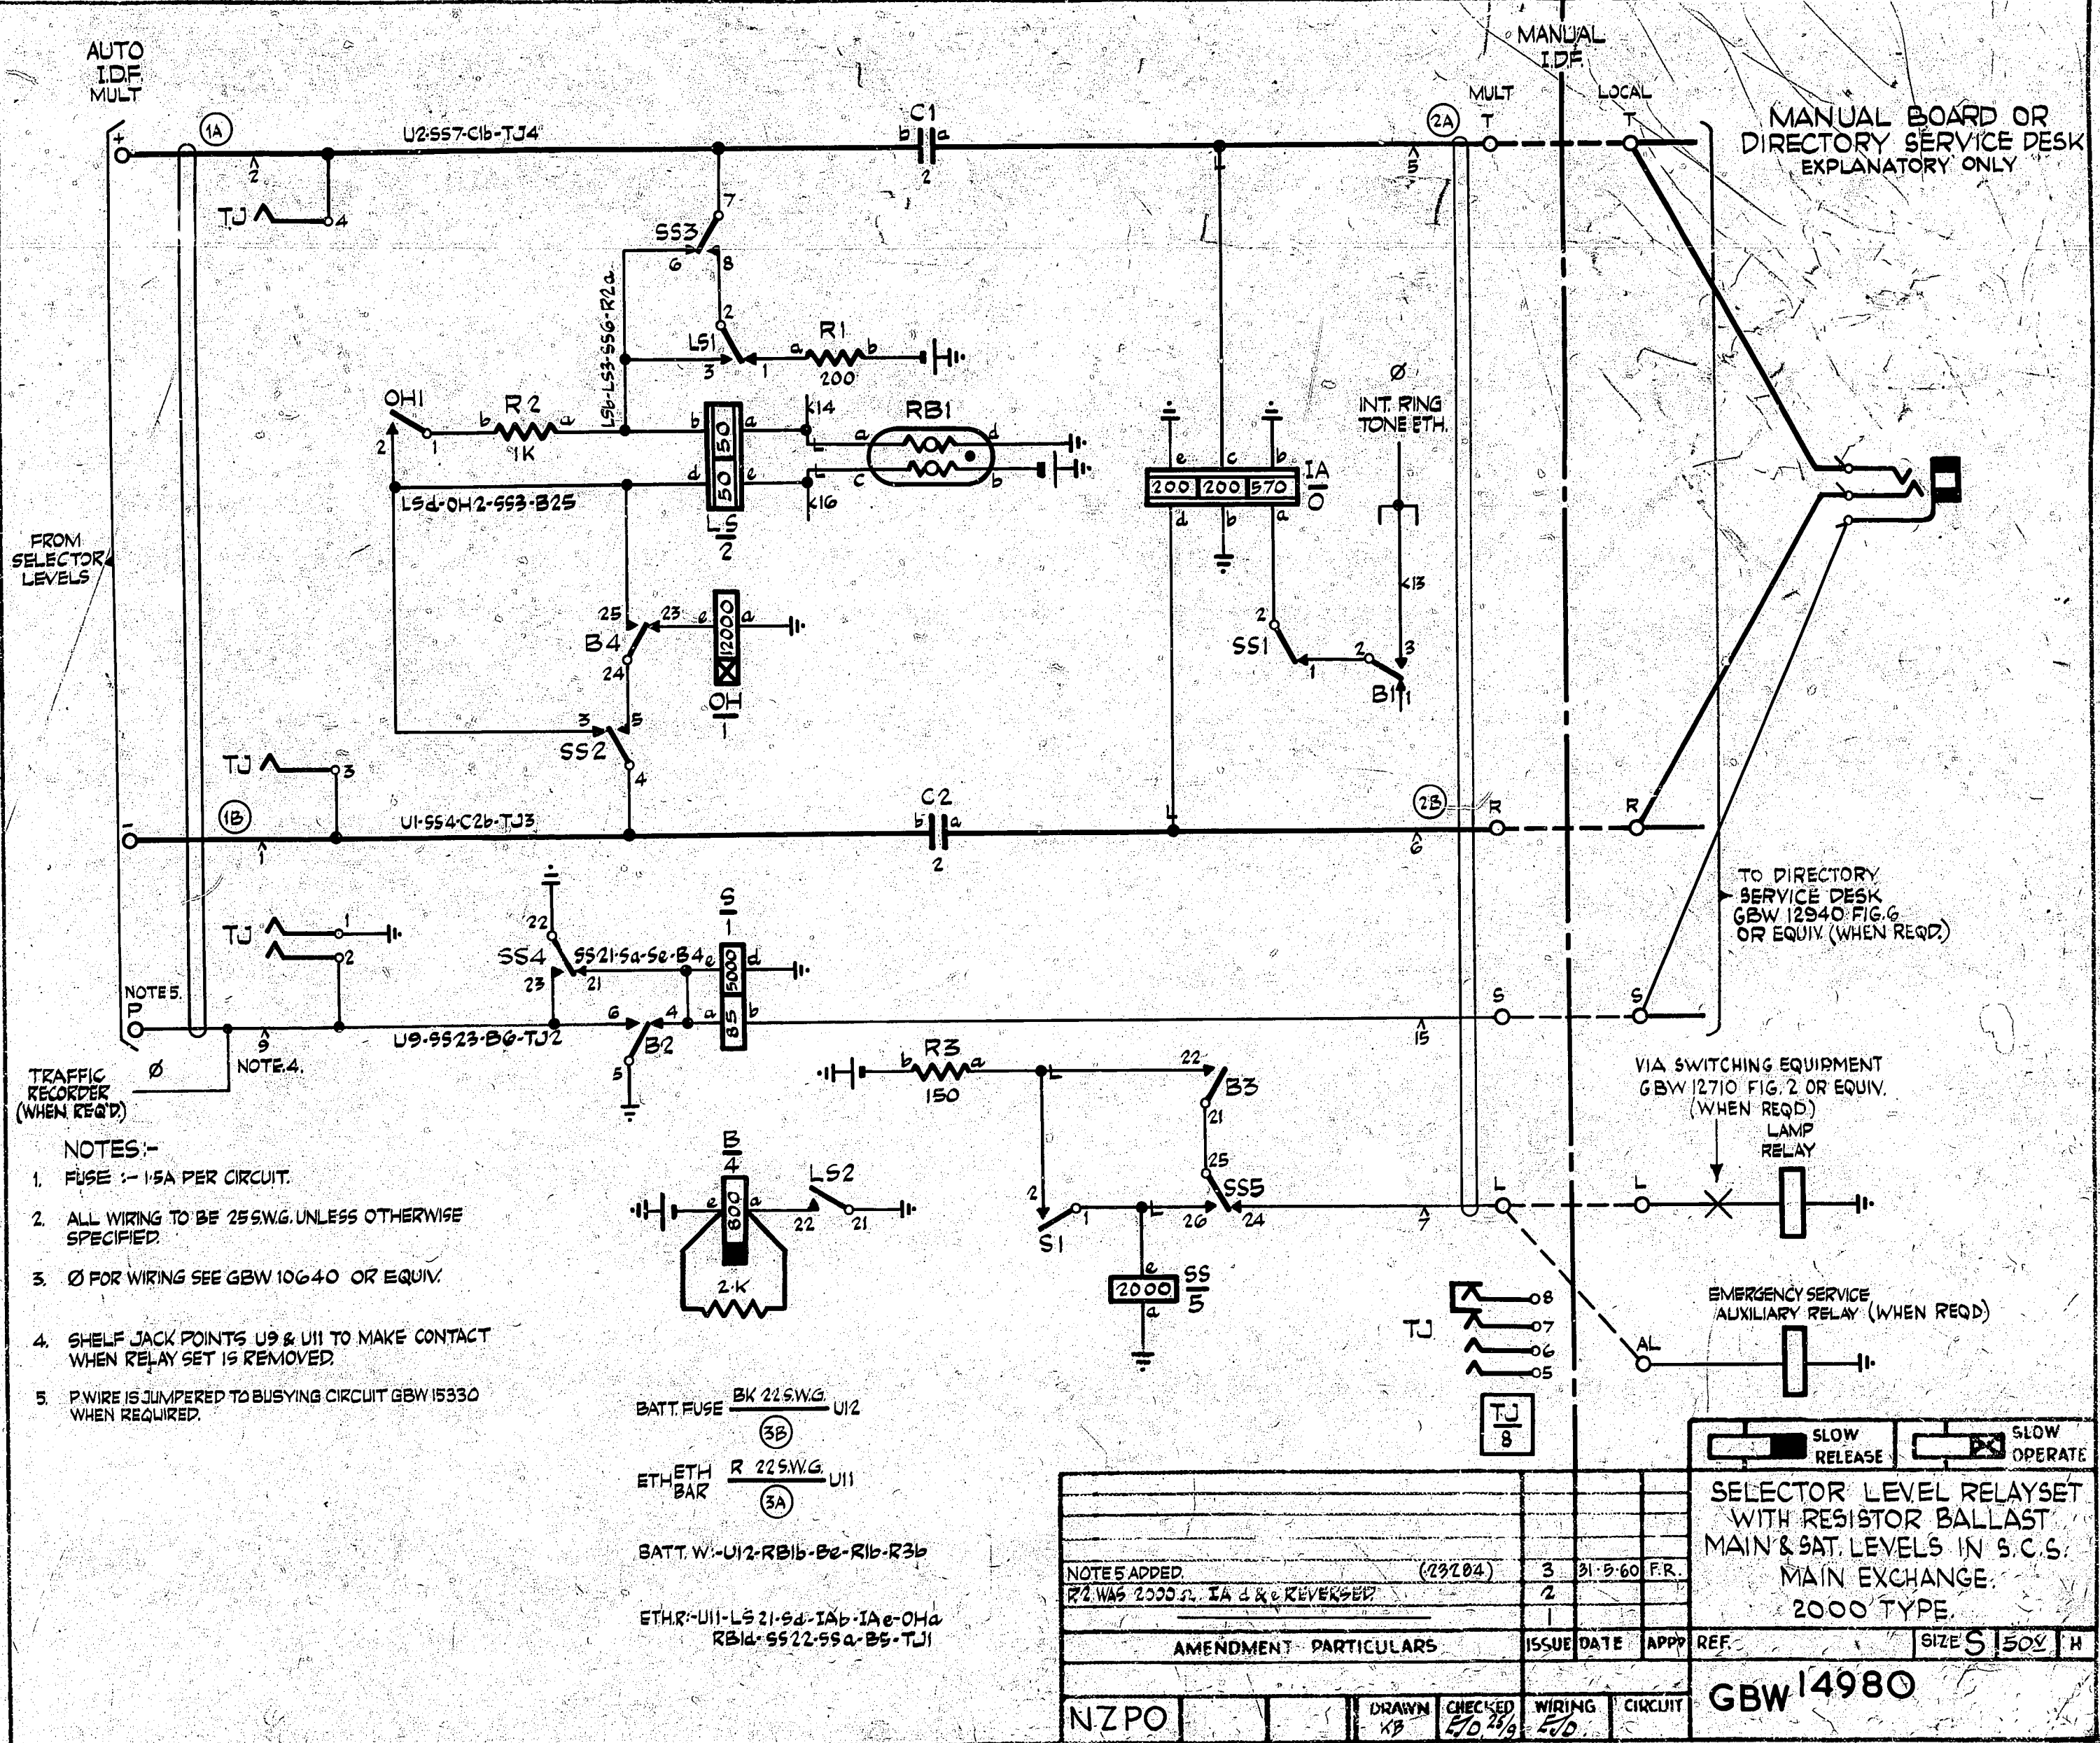

MANUAL BOARD OR DIRECTORY SERVICE DESK EXPLANATORY ONLY

TO DIRECTORY SERVICE DESK GBW 12940 FIG. 6 OR EQUIV. (WHEN REQD.)

VIA SWITCHING EQUIPMENT GBW 12710 FIG. 2 OR EQUIV. (WHEN REQD.) LAMP RELAY

EMERGENCY SERVICE AUXILIARY RELAY (WHEN REQD.)

- NOTES:-
1. FUSE :- 1.5A PER CIRCUIT.
 2. ALL WIRING TO BE 25 SW.G. UNLESS OTHERWISE SPECIFIED.
 3. Ø FOR WIRING SEE GBW 10640 OR EQUIV.
 4. SHELF JACK POINTS U9 & U11 TO MAKE CONTACT WHEN RELAY SET IS REMOVED.
 5. P WIRE IS JUMPERED TO BUSYING CIRCUIT GBW 15330 WHEN REQUIRED.

BATT. FUSE BK 22 SW.G. U12 (3B)

ETH ETH BAR R 22 SW.G. U11 (3A)

BATT. W.-U12-RB1b-B2-R1b-R3b

ETH R-U11-L5 21-5d-IAb-IAe-OHa RB1d-5522-55a-B5-TJ1

SLOW RELEASE SLOW OPERATE

SELECTOR LEVEL RELAYSET WITH RESISTOR BALLAST MAIN & SAT. LEVELS IN S.C.S. MAIN EXCHANGE. 2000 TYPE.

NOTES ADDED	(23704)	3	31-5-60	F.R.
R2 WAS 2000 Ω. IA d & c REVERSED		2		
AMENDMENT PARTICULARS	ISSUE DATE	APPD	REF.	SIZE S 50V H
NZPO	DRAWN KB	CHECKED EJO 25/9	WIRING EJO	CIRCUIT

GBW 14980