


FIG. 1 RELAY SET

MDF EXCH
OR
TJF

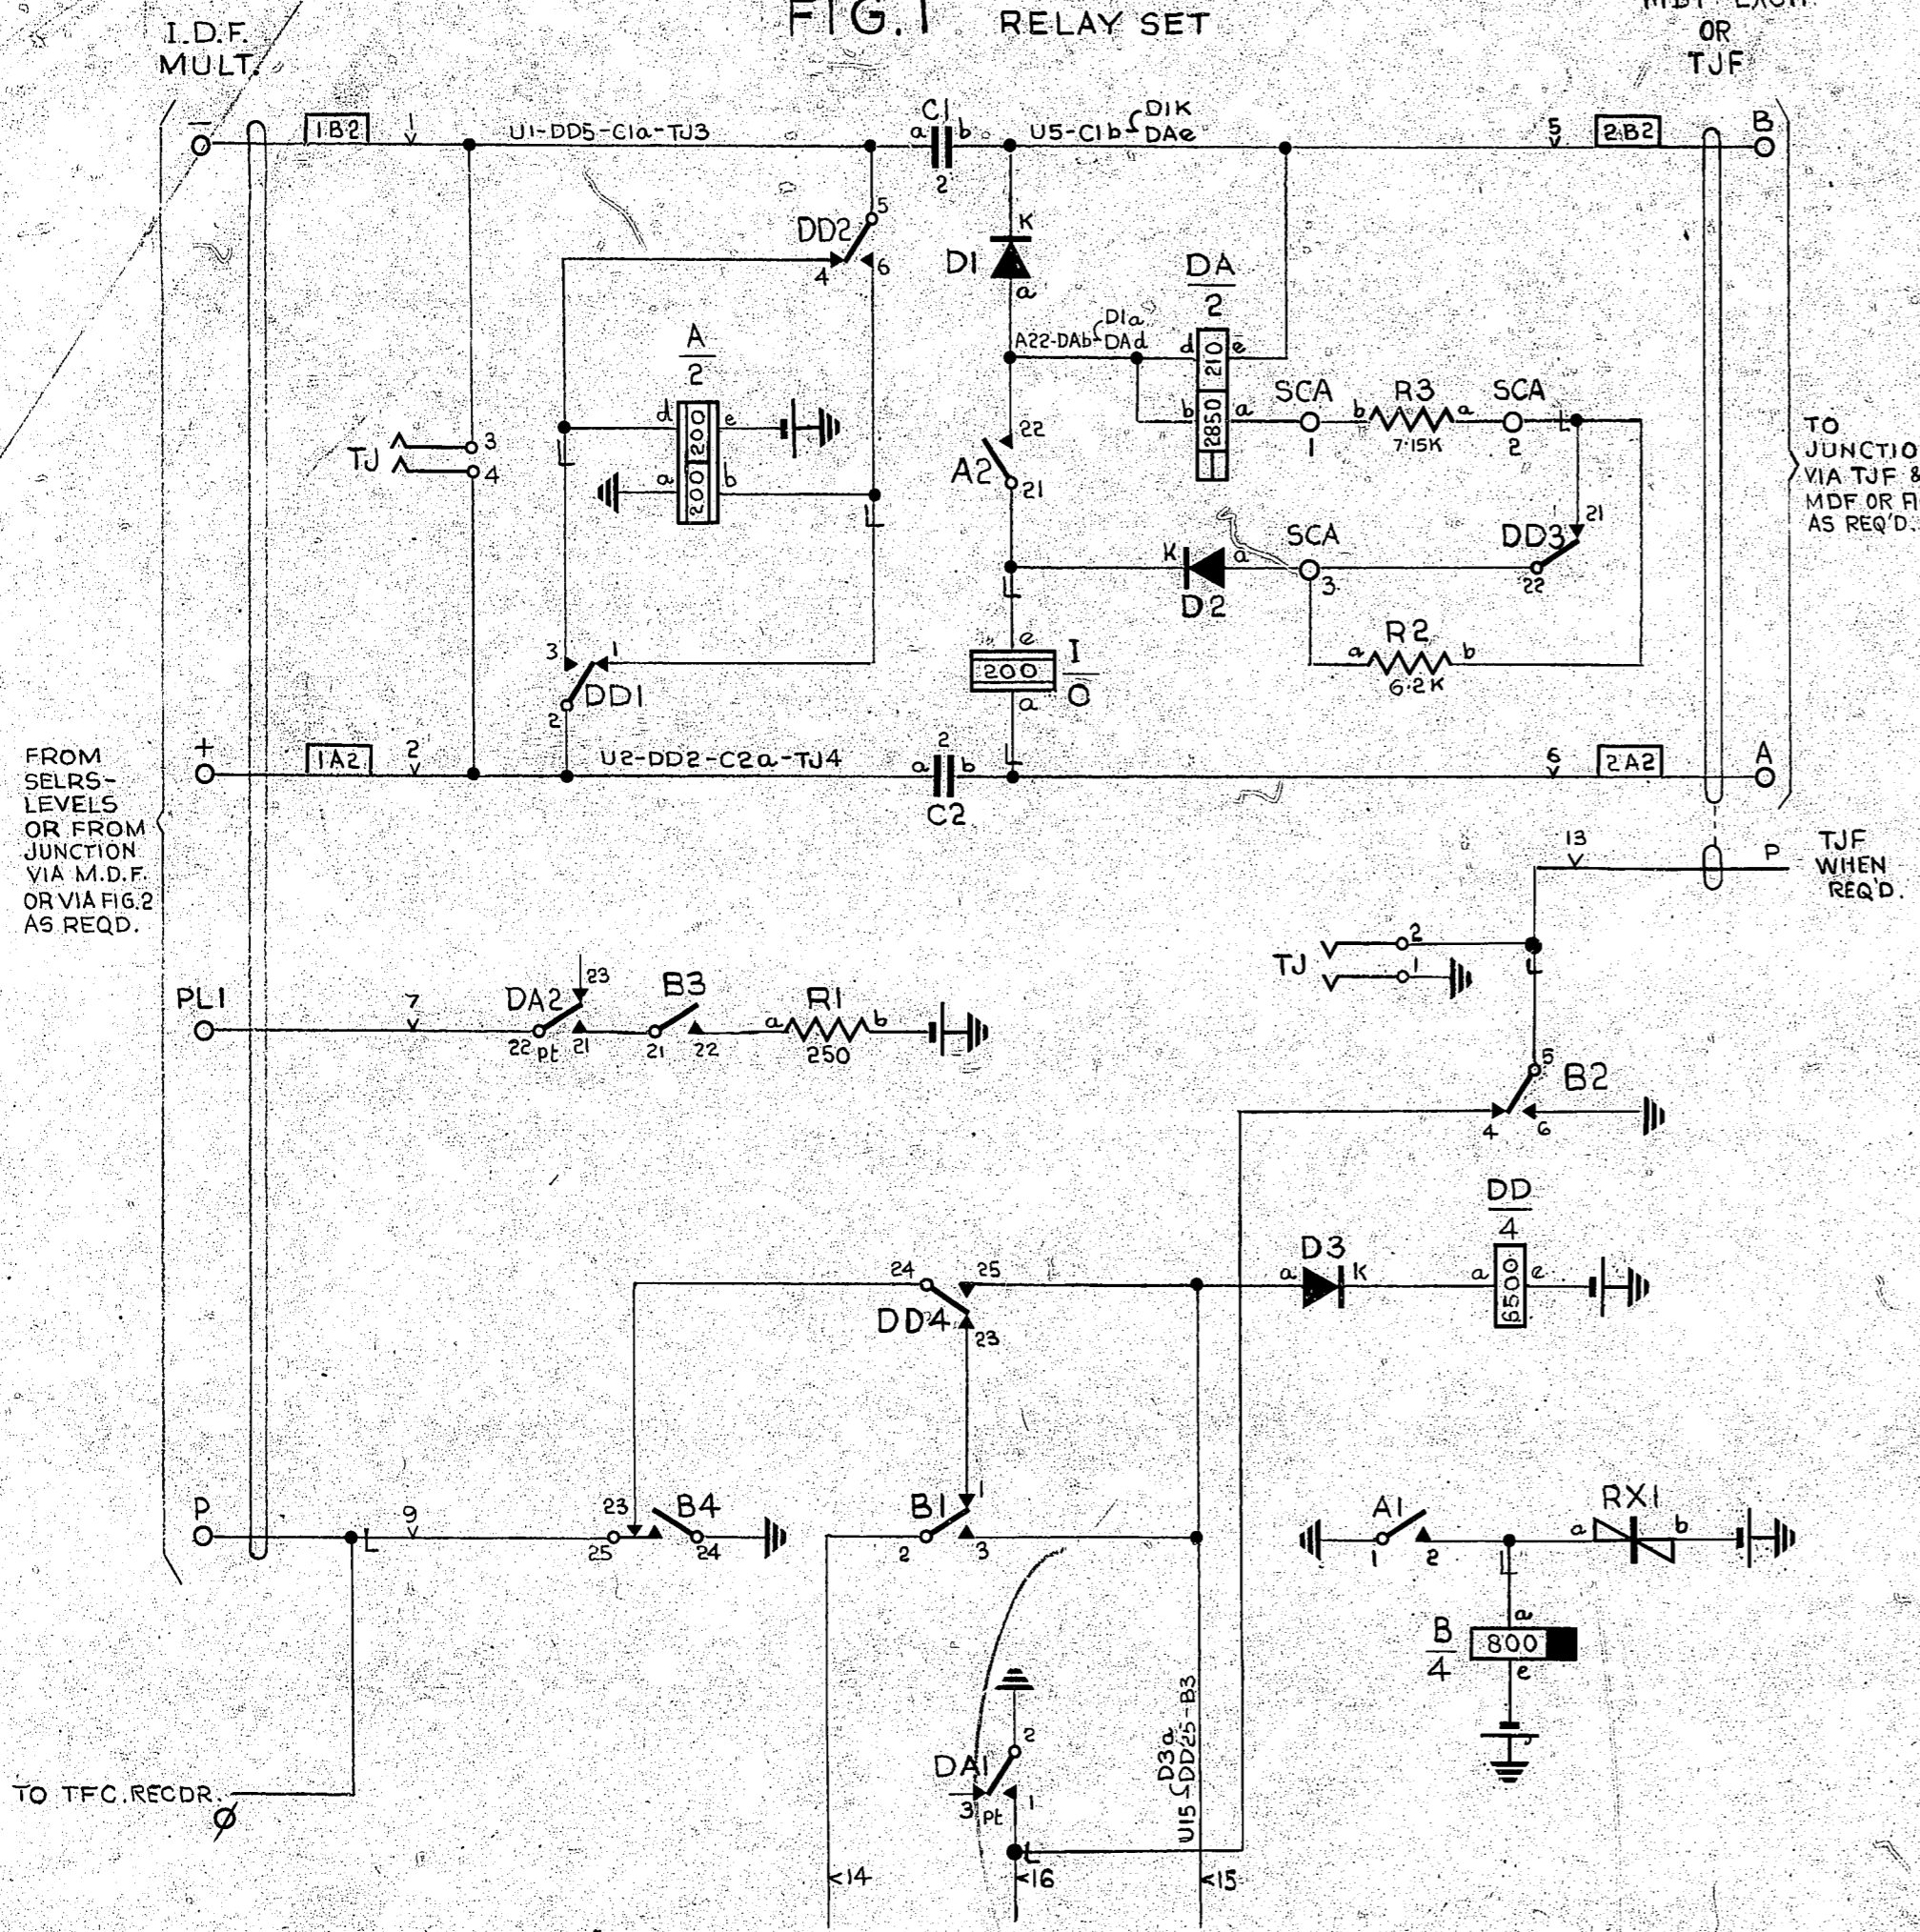

FROM SELRS-LEVELS OR FROM JUNCTION VIA M.D.F. OR VIA FIG. 2 AS REQ'D.

TO JUNCTION VIA TJF & MDF OR FIG. 2 AS REQ'D.


TJF WHEN REQ'D.

TO TFC. RECDR.

NOTE 2

FIG. 2 NEGISTOR RACK

REF:- NZ PO DRG 34442

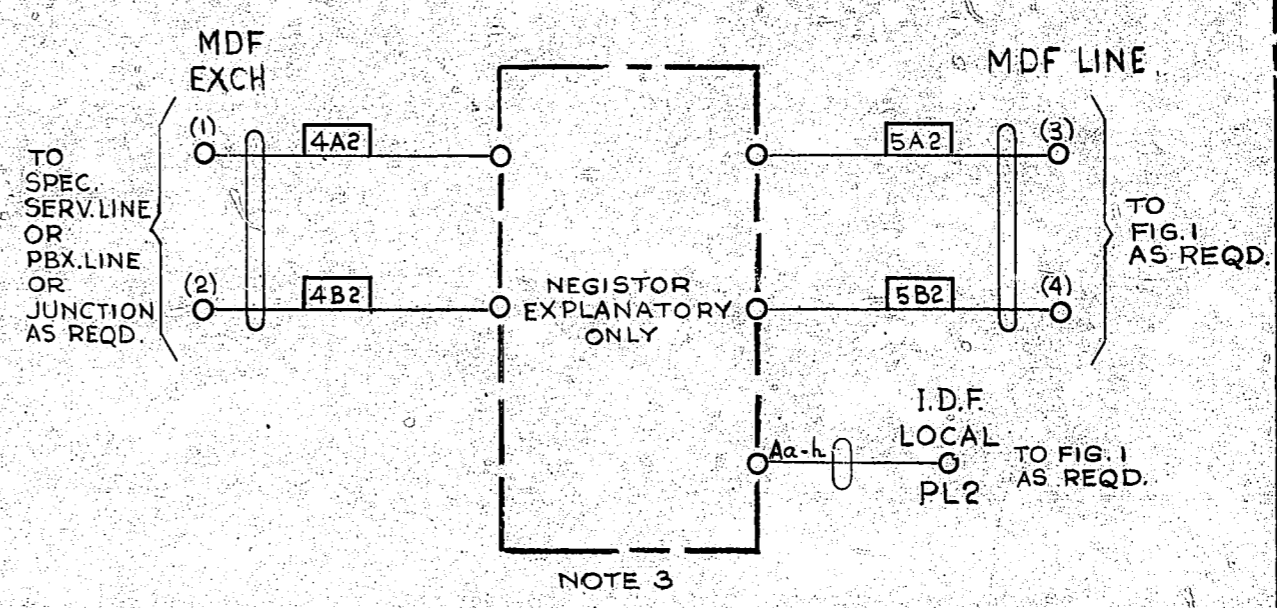

TO SPEC. SERV. LINE OR PBX. LINE OR JUNCTION AS REQ'D.

TO FIG. 1 AS REQ'D.

NOTE 3

NOTES:-

1. FUSING :- 1.5A PER CIRCUIT.
2. WHEN CIRCUIT TERMINATES JUNCTION OR WHEN LOCAL MANUAL HOLD REQUIRED STRAP U15 & U16 AND REMOVE STRAP U14 & U16 FOR ALL OTHER CASES INSERT STRAP U14 & U16 AND REMOVE STRAP U15 & U16
3. NEGISTOR STRAPPED FOR 50V.
4. U9 & U11 MAKE CONTACT WHEN R/S IS REMOVED

5. Ø FOR WIRING SEE GBW.10640 OR EQUIV.

BATT. V 22 SWG. FUSE 3B2 U12
ETH. R. 22 SWG BAR 3A2 U11

BATT. V U12-Ae-DDe-BE-R1b
ETH. R. U11-Aa-A1-B24-B6-DA2-TJ1

| | | | | | |
|-----------------------|--|---------|---------|--|---------|
| | | | | 1/C JUNG. OR SEL. LEV. REPEATER TO SPEC. SERV. WITH OR WITHOUT MANUAL HOLD AND NEGISTOR. | |
| R3 WAS 7.2 K Ω | | (18068) | 2 | 1-12-70 | R.W. |
| AMENDMENT PARTICULARS | | | ISSUE | DATE | APPD |
| | | | | REF. N.Z. DRG. 34029 | |
| | | | | SIZE M 50 V W | |
| NZ.P.O. | | DRAWN | CHECKED | WIRING | CIRCUIT |
| | | J.G. | | | |
| | | | | GBW 15160 | |

