



FIG. 1.

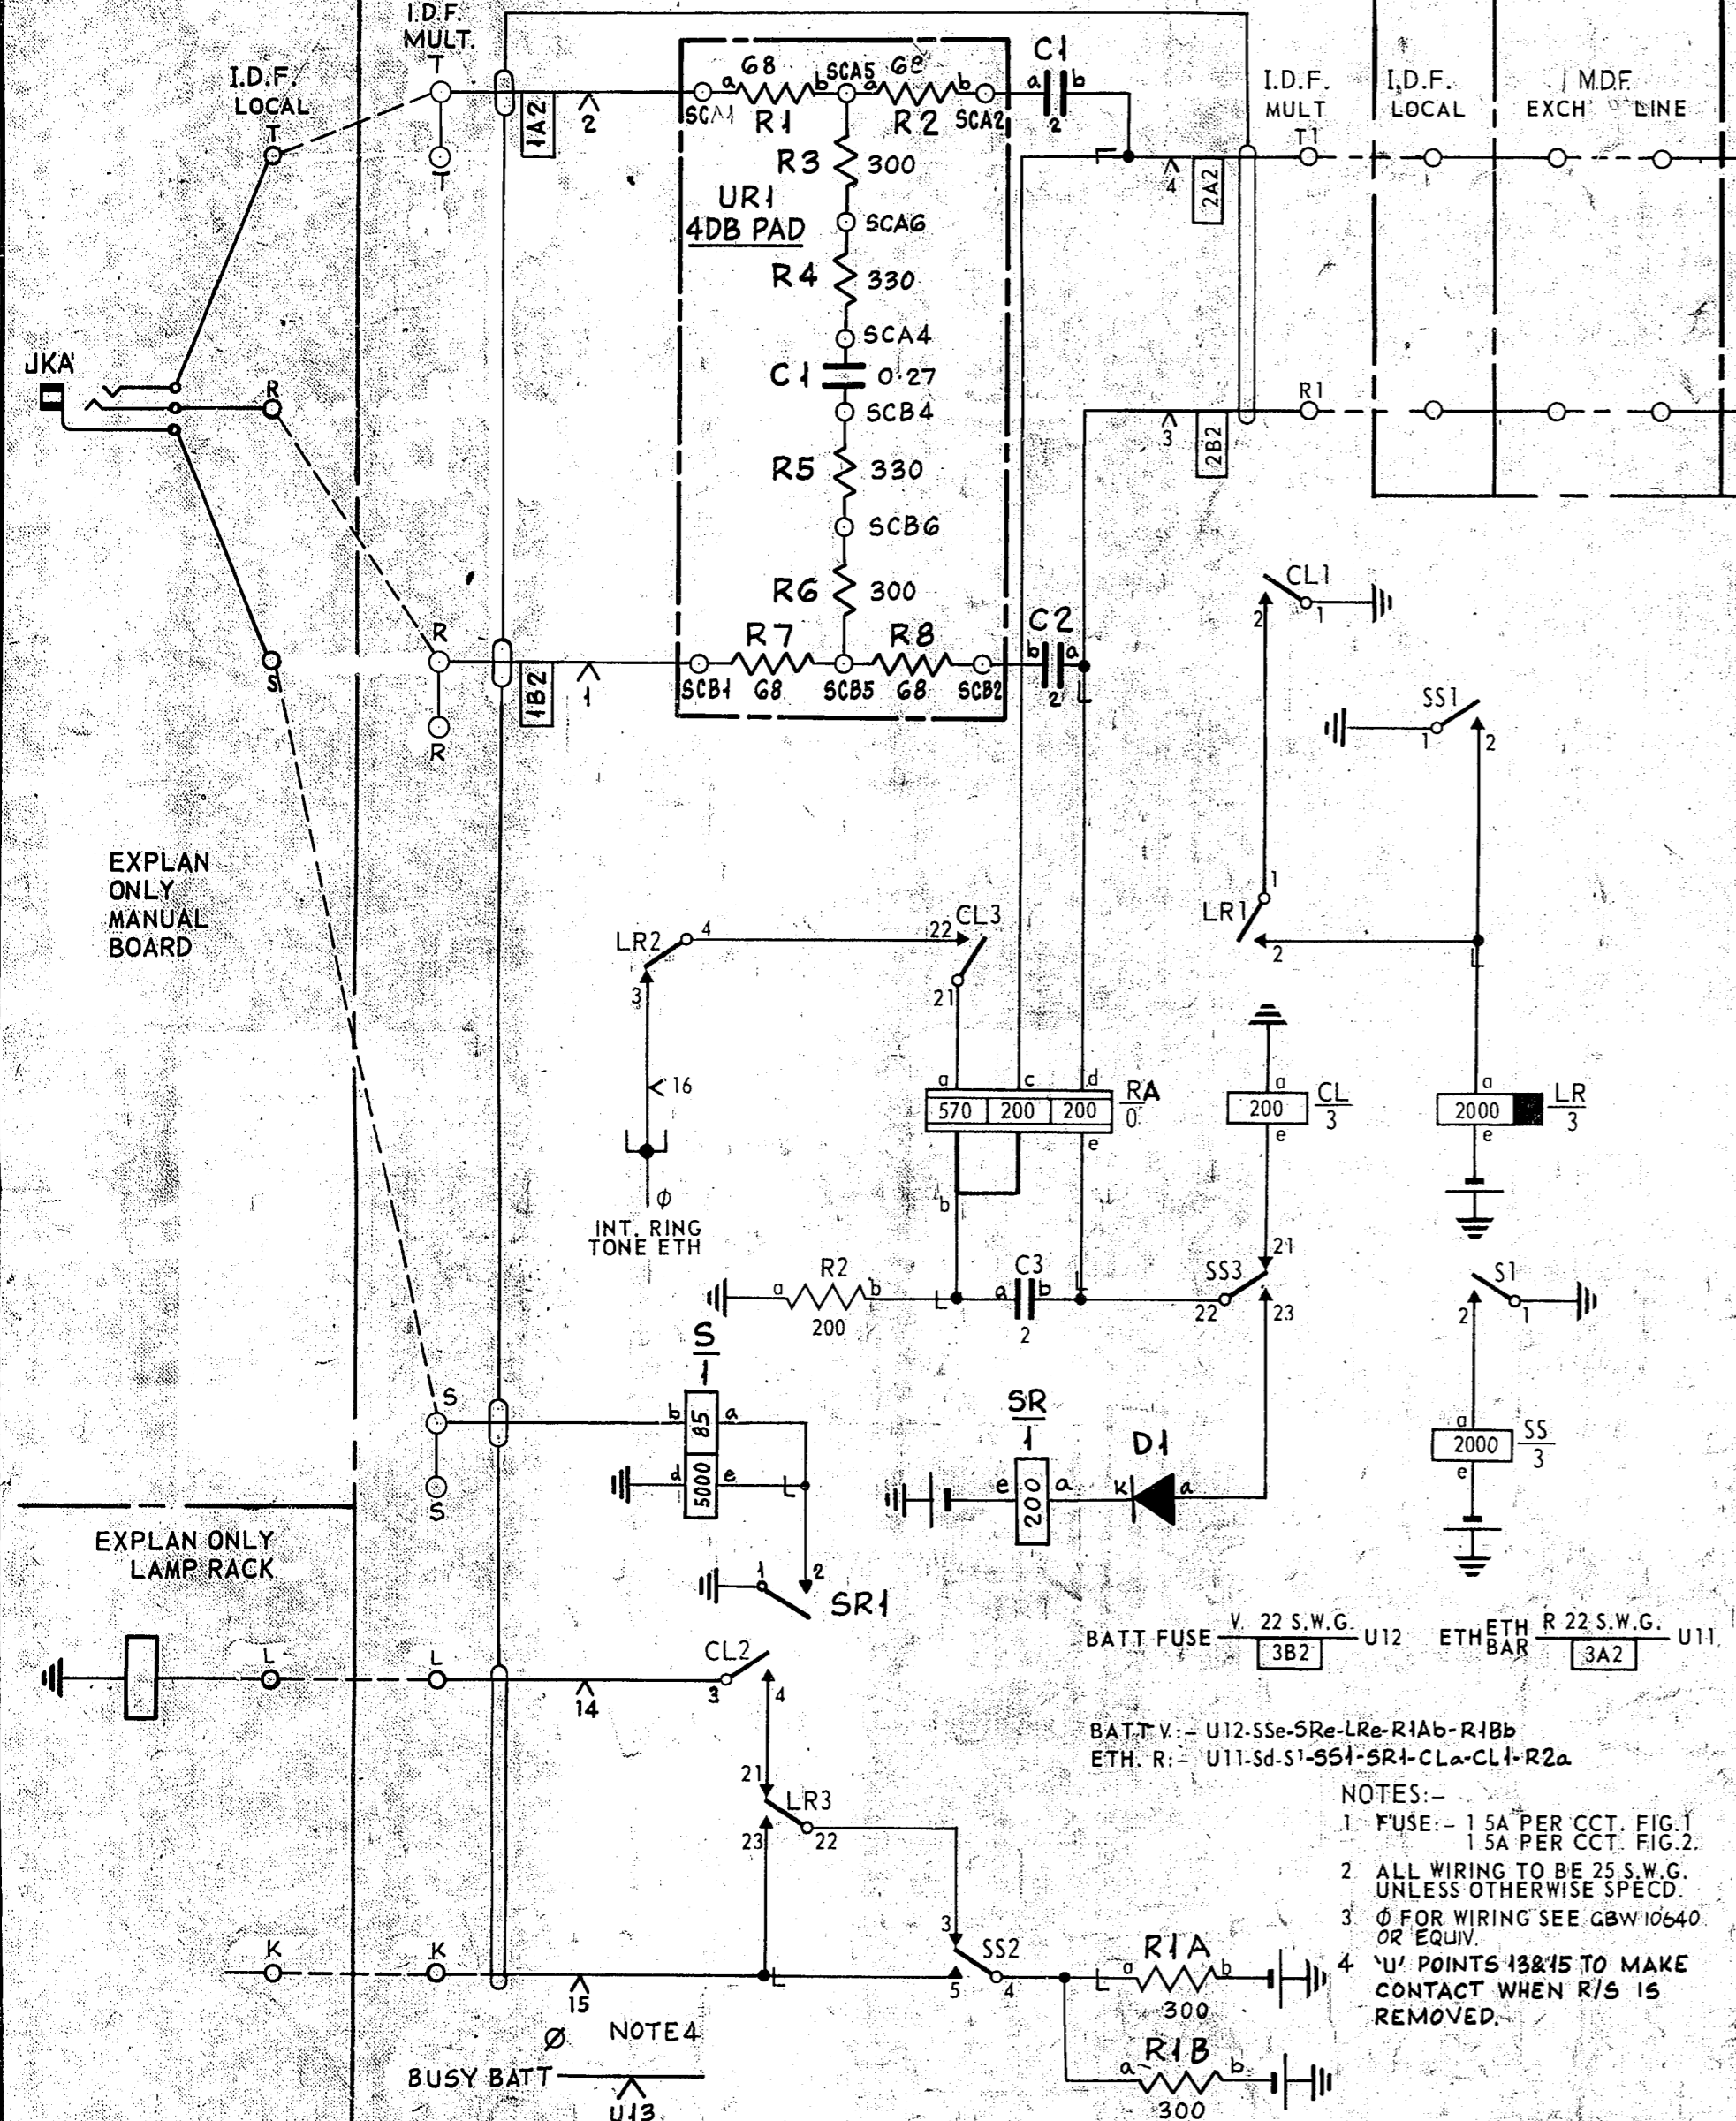

- NOTES:-
1. FUSE - 1.5A PER CCT. FIG. 1
1.5A PER CCT. FIG. 2.
 2. ALL WIRING TO BE 25 S.W.G. UNLESS OTHERWISE SPEC'D.
 3. Ø FOR WIRING SEE GBW 10640 OR EQUIV.
 4. 'U' POINTS 13 & 15 TO MAKE CONTACT WHEN R/S IS REMOVED.

BATT. FUSE V. 22 S.W.G. U12 ETH. ETH. R. 22 S.W.G. U11
 BATT. V.:- U12-SSe-5Re-LRe-R1Ab-R1Bb
 ETH. R.:- U11-Sd-S1-SS1-SR1-CLa-CL1-R2a

FIG. 2.

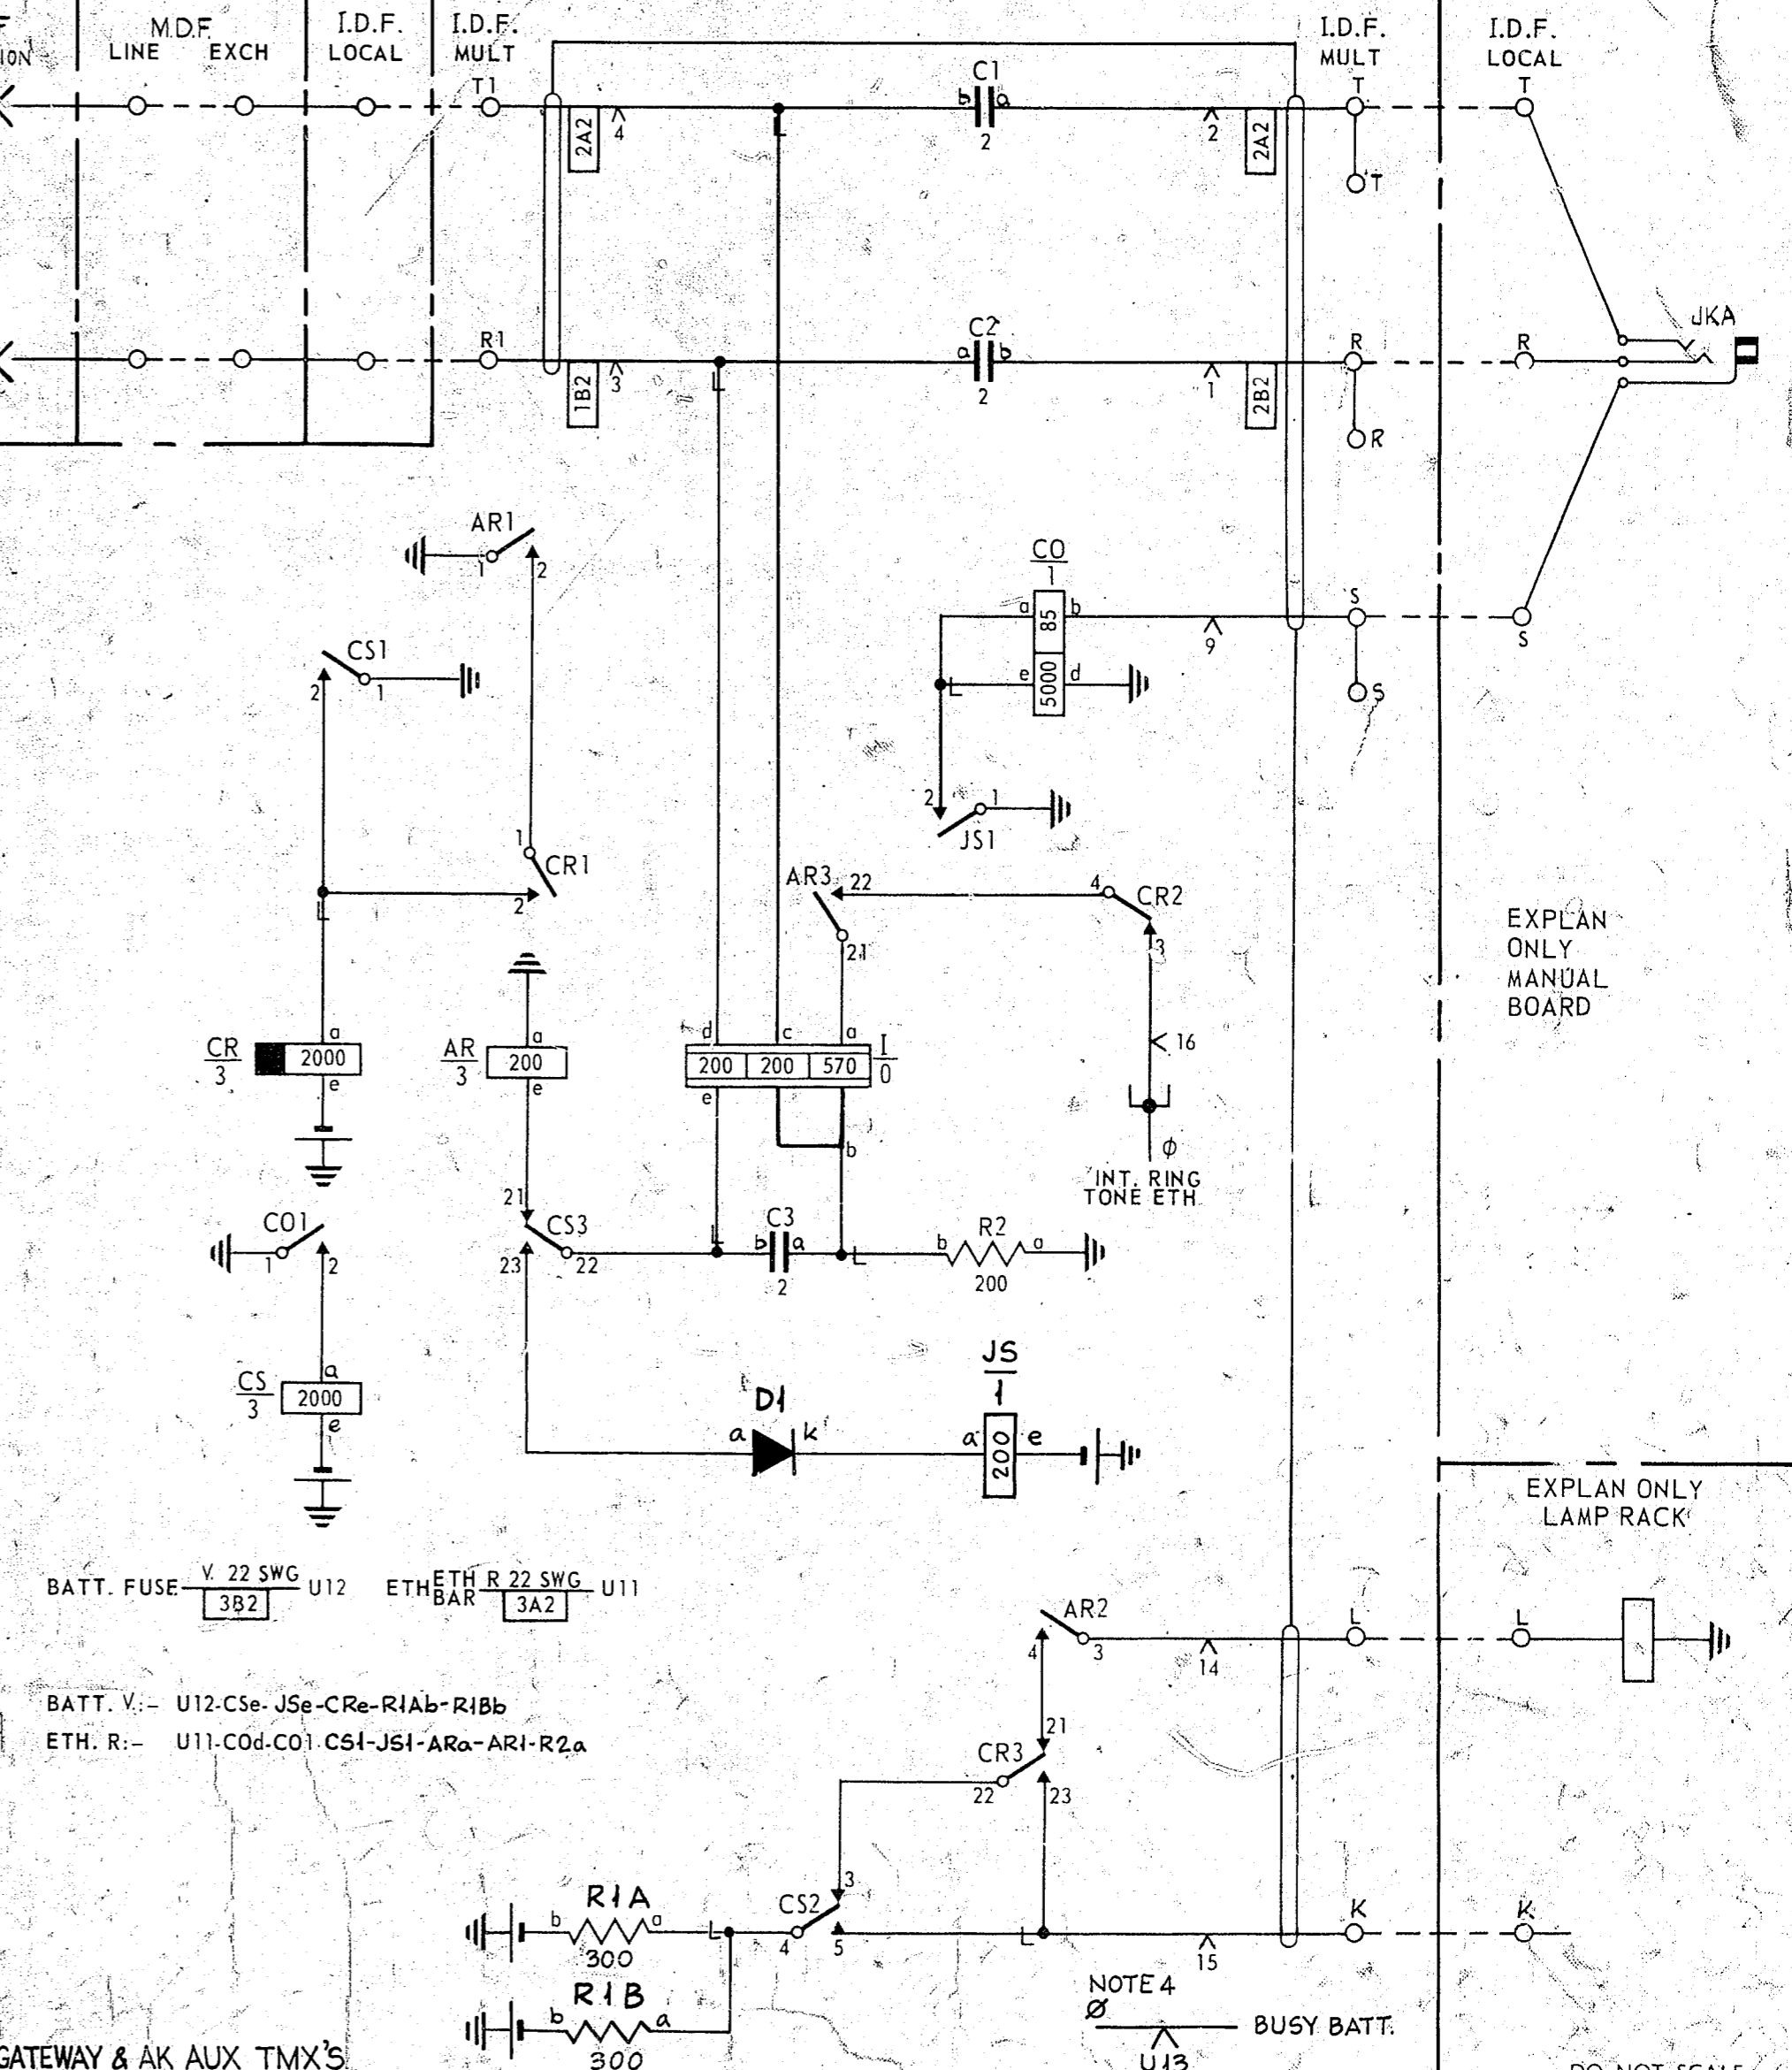

BATT. FUSE V. 22 SWG U12 ETH. ETH. R. 22 SWG U11
 BATT. V.:- U12-CSe-JSe-CRe-R1Ab-R1Bb
 ETH. R.:- U11-COd-CO1-CS1-JS1-ARa-AR1-R2a

GATEWAY & AK AUX. TMX'S

A2 A3	DRN	RAH/SM	ENG						
	TR		MTH						
	CHK	9/10/60	DRFT.						
	ENG		DEPT.						
N Z P O			AMENDMENT			(34094)	A	4-6-71	B.5-H

TOLERANCES (UNLESS OTHERWISE STATED)	MATERIAL	FINISH	REF.:-	50v H
THREE PLACE DEC. DIMNS				
TWO PLACE DEC. DIMNS				
FRACTIONAL DIMENSIONS				
OTHER REQUIREMENTS TO E.S.15				
TITLE: BOTHWAY MANUAL BOARD ACCESS TO AUXILIARY TOLL S.C.S. 2000 TYPE			SIZE: M	
			GBW 15520 MOD. A.	

THIRD ANGLE PROJECTION

EXPLAN ONLY MANUAL BOARD

EXPLAN ONLY LAMP RACK

DO NOT SCALE