

FIG. 1A

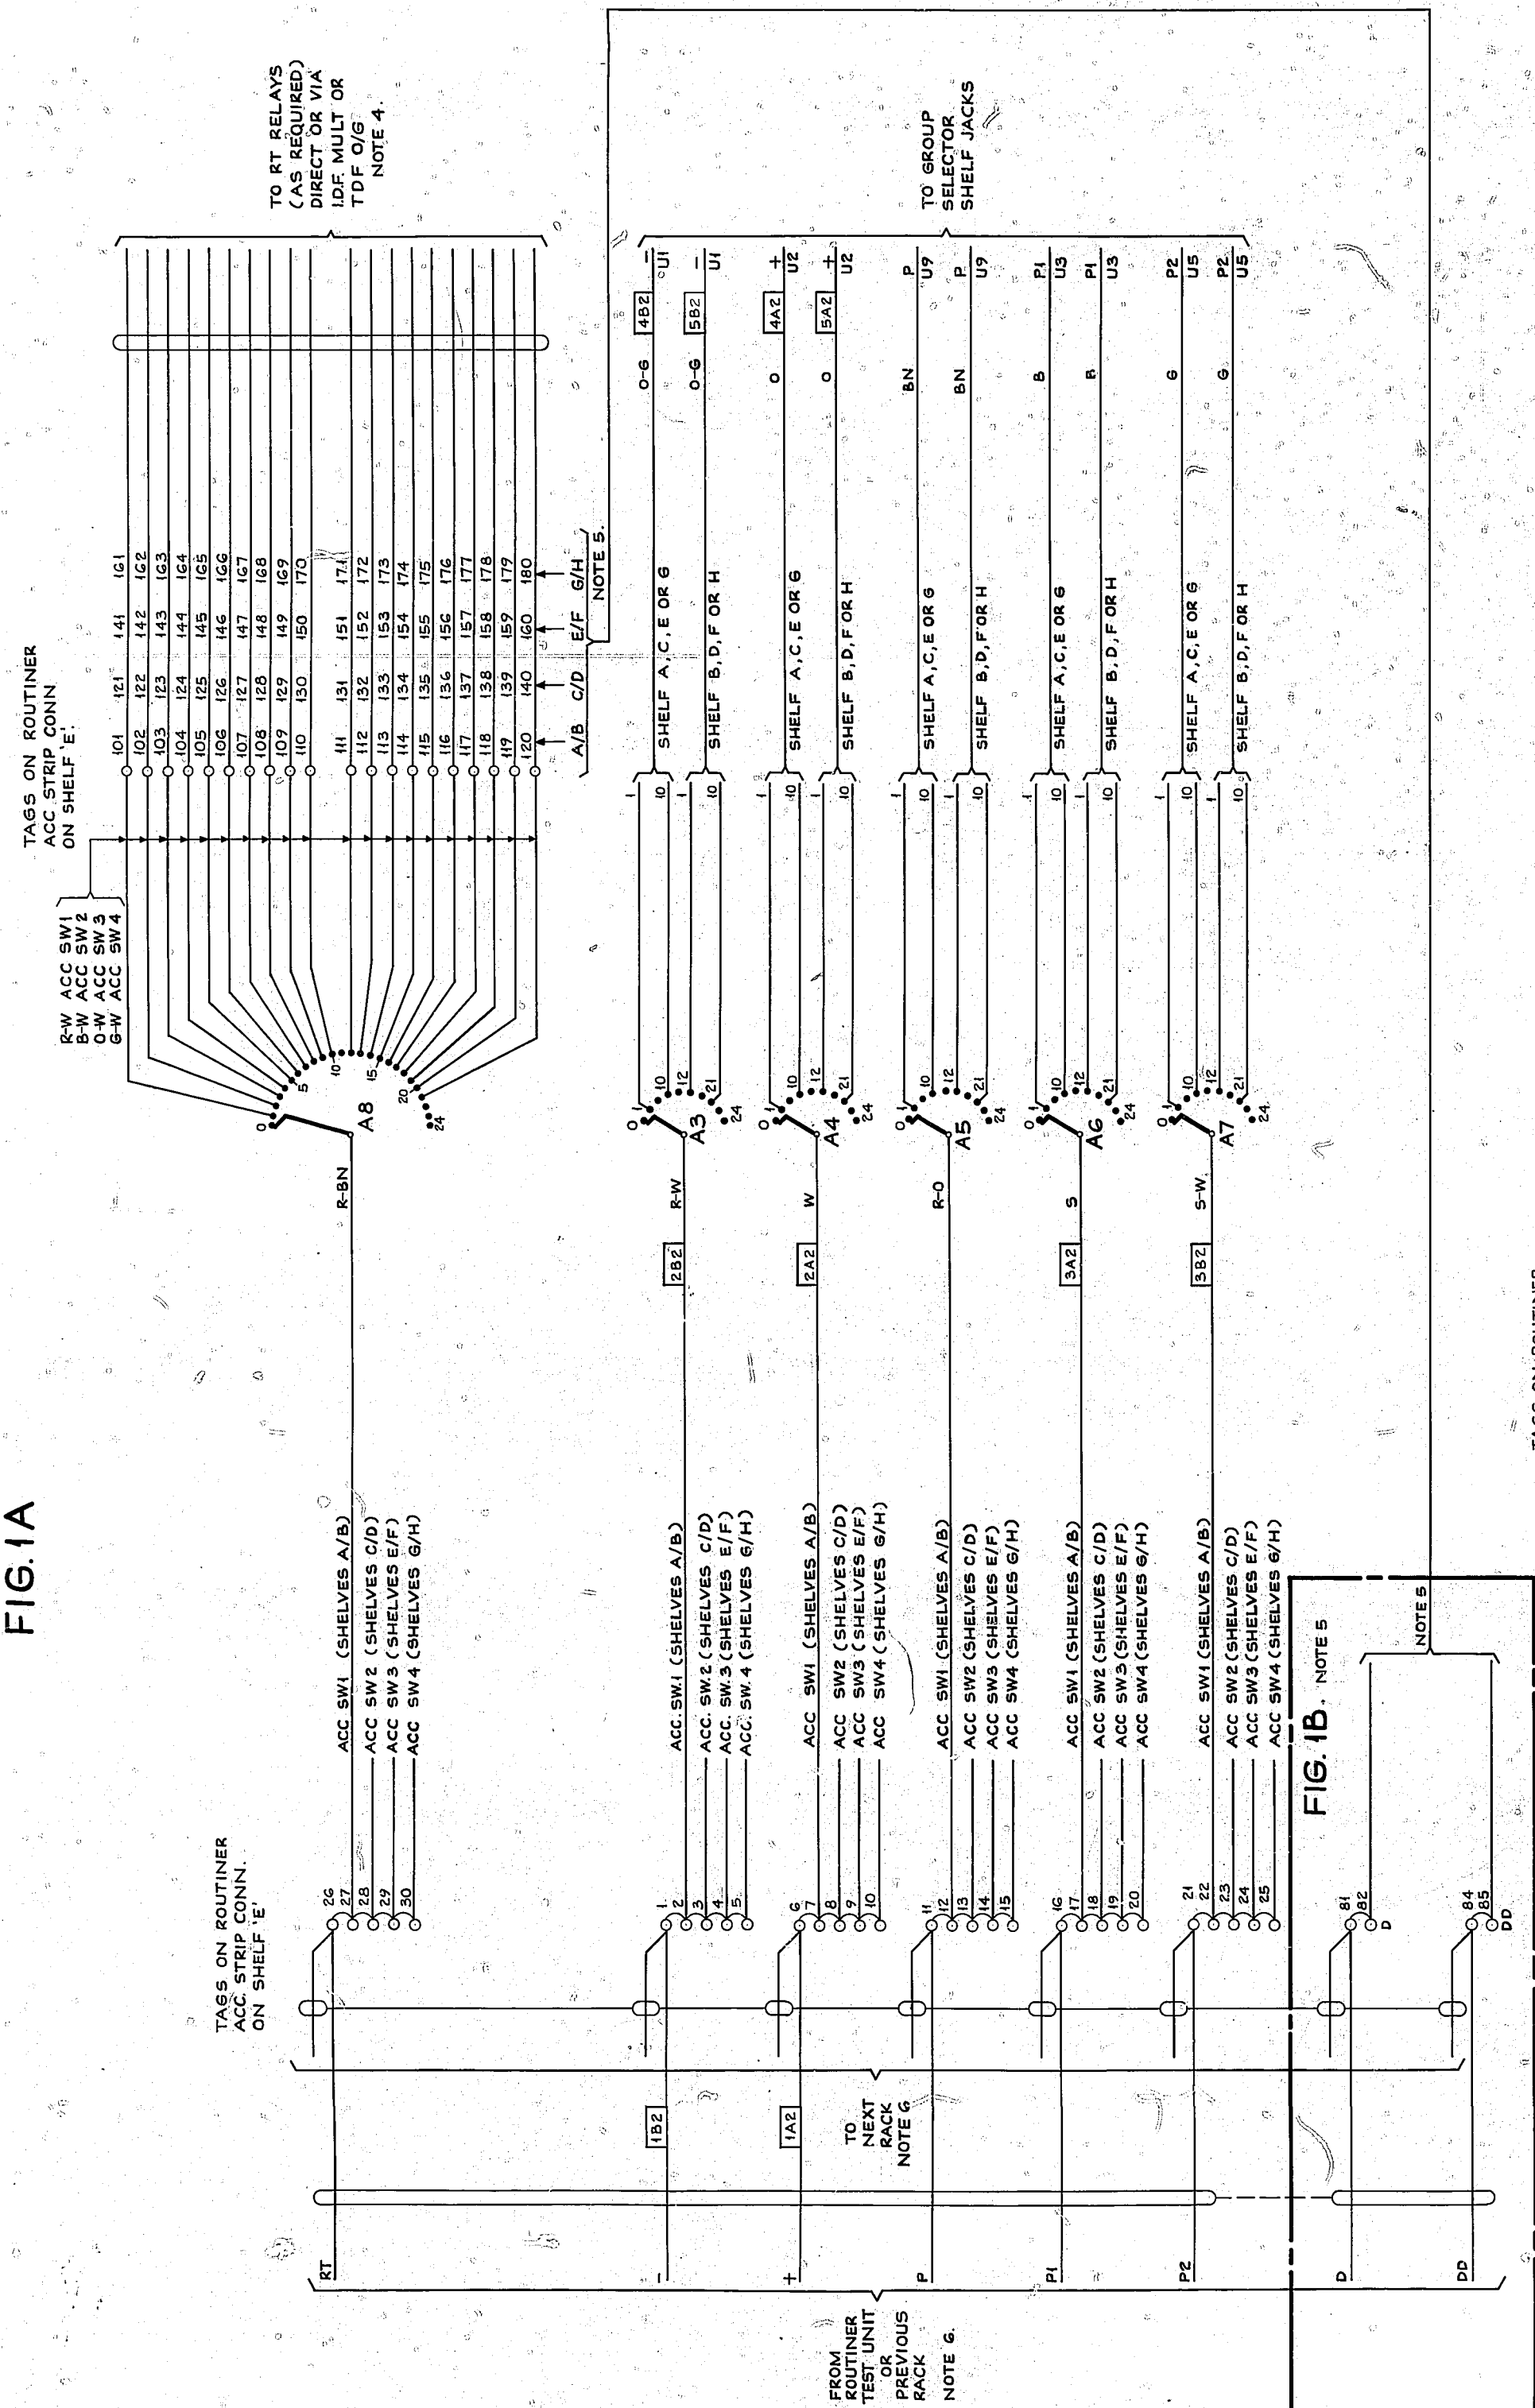


FIG. 1B. NOTE 5

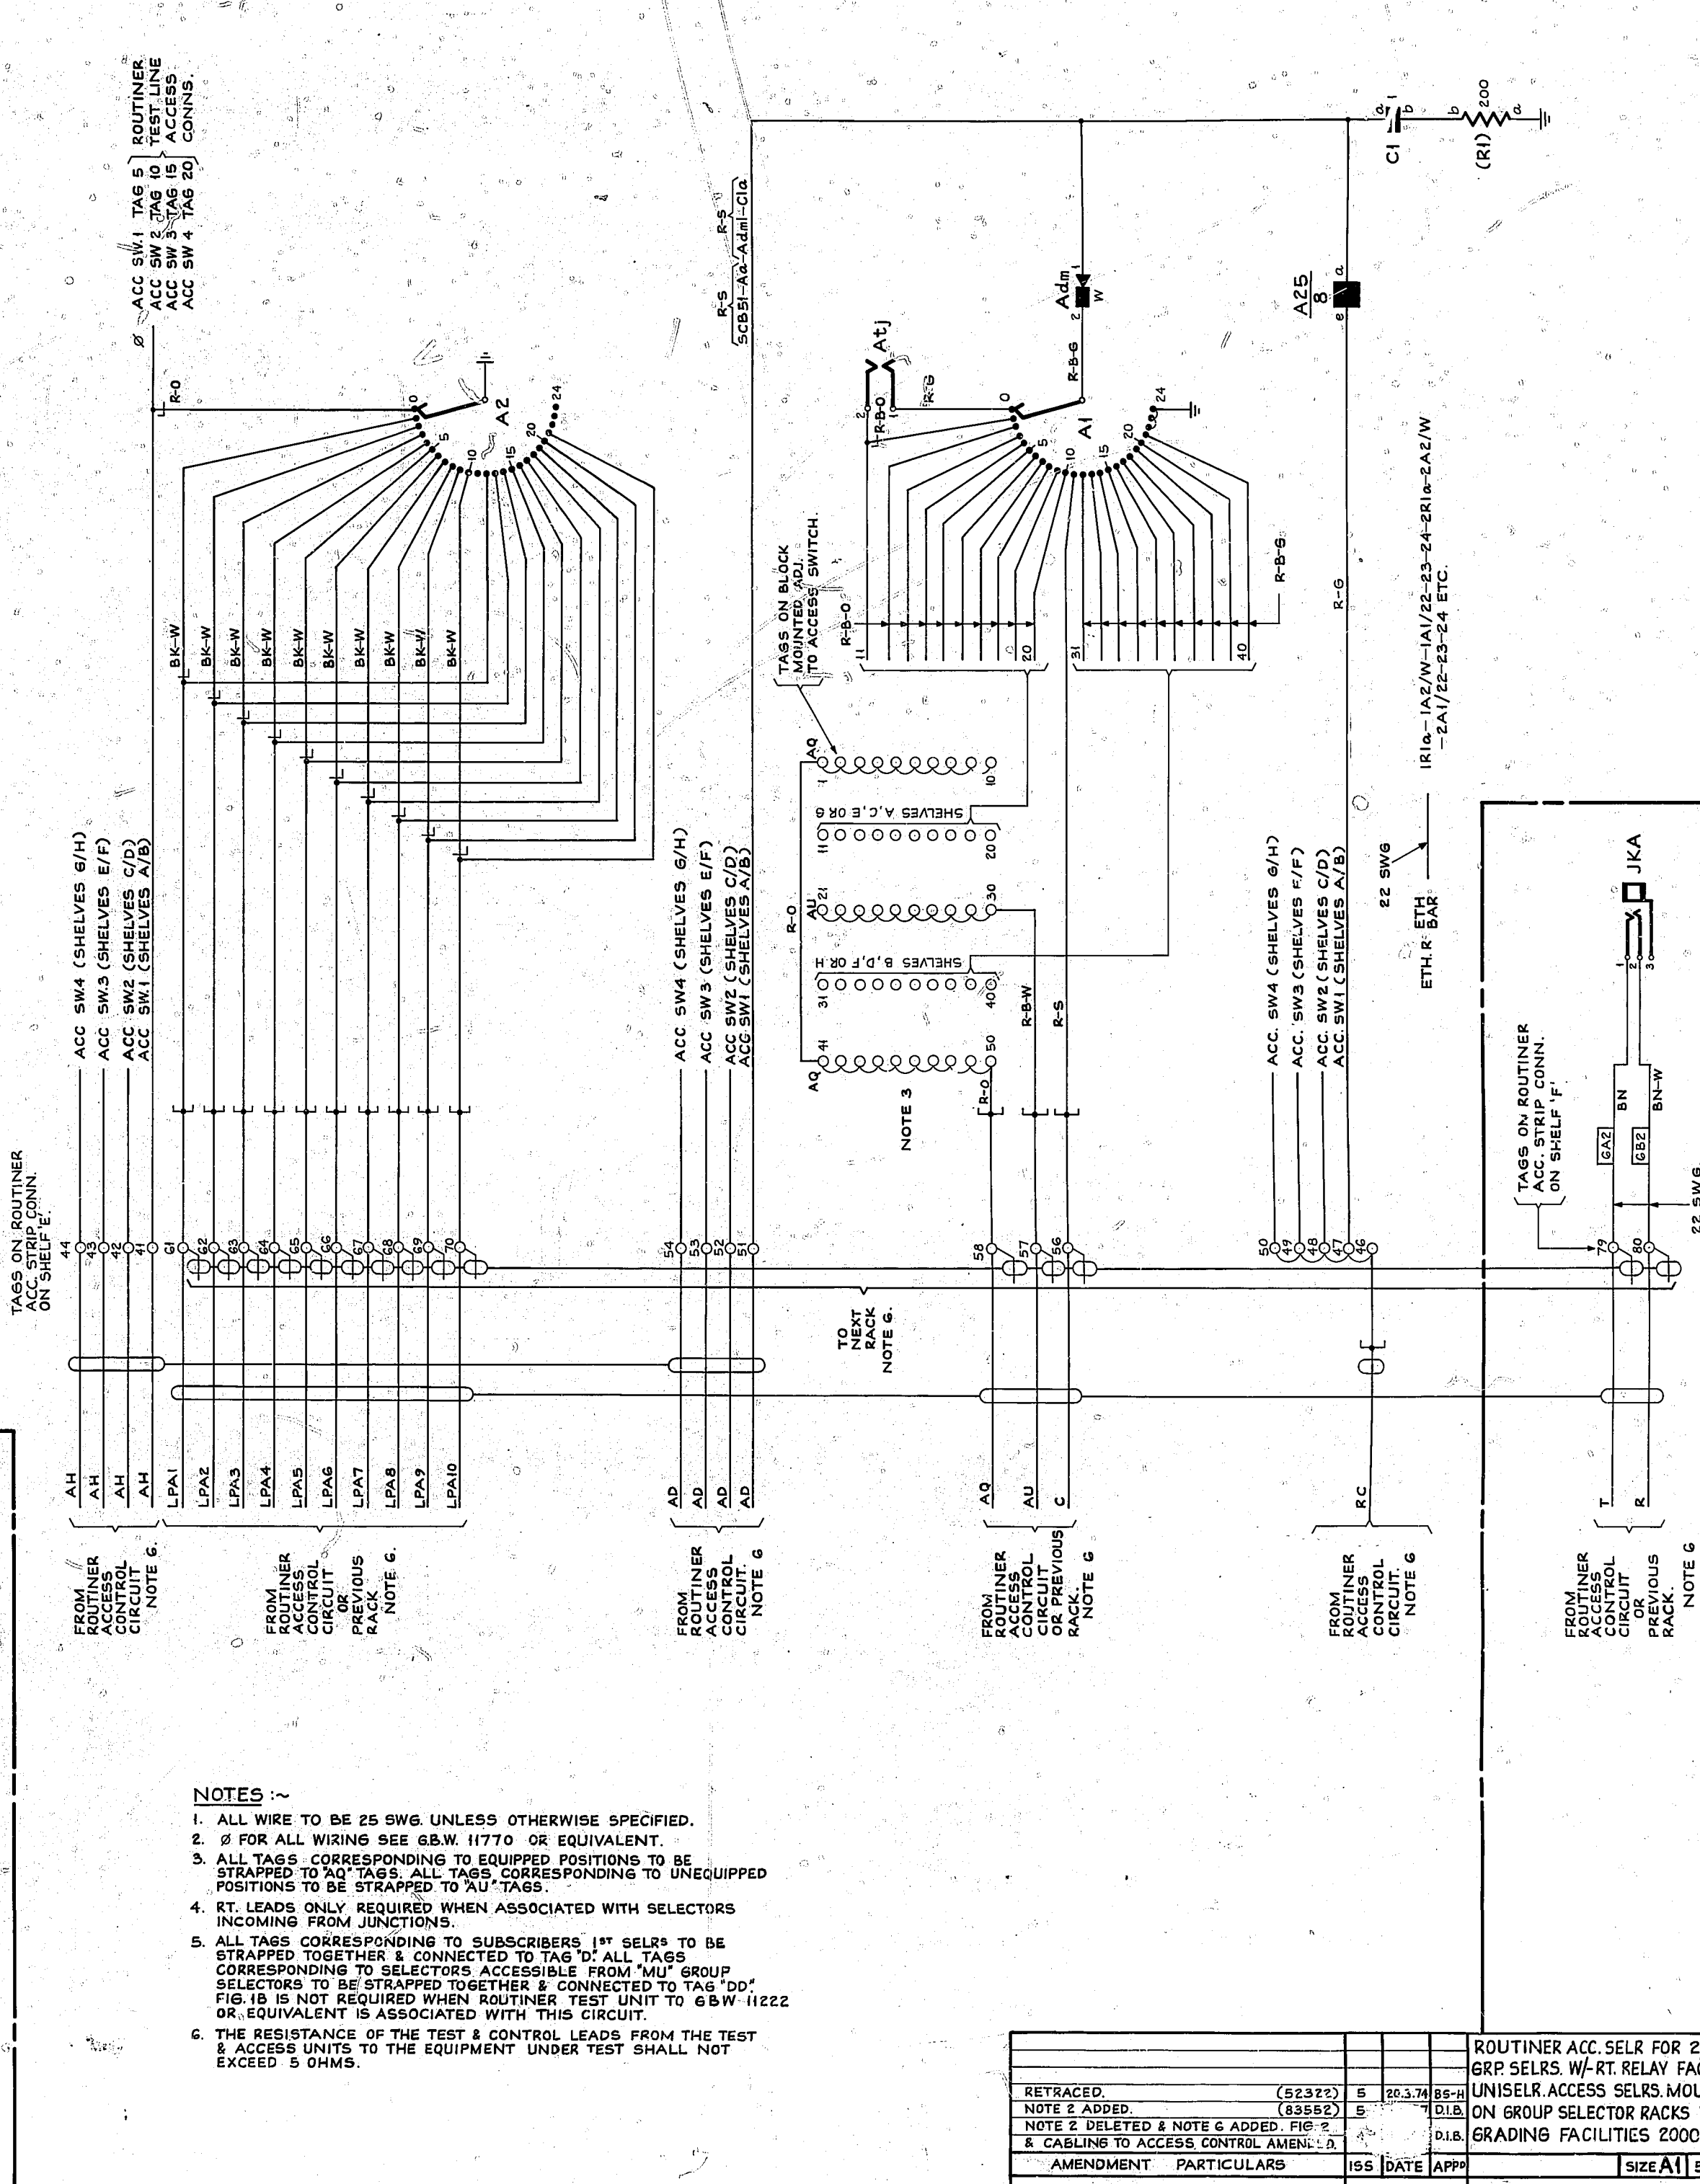


FIG. 2 ROUTINER RESET JACK

NOTES

1. ALL WIRE TO BE 25 SWG. UNLESS OTHERWISE SPECIFIED.
2. Ø FOR ALL WIRING SEE G.B.W. 11770 OR EQUIVALENT.
3. ALL TAGS CORRESPONDING TO EQUIPPED POSITIONS TO BE STRAPPED TO 'AQ' TAGS. ALL TAGS CORRESPONDING TO UNEQUIPPED POSITIONS TO BE STRAPPED TO 'AU' TAGS.
4. RT LEADS ONLY REQUIRED WHEN ASSOCIATED WITH SELECTORS INCOMING FROM JUNCTIONS.
5. ALL TAGS CORRESPONDING TO SUBSCRIBERS 1st SELRS TO BE STRAPPED TOGETHER & CONNECTED TO TAG 'D'. ALL TAGS CORRESPONDING TO SELECTORS ACCESSIBLE FROM 'MU' GROUP SELECTORS TO BE STRAPPED TOGETHER & CONNECTED TO TAG 'DD'. FIG. 1B IS NOT REQUIRED WHEN ROUTINER TEST UNIT TO G.B.W. 11222 OR EQUIVALENT IS ASSOCIATED WITH THIS CIRCUIT.
6. THE RESISTANCE OF THE TEST & CONTROL LEADS FROM THE TEST & ACCESS UNITS TO THE EQUIPMENT UNDER TEST SHALL NOT EXCEED 5 OHMS.

RETRACED.	(52322)	5	20.3.74	85-H	
NOTE 2 ADDED.	(83552)	5		D.I.B.	
NOTE 2 DELETED & NOTE 6 ADDED. FIG. 2 & CABLING TO ACCESS CONTROL AMEN. L.D.				D.I.B.	
AMENDMENT PARTICULARS	ISS	DATE	APP	SIZE	A1 50V C