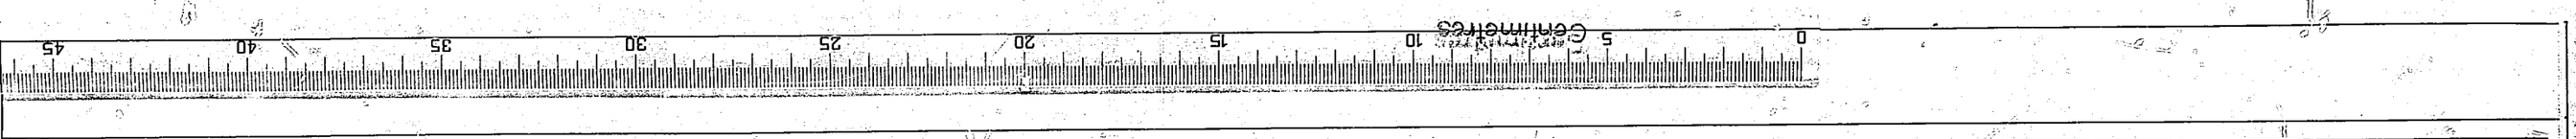

FIG.1A EXCLUSIVE SERVICE

1 PER SUB
NOTE 7

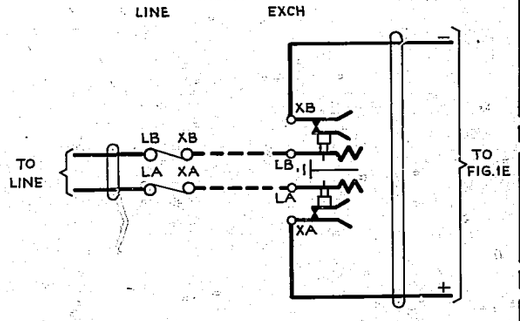

FIG.1B EXCLUSIVE SERVICE

1 PER SUB
NOTE 7

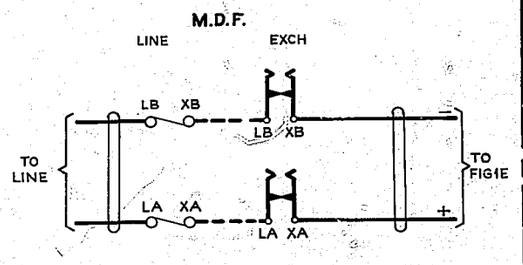

FIG.1C P.B.X. BUSYING 1 PER P.B.X. LINE M.D.F.

NOTES 6 &7

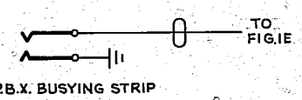

FIG.1E. EXCLUSIVE SERVICE

1 PER SUB

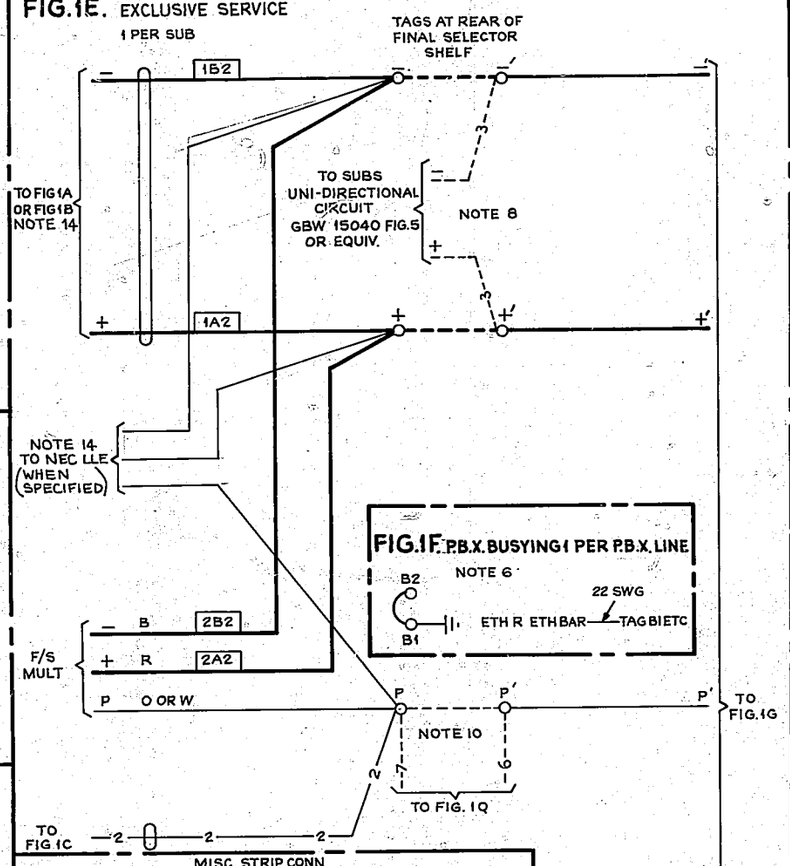

FIG.1F P.B.X. BUSYING 1 PER P.B.X. LINE

NOTE 6

FIG.1Q NOTE 10

FIG.1G EXCLUSIVE SERVICE 1 PER SUB
2 PARTY SERVICE 1 PER 2 SUBS

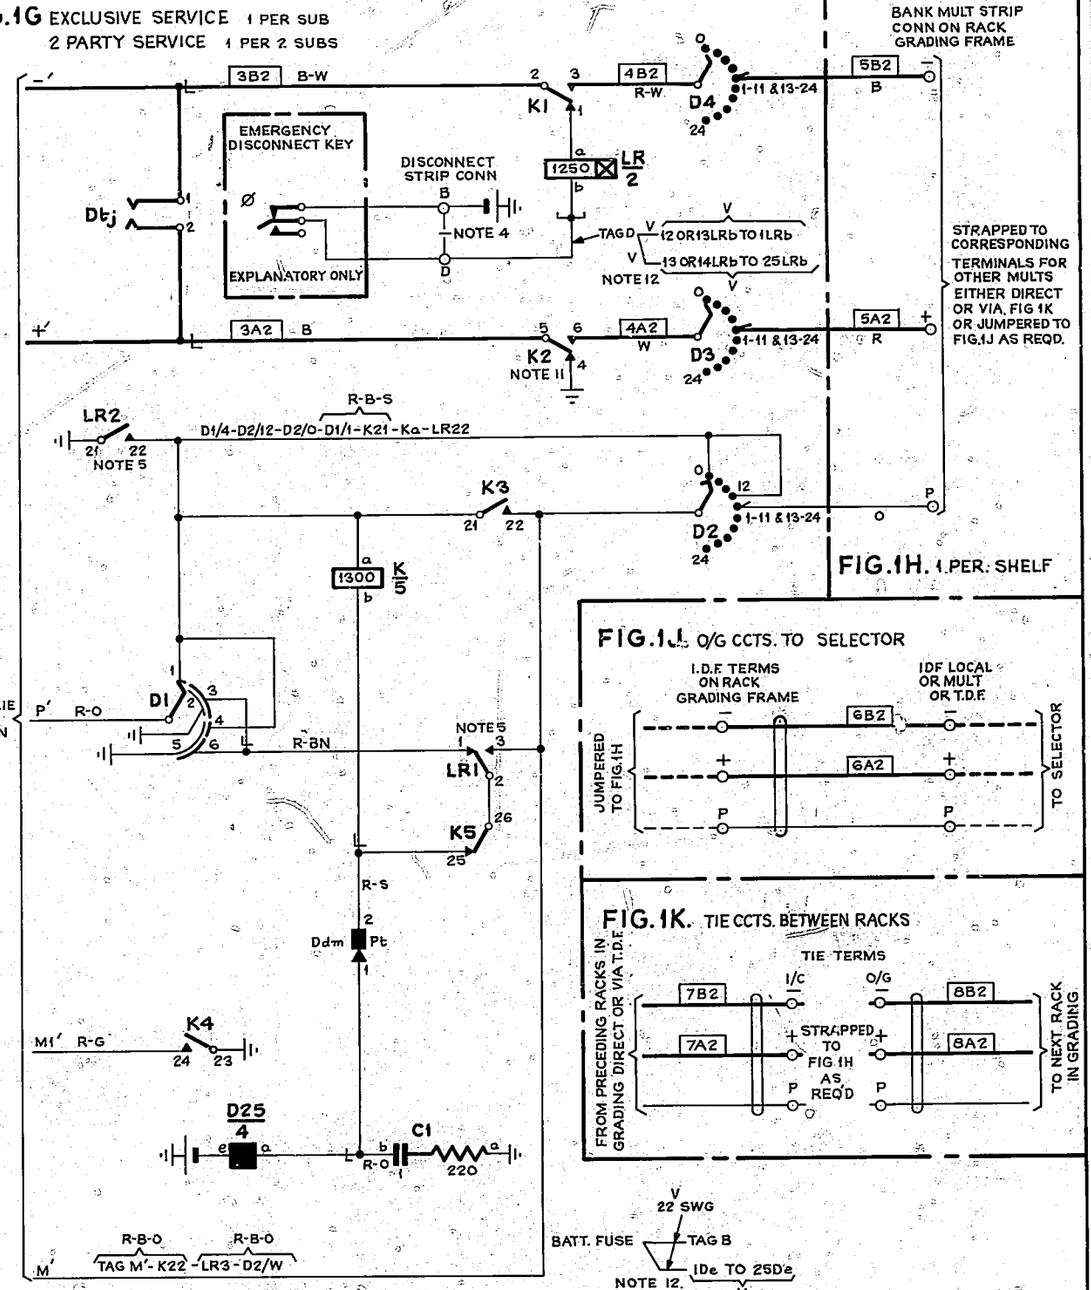

FIG.1H. 1 PER SHELF

FIG.1J. O/G CCTS. TO SELECTOR

FIG.1K. TIE CCTS. BETWEEN RACKS

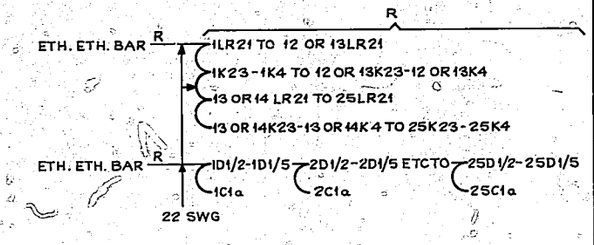

FIG.1L. 2 PARTY SERVICE

1 PER 2 SUBS
NOTE 7

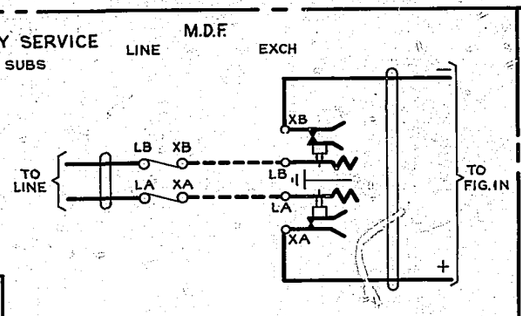

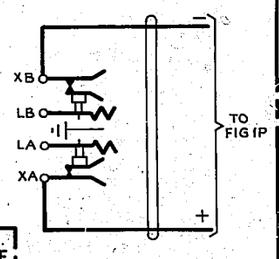

FIG.1M. 2 PARTY SERVICE

1 PER 2 SUBS.
NOTE 7

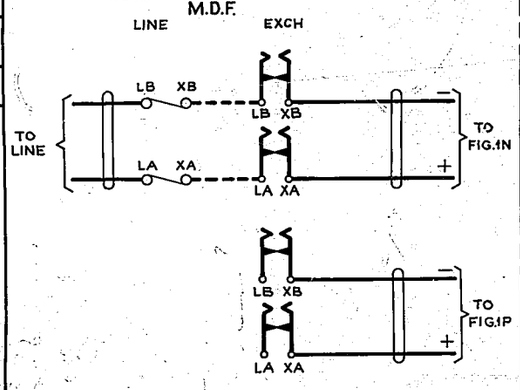

FIG.1N. 2 PARTY SERVICE

1 PER 'X' PARTY SUB

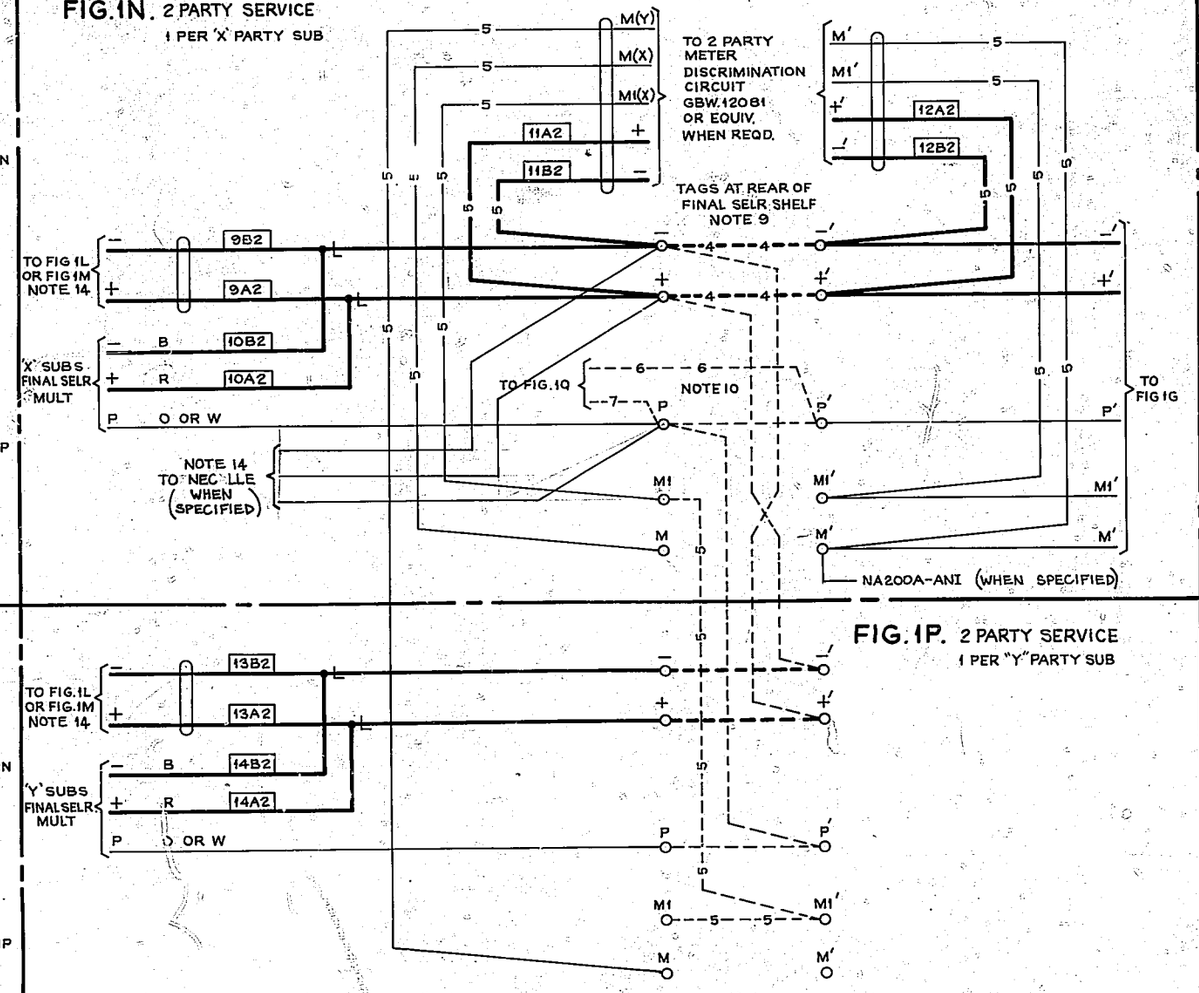

FIG.1P. 2 PARTY SERVICE

1 PER "Y" PARTY SUB

NOTES:-

1. FUSING:- 1·0A PER 25 CIRCUITS.
2. ALL WIRE TO BE 25 S.W.G. UNLESS OTHERWISE SPECIFIED.
3. Ø FOR WIRING SEE GBW 16400 OR EQUIVALENT.
4. INITIAL WIRING TO INCLUDE STRAP SHOWN---1---1---ON DISCONNECT STRIP CONN.
5. SPRINGS LR21 & LR22 NOT TO MAKE BEFORE SPRINGS LR2 & LR3.
6. WHEN FIG.1C IS NOT EQUIPPED, TRANSFER LINK FROM B1-B2 TO B1-P FOR P.B.X. BUSYING WHEN FIG.1C IS EQUIPPED, USE BUSYING PEG FOR P.B.X. BUSYING
7. AT EXCHANGES WITH FLOOR TYPE M.D.F. USE FIGS.1A & 1C OR FIG.1L AT EXCHANGES WITH RACK TYPE M.D.F. OR WITH FLOOR TYPE M.D.F. FITTED WITH TEST JACKS Nº 32 USE FIG. 1B OR FIG.1M.
8. WHEN USED FOR UNI-DIRECTIONAL LINE (TRAFFIC TO EXCH) DELETE NORMAL - + & P LINE JUMPERS & INSERT JUMPERS SHOWN---3---3---
9. FOR 2 PARTY LINE WORKING WITHOUT METER DISCRIMINATION FACILITY USE JUMPERS SHOWN----&---4---4---
   FOR 2 PARTY LINE WORKING WITH METER DISCRIMINATION FACILITY USE JUMPERS SHOWN---&---5---5--- & CONNECTIONS SHOWN—5—5—
10. WHEN SEPARATE RECORDING OF I/C & O/G TRAFFIC IS NOT REQUIRED, INSERT JUMPER SHOWN--6---6--
    WHEN SEPARATE RECORDING OF I/C & O/G TRAFFIC IS REQUIRED, OMIT NORMAL P LINE JUMPER & INSERT JUMPERS SHOWN,
    ---6---6---- & ---7---7---7---.
11. WHEN LINE CIRCUIT IS ASSOCIATED WITH A P.A.B.X. EXCHANGE LINE CIRCUIT GBW 15220 OR EQUIVALENT THE EARTH TO BE REMOVED OFF K4 (FIG. 1G).
12. ON SOME EARLY EQUIPMENT V WAS BK OR W.
13. ON SOME EARLY EQUIPMENT VALUE OF C1 IN FIG.1G WAS 0·45.
14. WHEN NEC LLE IS USED PROVIDE CONNECTIONS SHOWN AND REMOVE + AND — TO FIGS 1A, 1B, 1L OR 1M AS REQUIRED.

AMENDMENT PARTICULARS	ISSUE	DATE.	APD
NEC LLE & ANI CONNECTIONS SHOWN (70499) 5A 13·3·81 J.R			
RETRACED. (52306) 5 4·2·74 B.S.H			
NOTE 13. ADDED. (48493) 5 17·3·71 B.S.H			
	1	—	—

N.Z.P.O.

SUBSCRIBERS LINE CIRCUIT WITH SUBSCRIBERS DISCONNECT
COMPOSITE U/S & F/S RACKS 2000 TYPE

REF:- ES.124 | SIZE M | 50V | C

GBW 16380