


VARIO ADDED	(22/55)	5	5/12/72	BS11
VARIO 3-WAY ADDED	CA RELAY HAD 2 CONTACTS (R13)	4	4-3-71	BS11
VARIO 2-WAY ADDED	MINOR CIRCUIT MODIFICATIONS NOTE 5 (R67)	3	12-8-69	BS11
VARIO 1-WAY ADDED	3-DIGIT RELAYS & NOTES 6 & 7 REVISSED NOTE 8 ADDED	2		
VARIO 0-WAY ADDED	3-DIGIT DISCRIM. EQUIPMENT DELETED	1		
AMENDMENT PARTICULARS				
DRAWN				
CHECK'D				
WIRING				
CIRCUIT				
DATE				
APPROV'D				
REF. DRAWING				
GBW 16671				
U.A.X. No. N.Z. 13				
OUTGOING JUNCTION				
TERMINAL U.A.X.				
TO PARENT EXCHANGE				

- NOTES:
- FUSE -1.0A PER CIRCUIT.
  - ALL WIRING TO BE 0.5mm UNLESS OTHERWISE SPECIFIED.
  - Ø FOR WIRING SEE GBW 13730 OR EQUIV.
  - UNLES: OTHERWISE SPECIFIED ALL TERMS ARE ON STRIP CONN AT REAR\* AND ARE DESIGNATED SC IN WIRING RUNS.
  - DELETED.
  - TAG 'M' IS CONNECTED TO THE JUNCTION LEVEL GIVING DIRECT ACCESS TO THE PARENT MANUAL EXCHANGE. TAG 'M' IS CONNECTED TO THE SUBSCRIBER DIALLED JUNCTION LEVEL.
  - WHEN DIAL TONE SUPPRESSION BY MEANS OF GBW 15510 IS PROVIDED USE CABLING SHOWN —3—3— OTHERWISE USE CABLING SHOWN —2—2— IF CIRCUIT IS BOTHWAY WORKING.
  - PRIOR TO ISSUE 2, BATT. WIRING COLOUR WAS BK OR W.
  - TERMINALS SC5,7,8,10,15 TO 18,20,21,28,32,42,40 & 50 ARE PROVIDED BUT NOT CABLED.

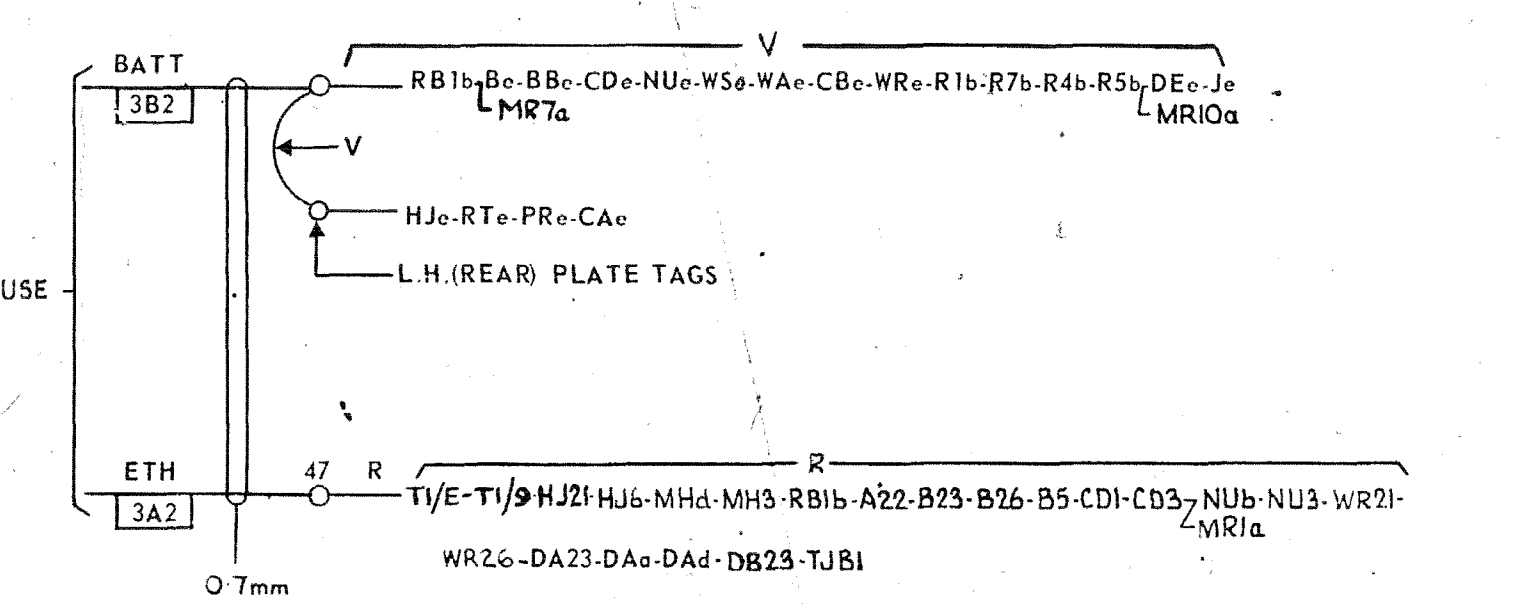

SUPERSEDED BY GBW 20100 FOR NEW WORK

TO JUNCTION VIA I.D.F. MULT.

TO I/C EQUIPT. (WHEN B.W) (GBW 13980) OR EQUIV. VIA I.D.F. LOCAL

CABLED WITH P, M & MI LEADS (WHEN REQD)

TO DIAL TONE SUPPRESSION CCT. GBW 15510 OR EQUIV. DIRECT (WHEN REQD)