

FIG. 1. M.A.R.  
NOTE. 3


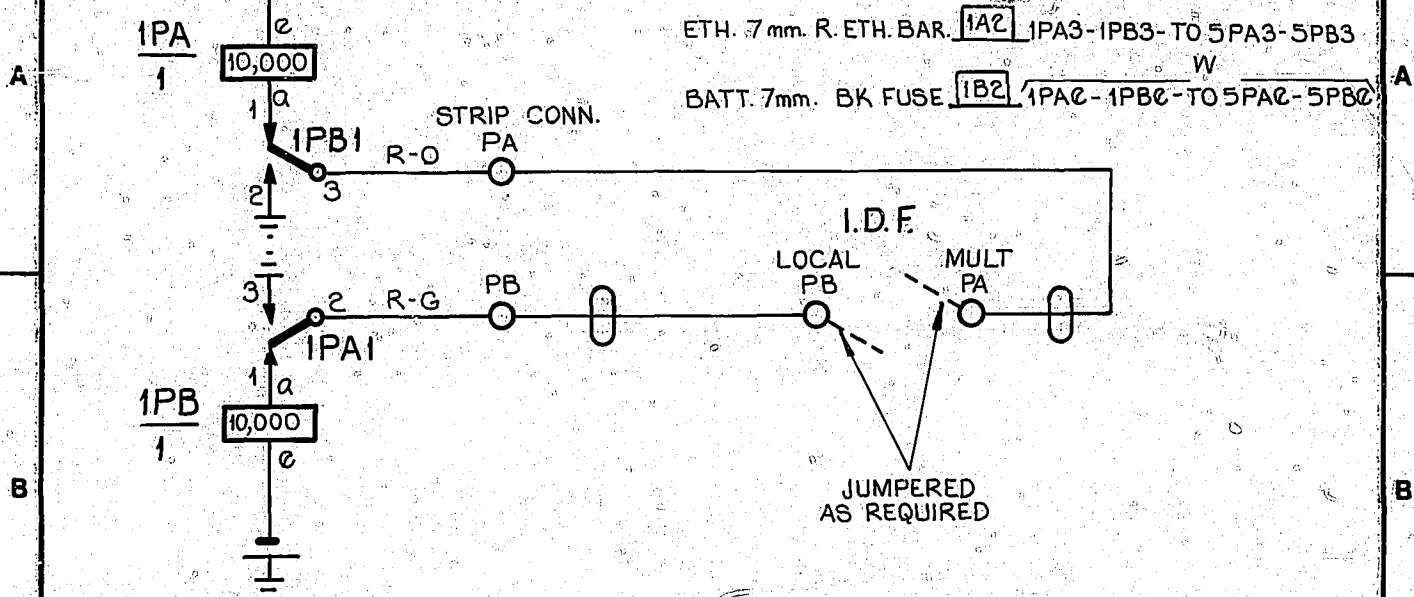


FIG. 2. R.S.R.  
NOTE. 3

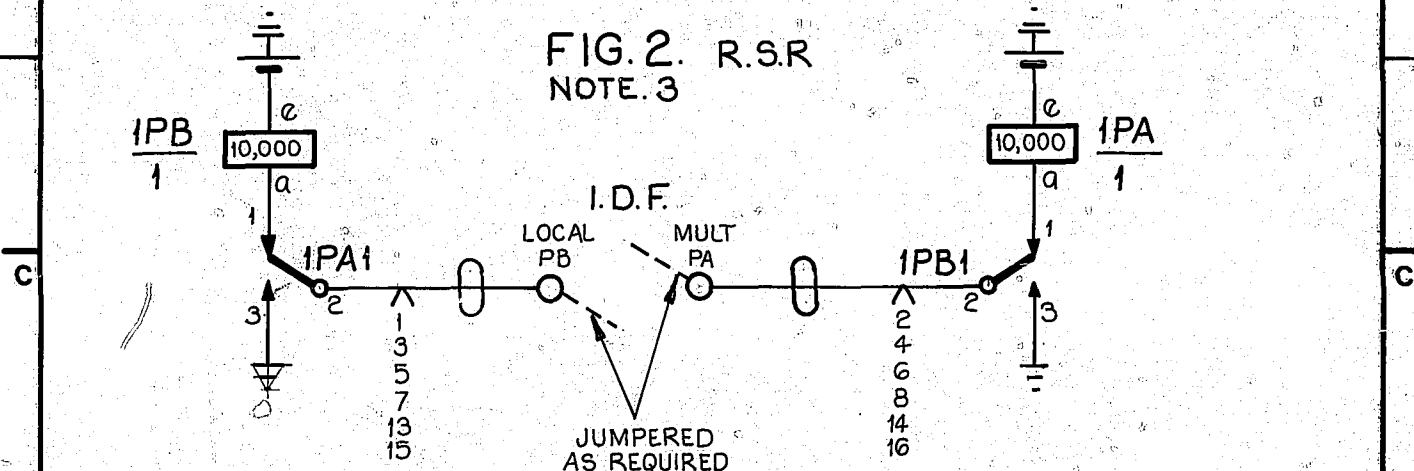

ETH. 7mm. R. ETH. BAR **1A2** U11 ETH. R. U11 - 1PA3-TO 6PA3-6PB3 TO 1PB3  
BATT. 7mm. BK FUSE **1B2** U12 BATT. W. U12 - 1PA0-TO 6PA0-6PB0 TO 1PB0

PROOF

NOTES:

- FUSING: FIG. 1. 1.5A PER 5CCTS.  
FIG. 2. 1.5A PER 6CCTS.
- ALL WIRING TO BE 5mm. UNLESS OTHERWISE SPECIFIED
- WHEN STRIP MOUNTED EQUIPMENT IS SPECIFIED USE FIG. 1 FOR JACKED IN EQUIPMENT USE FIG. 2

50V S

P-WIRE REPEATER  
EARTH TESTING SELECTORS  
NON-METERING

1 22.6.81 (27208) REDRAWN  
A 20.11.64 (31312)

NZPO ENGINEER-IN-CHIEF, WELLINGTON

UD 234  
ISS DATE  
DRN HBB  
TCD A.G.

CHANGE  
CKD  
APPD  
ORIGIN S.S. SECT.  
STANDARD ATW 22001



SHT 10F1  
SIZE A4

GBW.16680