
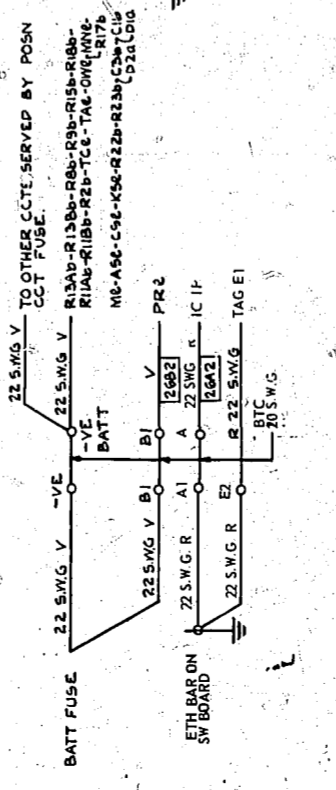


- NOTES:
1. FUSE 1.5A PER POSN. & ASSOC'D CCTS. POSITIVE BATT 0.5A PER CIRCUIT
  2. ALL WIRING TO BE 25 SWG UNLESS OTHERWISE SPECIFIED
  3. RESISTORS R5 & R6 HAVE NOT BEEN ALLOCATED

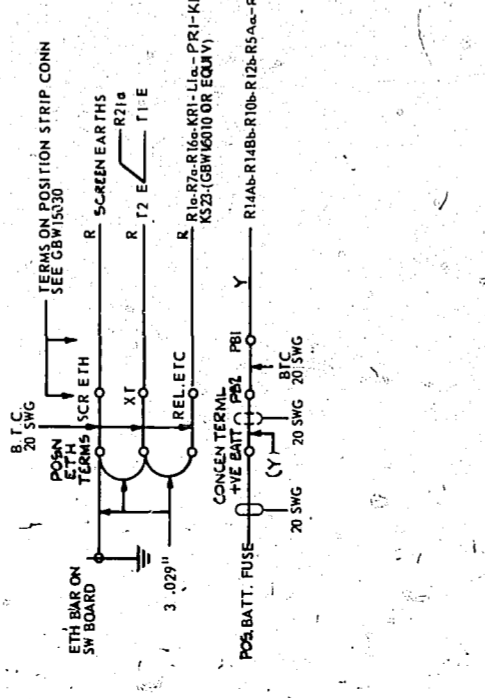

AMENDMENT PARTICULARS	ISS	DATE	APP	REF.
R5A & R5B WERE R6 IN NOTE DELETED (13796)	4	20/10/70	R.W.	
REVISIONS FOR REPAIR TO BE MADE IN REPAIR LOG (16178)	3	12/4/70	K.W.	
WIRING OF KR RELAY COILS REVISD.	2			
NOTE 2 ADDED	1			

POSITION CIRCUIT WITH KEY SEND CONTROL SYSTEM SLEEVE CONTROL INTERNATIONAL EXCHANGE