



FIG 1

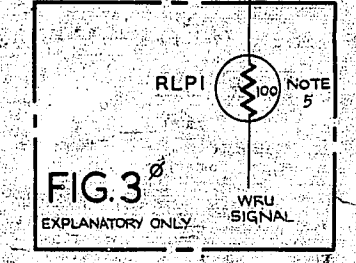

- NOTES-**
1. FUSING - 50V 1.5A PER CCT., 2.0V 1.0A PER 2 CCTS.
 2. → INDICATES DIRECTION OF TRANSMISSION
 3. SHELF JACK U POINTS 9 & 11 TO MAKE CONTACT WHEN RELAY SET IS REMOVED
 4. CAPACITOR C1 IS ADJUSTABLE IN 25 STEP TO SECURE A RELEASE LAG FOR RELAY CM WITHIN THE RANGE 350-500MS
 5. FIG 3 - RESISTOR BULB NO II, 100 OHMS PER TWO CCTS
 6. FOR GROUPS SERVING PHYSICAL LINES, INSERT STRAP U14-U16 SHOWN
 7. FOR GROUPS SERVING V.F. LINES REMOVE THIS STRAP
 8. UNLESS OTHERWISE SPECIFIED ALL WIRING TO BE 25 SWG
 9. FOR WIRING SEE GBW 17360 OR EQUIV.

AUTOMATIC TELEX SYSTEM			
SUPERVISORY & METERING			
RELAY SET			
REVISION	DATE	BY	CHKD
1	17/2/61	10/4/64	06
2	27/2/63	12/1/64	14
AMENDMENT PARTICULARS		ISSUE DATE	APPRO
NZPO		17/2/61	10/4/64
DRAWN		CHKD	CIRCUIT
GBW 1,540			

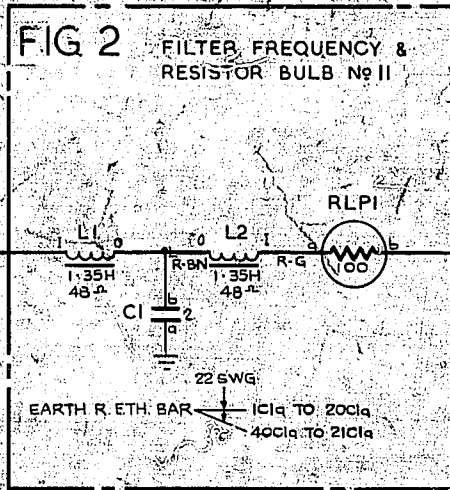