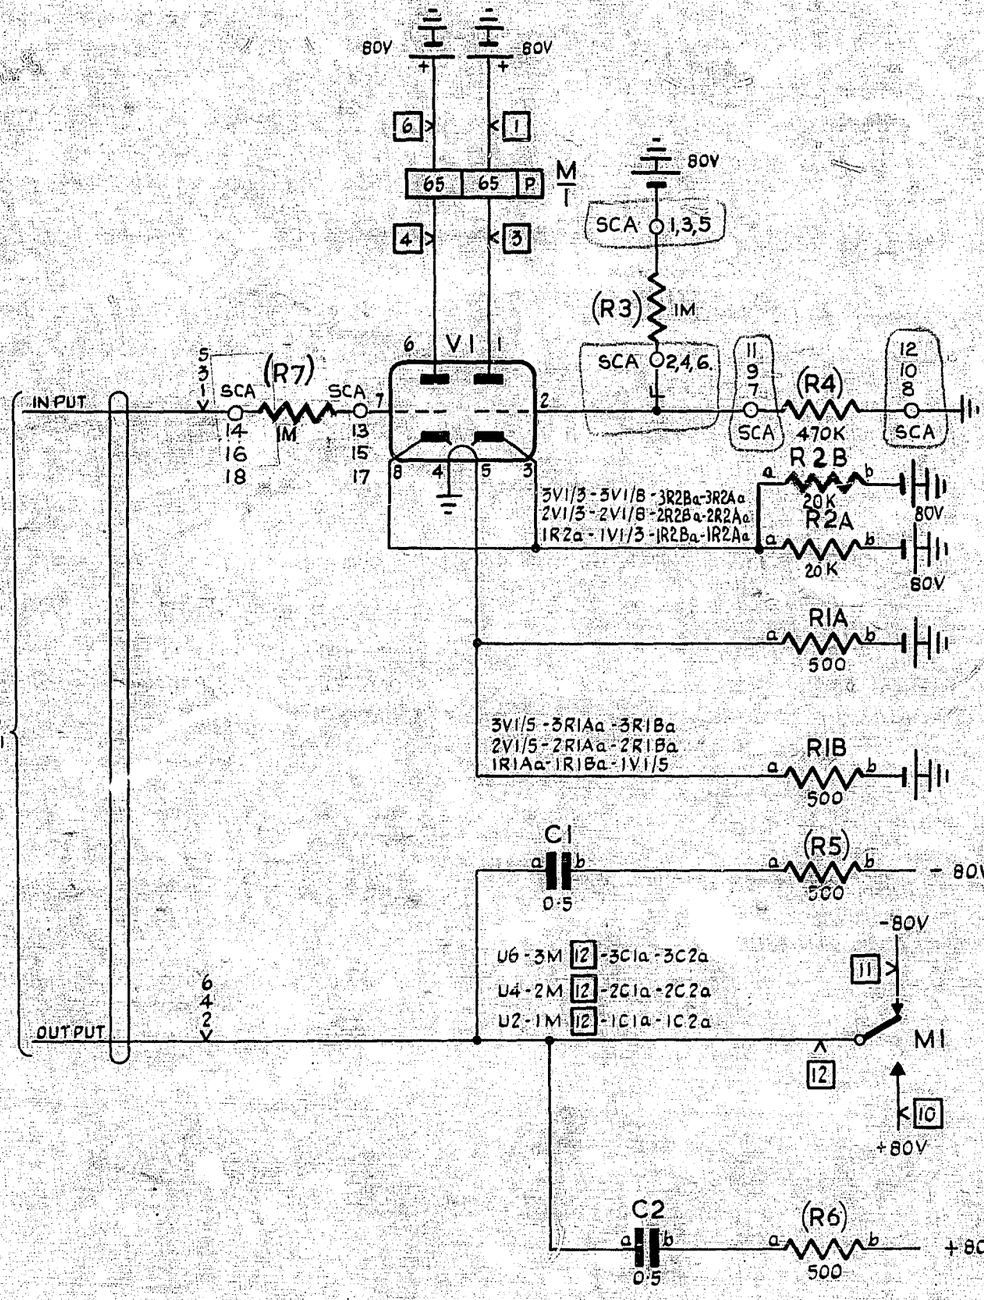

RESISTORS BULB

Ø EXPLANATORY ONLY

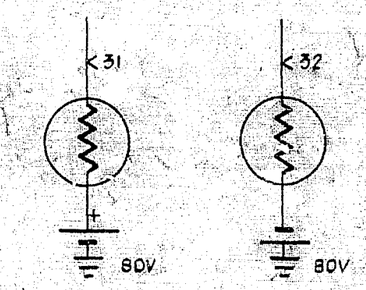



VALVE HOLDER
(UNDERSIDE WIRING VIEW)

NOTES:-

1. FUSING :- -50V 1·5A PER RELAY SET (3CCTS)
   -80V 1·5A " " " " "
   +80V 1·5A " " " " "
2. ALL WIRING TO BE 0·5 mm. UNLESS OTHERWISE SPECIFIED.
3. Ø FOR WIRING SEE GBW 17350 OR EQUIV.
4. ON SOME EARLY EQUIPMENT - 50 V BATTERY WIRING IS W, -80 V WIRING IS BK AND +80V WIRING IS O.

0·7mm

+ 80V BATT. Y FUSE — U29
- 80V BATT. V FUSE — U30
- 50V BATT. V FUSE — U12
EARTH R. ETH. BAR — U11

+ 80V BATT Y U31 - 3M 10 - 2M 10 - 1M 10 - 1R6b - 2R6b - 3R6b
+ 80V BATT Y U29 - 3M 1 - 3M 6 - 2M 1 - 2M 6 - 1M 1 - 1M 6
- 80V BATT V U32 - 3M 11 - 2M 11 - 1M 11 - 1R5b - 2R5b - 3R5b
- 80V BATT V U30 - SCA1, - SCA3 - SCA5 - 3R2Bb - 3R2Ab - 2R2Bb - 2R2Ab - 1R2Bb - 1R2Ab
- 50V BATT V U12 - 1R1Ab - 1R1Bb - 3R1Ab - 3R1Bb - 2R1Ab - 2R1Bb
EARTH R U11 - SCA8 - SCA10 - SCA12 - 1V1/4 - 2V1/4 - 3V1/4

TJ 1 2 — T J / 2

AMENDMENT PARTICULARS	ISSUE	DATE	APPD
R3, R4 & R7 WERE MTD. ON VALVE & ADAPTOR TAGS (30378)	3	27·3·72	A.D.P.
R7 ADDED R2 WAS SINGLE 10K Ω RESISTOR (46559)	2	24·8·66	JWE
(77762).	1	2·5·63	[illegible]

AUTOMATIC TELEX SYSTEM

MONITORING RELAY SET

SIZE : S | 50V | E

N.Z.P.O.			DRAWN	CHECKED	WIRING	CIRCUIT

GBW 17640