


FIG.1

TEST DESK - TEST POSITION  
1 PER POSN PER SUPERVISORY R/S.

FIG.2

M.A.R.  
1 PER TEST SUPY ACCESS

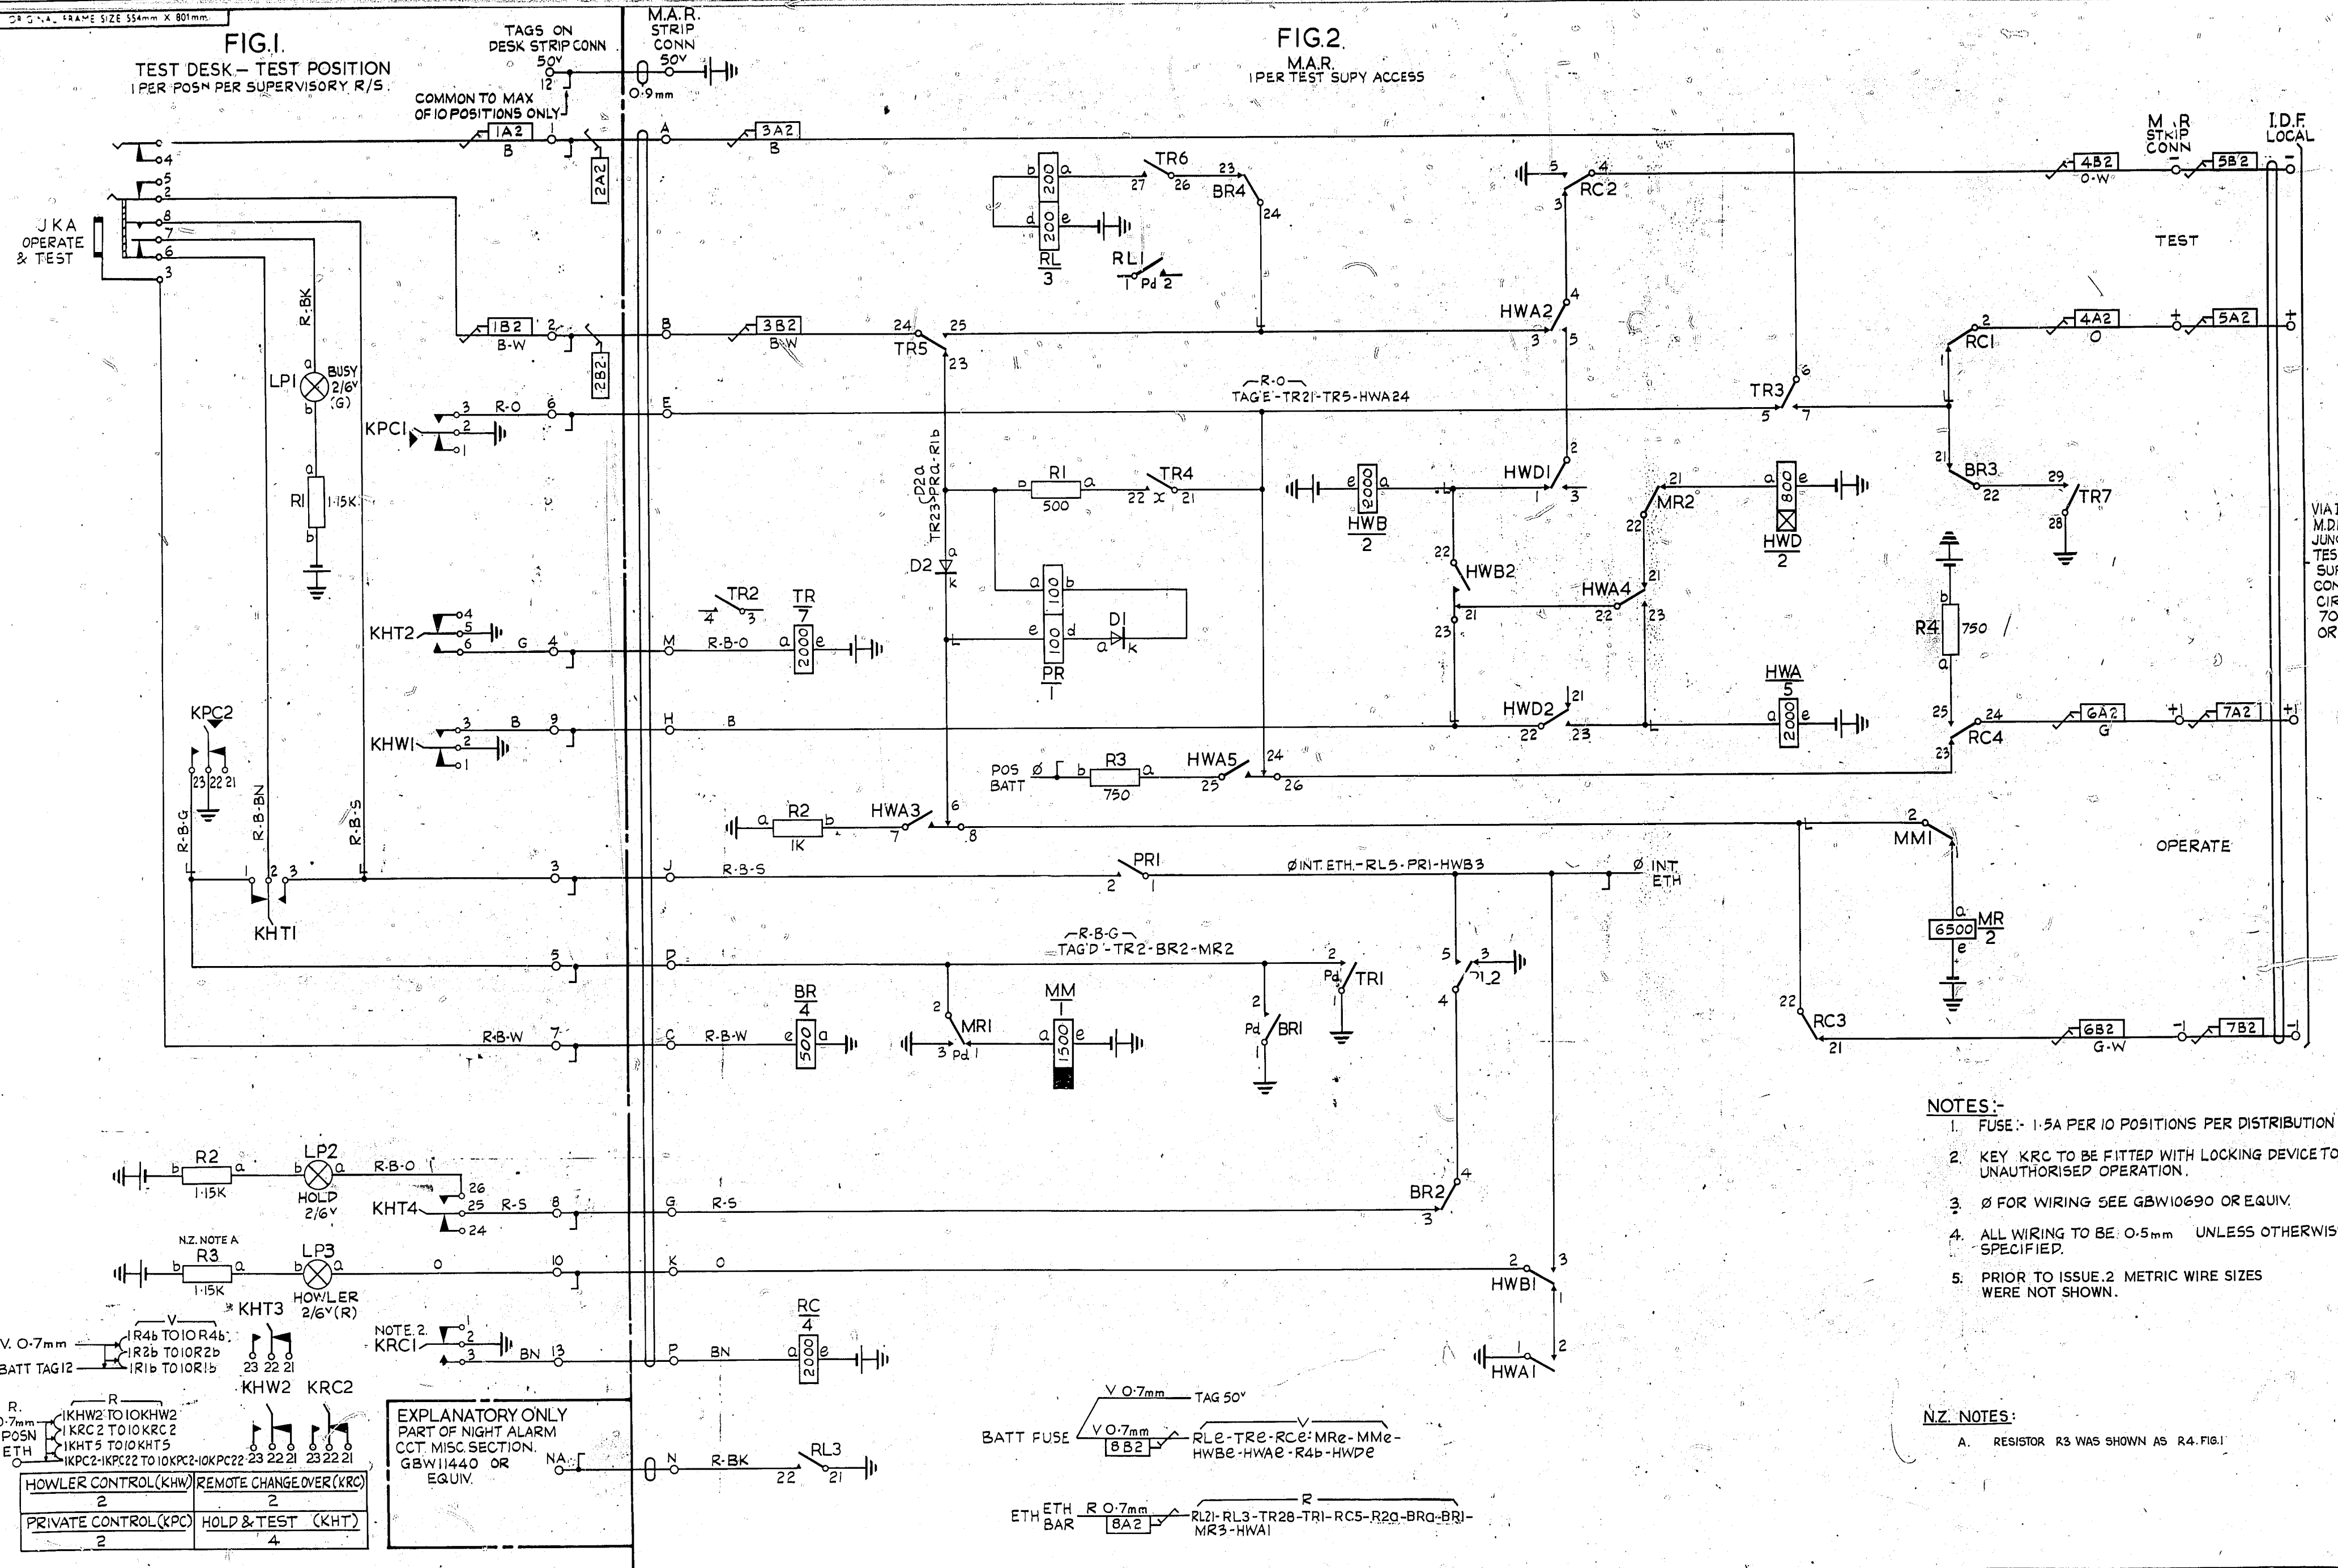


- NOTES:-**
- FUSE: 1.5A PER 10 POSITIONS PER DISTRIBUTION CCT.
  - KEY KRC TO BE FITTED WITH LOCKING DEVICE TO PREVENT UNAUTHORISED OPERATION.
  - Ø FOR WIRING SEE GBW10690 OR EQUIV.
  - ALL WIRING TO BE 0.5mm UNLESS OTHERWISE SPECIFIED.
  - PRIOR TO ISSUE 2 METRIC WIRE SIZES WERE NOT SHOWN.

**N.Z. NOTES:**  
A. RESISTOR R3 WAS SHOWN AS R4.FIG.1

**EXPLANATORY ONLY**  
PART OF NIGHT ALARM  
CCT. MISC SECTION.  
GBW11440 OR  
EQUIV.

DRN	L.H.	ENG
TR	APPROVED	MTH
CHK	EF	DRFT
ENG	DEPT.	
NZPO		



TOLERANCES (UNLESS OTHERWISE STATED)				MATERIAL	FINISH	REF.
THREE PLACE DEC. DIMS						
TWO PLACE DEC. DIMS						
FRACTIONAL DIMENSIONS						
TITLE TEST DESK LINES TO TEST ACCESS SUPERVISORY RELAY SET AT TYE 2 TYPE EXCHANGE						
NZ NOTE A. ADDED.				(50165)	2A	18-1-72
LPS & KRS KEY DELETED NOTE BLANDED.				(50165)		
REVISION				DATE	APP P	
25	30	35	40	45	50	55
GBW20170						